


| WIRING | | |
|---|---|---|
| MALE PIN # | | FEMALE PIN # |
| | | |
| 1 | ------- | 1 |
| 2 | ------- | 2 |
| 3 | ------- | 3 |
| 4 | ------- | 4 |
| 5 | ------- | 5 |
| 6 | ------- | 6 |
| 7 | ------- | 7 |

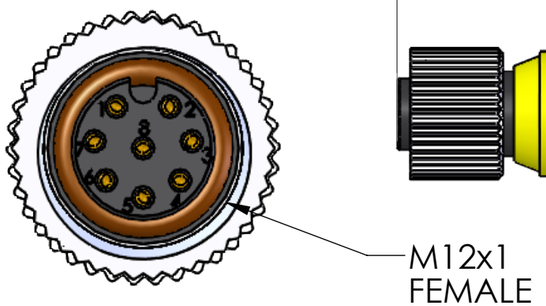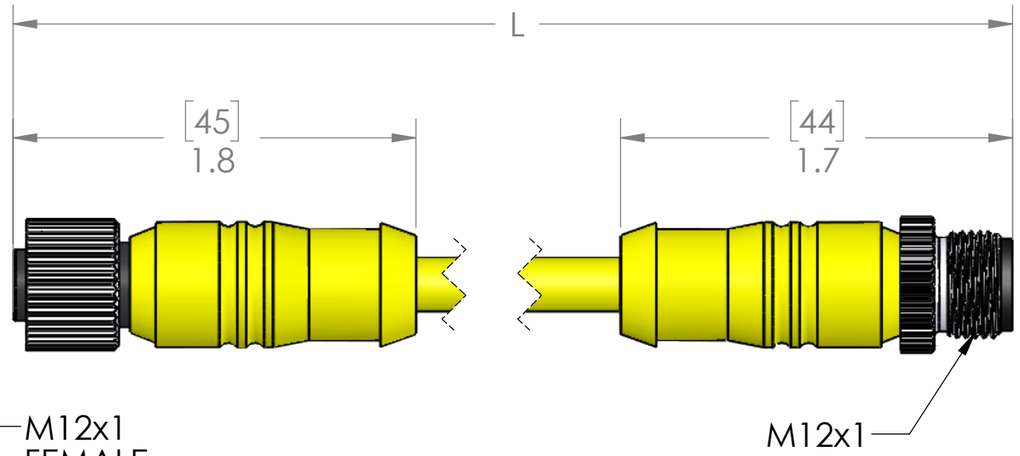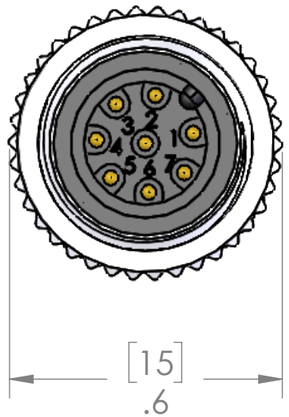


| P/N | L | STD? |
|---|---|---|
| MDCP-7MFP-1M | 40" [1m] | YES |
| MDCP-7MFP-2M | 79" [2m] | YES |
| MDCP-7MFP-3M | 118" [3m] | YES |
| MDCP-7MFP-4M | 157" [4m] | YES |
| MDCP-7MFP-5M | 197" [5m] | YES |
| MDCP-7MFP-6M | 236" [6m] | NO |
| MDCP-7MFP-8M | 315" [8m] | NO |
| MDCP-7MFP-10M | 393" [10m] | YES |
| MDCP-7MFP-15M | 591" [15m] | NO |
| MDCP-7MFP-20M | 787" [20m] | NO |
| MDCP-7MFP-30M | 1181" [30m] | NO |
| MDCP-7MFP-50M | 1968" [50m] | NO |

| | |
|---|---|
| MATERIALS | |
| BODY: | YELLOW PUR |
| CONTACTS: | GOLD PLATED COPPER ALLOY |
| CABLE: | |
| STYLE: | AWM |
| AWG: | 24/8 |
| JACKET: | YELLOW PUR |
| VOLTAGE: | 300V |
| SHIELD: | MYLAR W/DRAIN |
| COUPLING: | NICKEL PLATED BRASS |
| INSERT: | POLYAMIDE |
| O-RING: | FPM |
| | |
| APPROVALS | |
| US: | UL LISTED |
| CANADA: | C-UL LISTED |
| ROHS: | YES |
| CE & UKCA: | YES |
| | |
| RATINGS | |
| PROTECTION CLASS: | IEC IP69 |

DRAIN WIRE IS NOT CONNECTED
TO A PIN, OR TO EITHER COUPLING

PARTS LISTED AS NOT BEING STANDARD
MAY HAVE MINIMUM ORDER QUANTITIES

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

| | |
|---|---|
| VOLTS | 60V |
| AMPS | 2A |
| TEMP: | 80°C |

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]

MATERIAL

FINISH

DO NOT SCALE DRAWING

| | |
|---|---|
| DRAWN BY | ADM |
| DRAWN DATE | 06/22/2023 |
| CHECKED BY | JJH |
| CHECK DATE | 06/23/2023 |

COMMENTS:

MENCOM CORPORATION

TITLE:

SIZE B | DWG. NO. MDCP-7MFP-ZZ | REV B

SCALE: 1.5:1 | WEIGHT: | SHEET 1 OF 1