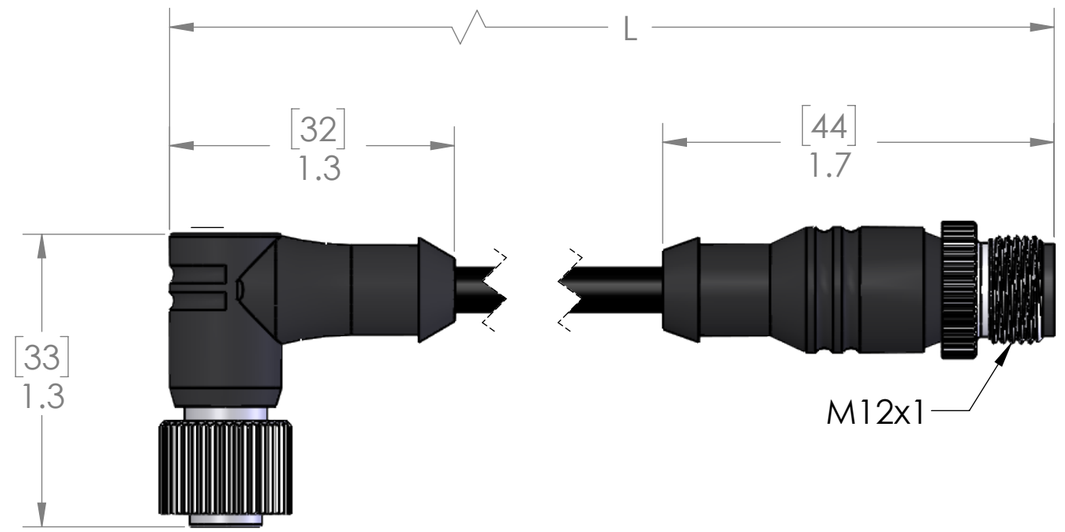
MALE		FEMALE
PIN #	Wiring	PIN #
1	---------	1
2	---------	2
3	---------	3
4	---------	4





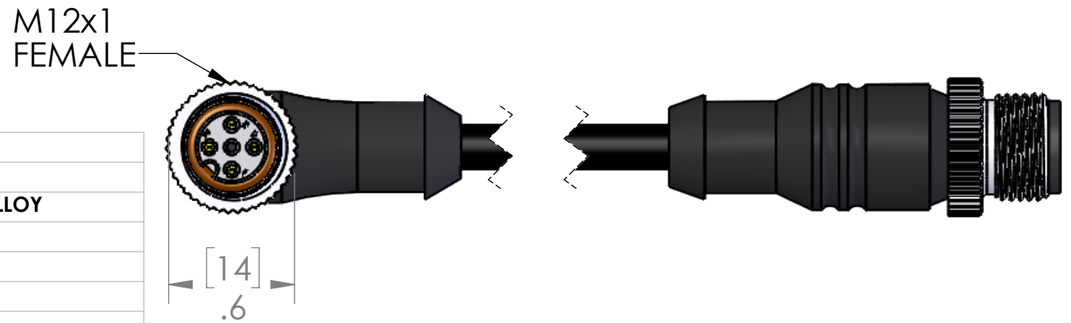


TABLE A		
P/N	L	STD?
MDCWF-4MFRP-0.5M	20" [0.5M]	NO
MDCWF-4MFRP-1M	40" [1M]	YES
MDCWF-4MFRP-1.5M	59" [1.5M]	NO
MDCWF-4MFRP-2M	79" [2M]	YES
MDCWF-4MFRP-3M	118" [3M]	NO
MDCWF-4MFRP-4M	157" [4M]	NO
MDCWF-4MFRP-5M	197" [5M]	YES
MDCWF-4MFRP-6M	236" [6M]	NO
MDCWF-4MFRP-8M	315" [8M]	NO
MDCWF-4MFRP-10M	393" [10M]	YES
MDCWF-4MFRP-15M	590" [15M]	YES
MDCWF-4MFRP-20M	786" [20M]	NO
MDCWF-4MFRP-25M	983" [25M]	NO
MDCWF-4MFRP-30M	1179" [30M]	NO

PARTS LISTED AS NOT BEING STANDARD
MAY HAVE MINIMUM ORDER QUANTITIES

MATERIALS	
BODY:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	
STYLE:	AWM
AWG:	22 AWG
JACKET:	BLACK TPE
VOLTAGE:	600V
SHIELD:	NO
FLEX CYCLES:	10 MILLION
COUPLING:	NICKEL PLATED BRASS
INSERT:	POLYAMIDE
O-RING:	FPM
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]
MATERIAL
FINISH
DO NOT SCALE DRAWING

DRAWN BY	JJH
DRAWN DATE	07/26/2023
CHECKED BY	JJH
CHECK DATE	07/26/2023

COMMENTS:

MENCOM CORPORATION

TITLE:
4 PL M-F EXT FEM R/A

SIZE	DWG. NO.	REV
B	MDCWF-4MFRP-ZZ	B

SCALE: 1.5:1 | WEIGHT: | SHEET 1 OF 1