


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	9/2/2008	

D

C

B


A

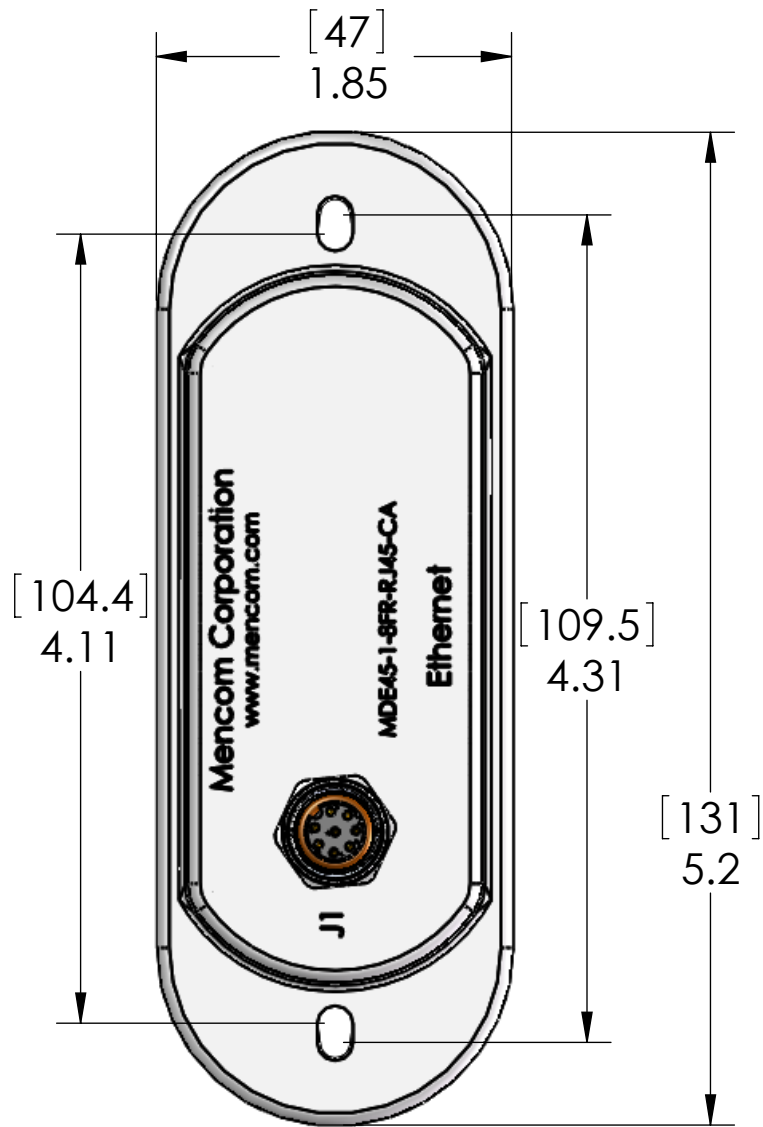



Included:

2 each 10-24 screws (for Form8 conduit bodies)
2 each 8-32 screws (for Mark 9 conduit bodies)
Can be mounted to 3/4" Form 8, Mark 9 and standard conduit bodies.


SPECIFICATIONS:	
HOUSING MATERIAL	GLASS FILLED PBT
RECEPTACLE HOUSING:	ANODIZED ALUMINUM
RECEPTACLE INSERT:	YELLOW PVC
RECEPTACLE CONTACTS:	GOLD PLATED COPPER ALLOY
OPERATING VOLTAGE:	40V
OPERATING CURRENT:	2A
OPERATING TEMPERATURE	-40°C - +70°C

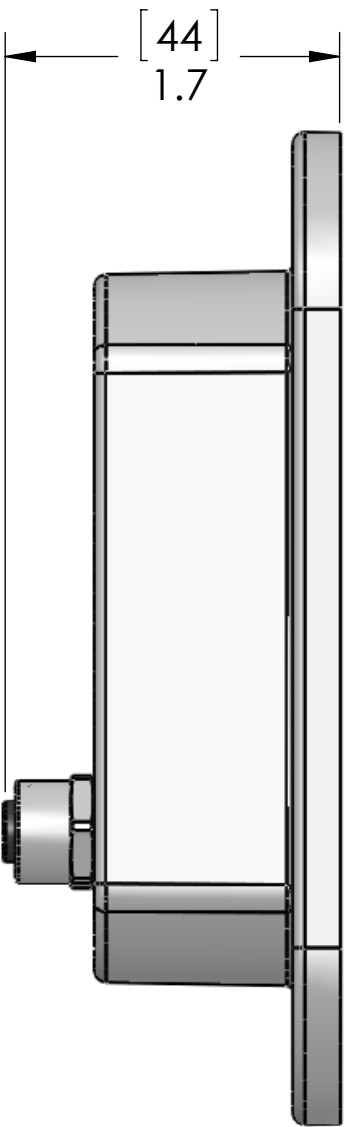

SEALING
GASKET

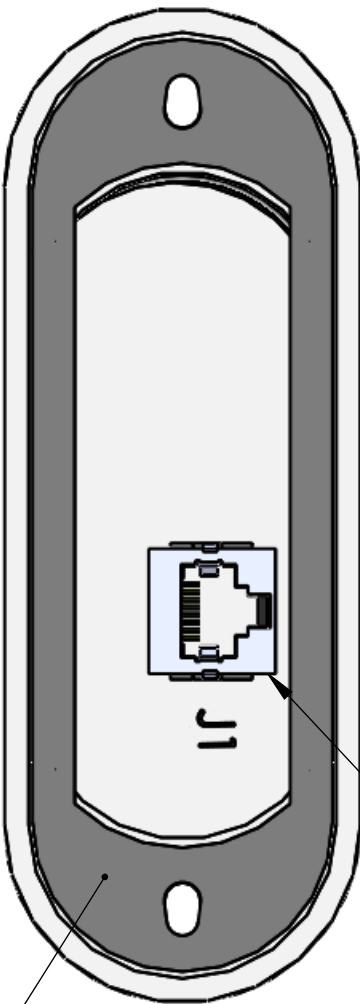

1 = White/Blue
2 = White/Brown
3 = Brown
4 = Orange (-TX)
5 = White/Green (+RX)
6 = White/Orange (+TX)
7 = Blue
8 = Green (-RX)



1 = White/Orange (+TX)
2 = Orange (-TX)
3 = White/Green (+RX)
4 = Blue
5 = White/Blue
6 = Green (-RX)
7 = White/Brown
8 = Brown

RJ45 Female
Jack

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:	NAME	MENCOM CORPORATION			
		DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	BEM	TITLE:		
			CHECKED				
			ENG APPR.				
			MFG APPR.				
			Q.A.				
			COMMENTS:		SIZE DWG. NO. REV B MDE45-1-8FR-RJ45-CA A		
		MATERIAL					
		FINISH					
		DO NOT SCALE DRAWING			SCALE: 1:1	WEIGHT:	SHEET 1 OF 1

D

C

B

A