



Ethernet (M12) Series Etherplug Receptacles

4 & 8 Conductor Ethernet Series Receptacles





PCB Mount & PCB Back Mount Receptacles | 250V, 4A | 30V, 2A | IP69/IP67 Rating




# of Poles	Male Faceview	Rating	Style	Male Receptacles	Female Receptacles
4 D-Coded IP69	 M12 x 1	250V 4A	Front Mount Straight	MDE45-4MR-PCB	MDE45-4FR-PCB
			Front Mount Right Angle	MDE45-4MR-PCB-R	MDE45-4FR-PCB-R
			Back Mount	MDE45-4MR-BM-PCB	MDE45-4FR-BM-PCB
8 A-Coded IP67	 M12 x 1	30V 2A	Front Mount Straight	MDE45-8MR-PCB	MDE45-8FR-PCB
			Front Mount Right Angle	MDE45-8MR-PCB-R	MDE45-8FR-PCB-R
			Back Mount	MDE45-8MR-BM-PCB	MDE45-8FR-BM-PCB




PCB Receptacles

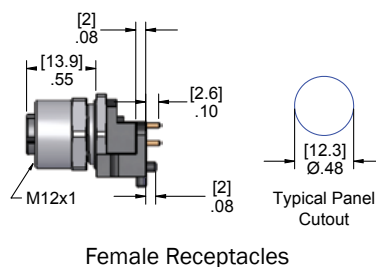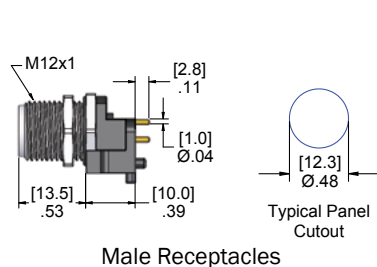

PCB Back Mount Receptacles



PCB Receptacles Right Angle

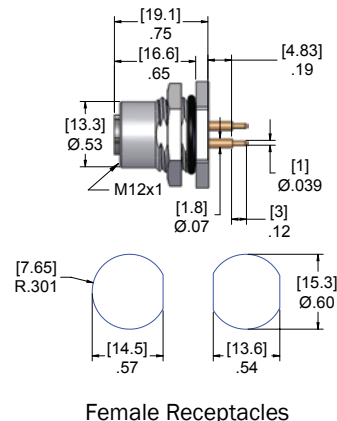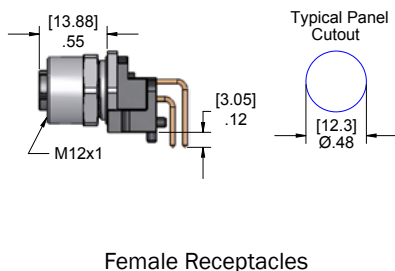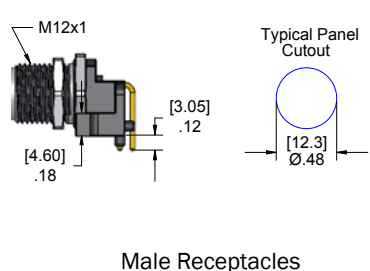

Specifications:

Body: Polyamide
 Contacts: Copper Alloy with Gold Plating
 Shell: Nickel Plated Brass
 O-Ring: NBR
 Jam Nut: Nickel Plated Brass
 Temperature: -40°C to 105°C (-40°F to +221°F)