MALE PIN #	WIRING	FEMALE PIN #
1	-------	1
2	-------	2
3	-------	3
4	-------	4
5	-------	5
6	-------	6
7	-------	7
8	-------	8
9	-------	9
10	-------	10

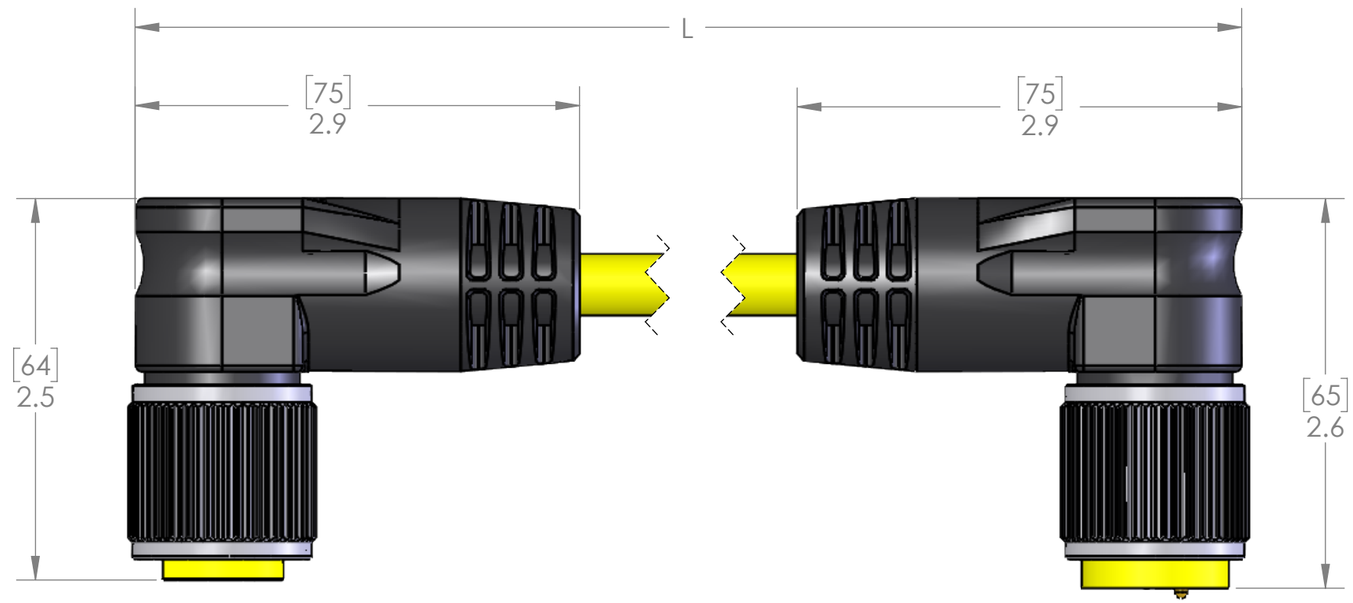

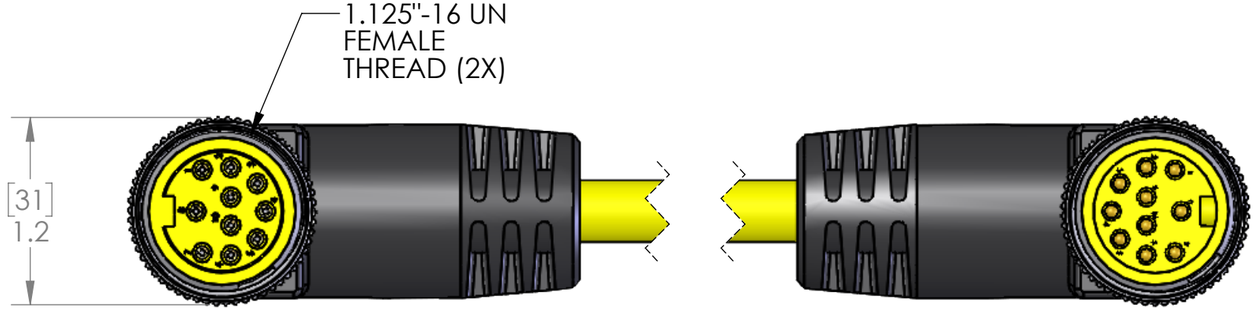

TABLE A		
P/N	L	STD?
MIN-10MFPX-3-R	36" [0.9m]	YES
MIN-10MFPX-6-R	72" [1.8m]	YES
MIN-10MFPX-12-R	144" [3.6m]	YES
MIN-10MFPX-20-R	240" [6.1m]	YES
MIN-10MFPX-30-R	360" [9.1m]	YES
MIN-10MFPX-40-R	480" [12.2m]	NO
MIN-10MFPX-50-R	600" [15.2m]	YES
MIN-10MFPX-60-R	720" [18.3m]	NO
MIN-10MFPX-100-R	1200" [30.5m]	NO

PARTS LISTED AS NOT BEING STANDARD
MAY HAVE MINIMUM ORDER QUANTITIES

MATERIALS	
BODY:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	18/10 YELLOW PVC JACKET
COUPLING:	NICKEL PLATED BRASS

APPROVALS:	
US:	UL LISTED
CANADA:	C-UL LISTED
RoHS:	YES
CE:	YES

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES AND [MM]

MATERIAL

FINISH

DO NOT SCALE DRAWING

DRAWN BY	ADM
DRAWN DATE	02/09/2021
CHECKED BY	JJH
CHECK DATE	02/10/2021

COMMENTS:

MENCOM CORPORATION

TITLE:

SIZE B | DWG. NO. MIN-10MFPX-ZZ-R | REV C

SCALE: 1.5:1 | WEIGHT: | SHEET 1 OF 1