
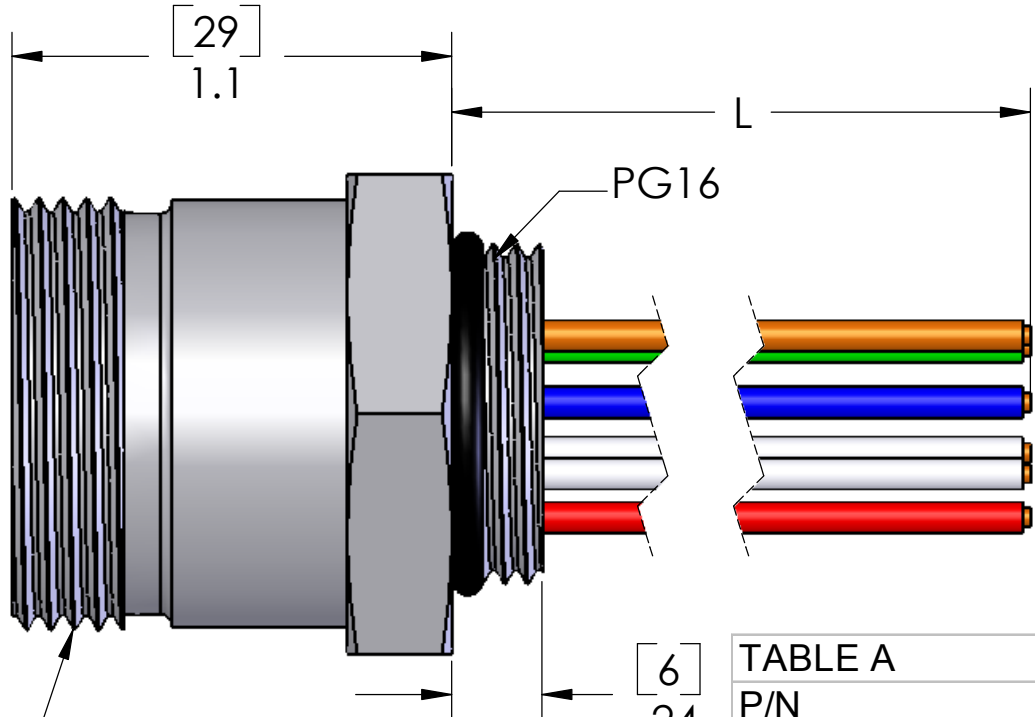


PIN #	COLOR
1	ORANGE
2	BLUE
3	WHITE w/BLACK
4	RED w/BLACK
5	GREEN w/BLACK
6	ORANGE w/BLACK
7	BLUE w/BLACK
8	BLACK w/WHITE
9	GREEN / YELLOW
10	RED
11	WHITE
12	BLACK

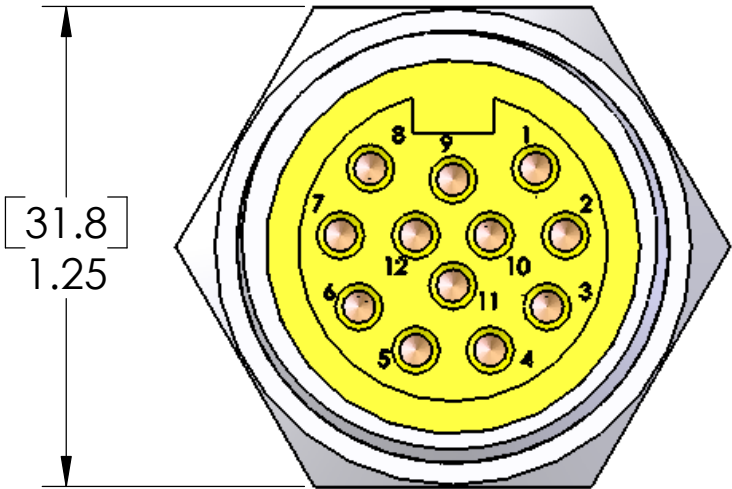

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	6/23/2005	

MATERIALS	
BODY:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRE:	18AWG UL1007
INSERT:	YELLOW PVC
O-RING:	BUNA-N

TABLE A		
P/N	L	STD?
MIN-12FR-5-18-PG16	6"	NO
MIN-12FR-1-18-PG16	12"	YES
MIN-12FR-2-18-PG16	24"	NO
MIN-12FR-3-18-PG16	36"	YES
MIN-12FR-4-18-PG16	48"	NO
MIN-12FR-6-18-PG16	72"	YES
MIN-12FR-10-18-PG16	120"	NO
MIN-12FR-15-18-PG16	180"	NO
MIN-12FR-20-18-PG16	240"	NO

PARTS LISTED AS NOT BEING STANDARD MAY HAVE MINIMUM ORDER QUANTITIES

APPROVALS	
U.S.	UL RECOGNIZED
CANADA	C-UL RECOGNIZED

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP	105°C
SPECIFICATIONS	

UNLESS OTHERWISE SPECIFIED:		NAME
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	BEM
	CHECKED	
	ENG APPR.	
	MFG APPR.	
	Q.A.	
MATERIAL	COMMENTS:	
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION		
TITLE:		
SIZE	DWG. NO.	REV
B	MIN-12FR-ZZ-18-PG16	A
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1