


PIN #	COLOR
1	ORANGE
2	BLUE
3	WHITE w/BLACK
4	RED w/BLACK
5	GREEN w/BLACK
6	ORANGE w/BLACK
7	BLUE w/BLACK
8	BLACK w/WHITE
9	GREEN / YELLOW
10	RED
11	WHITE
12	BLACK


MATERIALS	
BODY:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
INSERT:	YELLOW PVC
WIRE:	18AWG UL1007

APPROVALS	
U.S.	UL RECOGNIZED
CANADA	C-UL RECOGNIZED

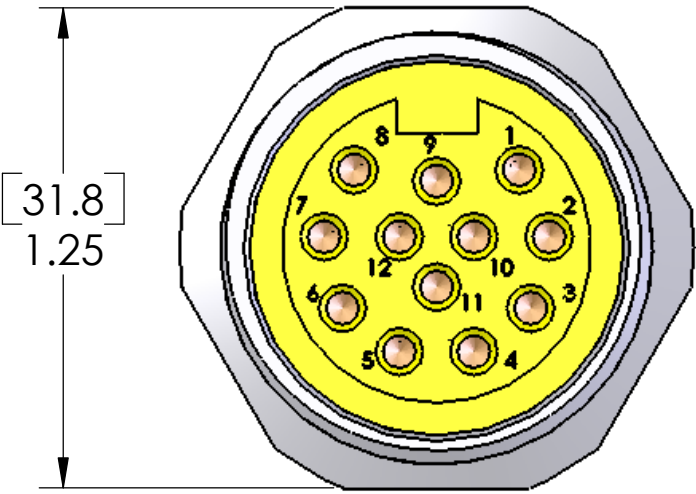

1.125"-16 UN

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	8/3/2005	

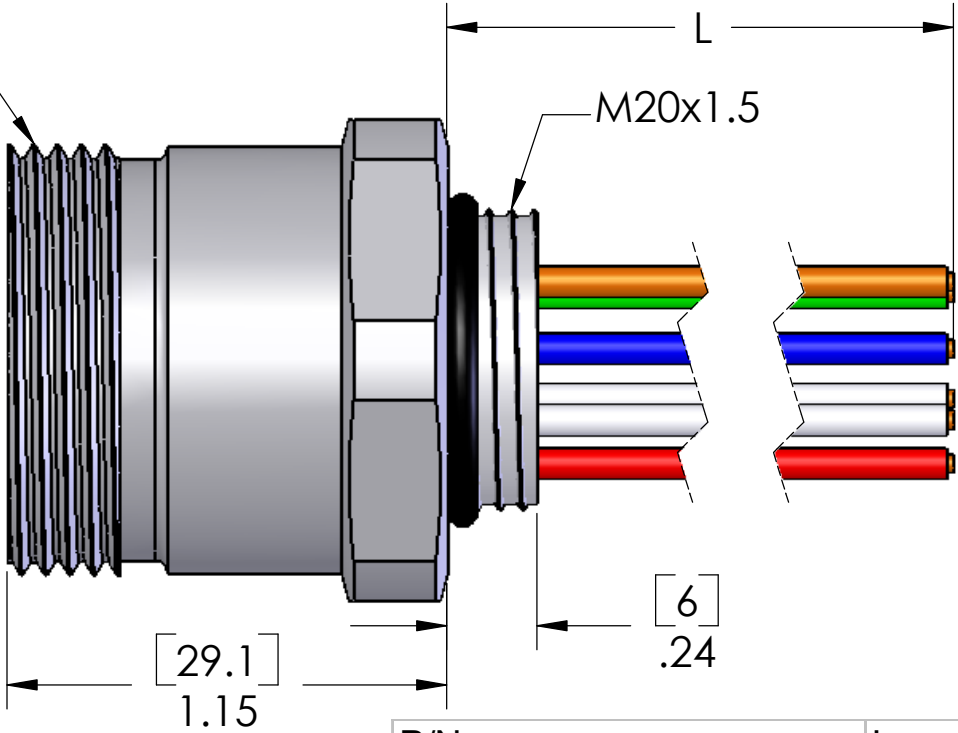

P/N	L	STD?
MIN-12FR-.5-18-M20	6"	NO
MIN-12FR-1-18-M20	12"	YES
MIN-12FR-2-18-M20	24"	NO
MIN-12FR-3-18-M20	36"	YES
MIN-12FR-4-18-M20	48"	NO
MIN-12FR-5-18-M20	60"	NO
MIN-12FR-6-18-M20	72"	YES
MIN-12FR-10-18-M20	120"	NO
MIN-12FR-15-18-M20	180"	NO
MIN-12FR-20-18-M20	240"	NO

PARTS LISTED AS NOT BEING STANDARD
MAY REQUIRE MINIMUM ORDERS

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP	105°C

SPECIFICATIONS

UNLESS OTHERWISE SPECIFIED:		NAME
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	DWM
	CHECKED	
	ENG APPR.	
	MFG APPR.	
	Q.A.	
MATERIAL	COMMENTS:	
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION		
TITLE:		
SIZE	DWG. NO.	REV
B	MIN-12FR-ZZ-18-M20	A
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1