



PIN #	COLOR
1	ORANGE
2	BLUE
3	WHITE w/BLACK
4	RED w/BLACK
5	GREEN w/BLACK
6	ORANGE w/BLACK
7	BLUE w/BLACK
8	BLACK w/WHITE
9	GREEN / YELLOW
10	RED
11	WHITE
12	BLACK

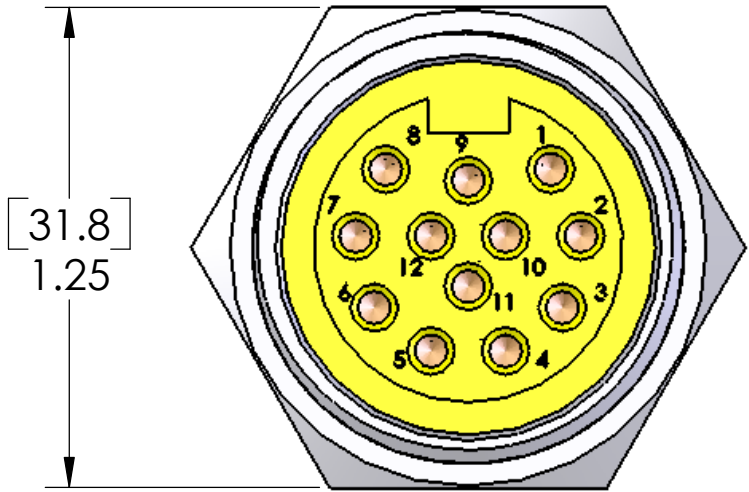

1.125"-16 UN

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	8/3/2005	

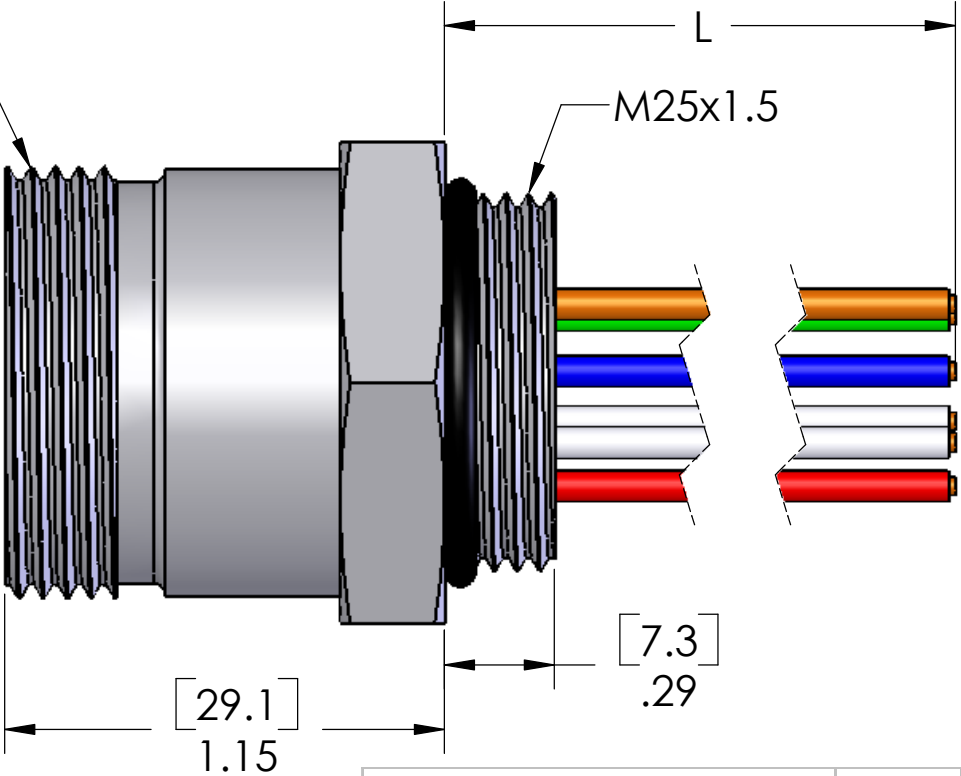

P/N	L	STD?
MIN-12FR-.5-18-M25	6"	NO
MIN-12FR-1-18-M25	12"	YES
MIN-12FR-2-18-M25	24"	NO
MIN-12FR-3-18-M25	36"	YES
MIN-12FR-4-18-M25	48"	NO
MIN-12FR-5-18-M25	60"	NO
MIN-12FR-6-18-M25	72"	YES
MIN-12FR-10-18-M25	120"	NO
MIN-12FR-15-18-M25	180"	NO
MIN-12FR-20-18-M25	240"	NO

MATERIALS	
BODY:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
INSERT:	YELLOW PVC
WIRE:	18AWG UL1007

APPROVALS	
U.S.	UL RECOGNIZED
CANADA	C-UL RECOGNIZED

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP	105°C

SPECIFICATIONS

UNLESS OTHERWISE SPECIFIED:	NAME
DIMENSIONS ARE IN INCHES AND [MM]	DWM
MATERIAL	COMMENTS:
FINISH	
DO NOT SCALE DRAWING	

MENCOM CORPORATION		
TITLE:		
SIZE	DWG. NO.	REV
B	MIN-12FR-ZZ-18-M25	A
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1

PARTS LISTED AS NOT BEING STANDARD
MAY REQUIRE MINIMUM ORDERS