


PIN #	COLOR
1	ORANGE
2	BLUE
3	WHITE w/BLACK
4	RED w/BLACK
5	GREEN w/BLACK
6	ORANGE w/BLACK
7	BLUE w/BLACK
8	BLACK w/WHITE
9	GREEN / YELLOW
10	RED
11	WHITE
12	BLACK

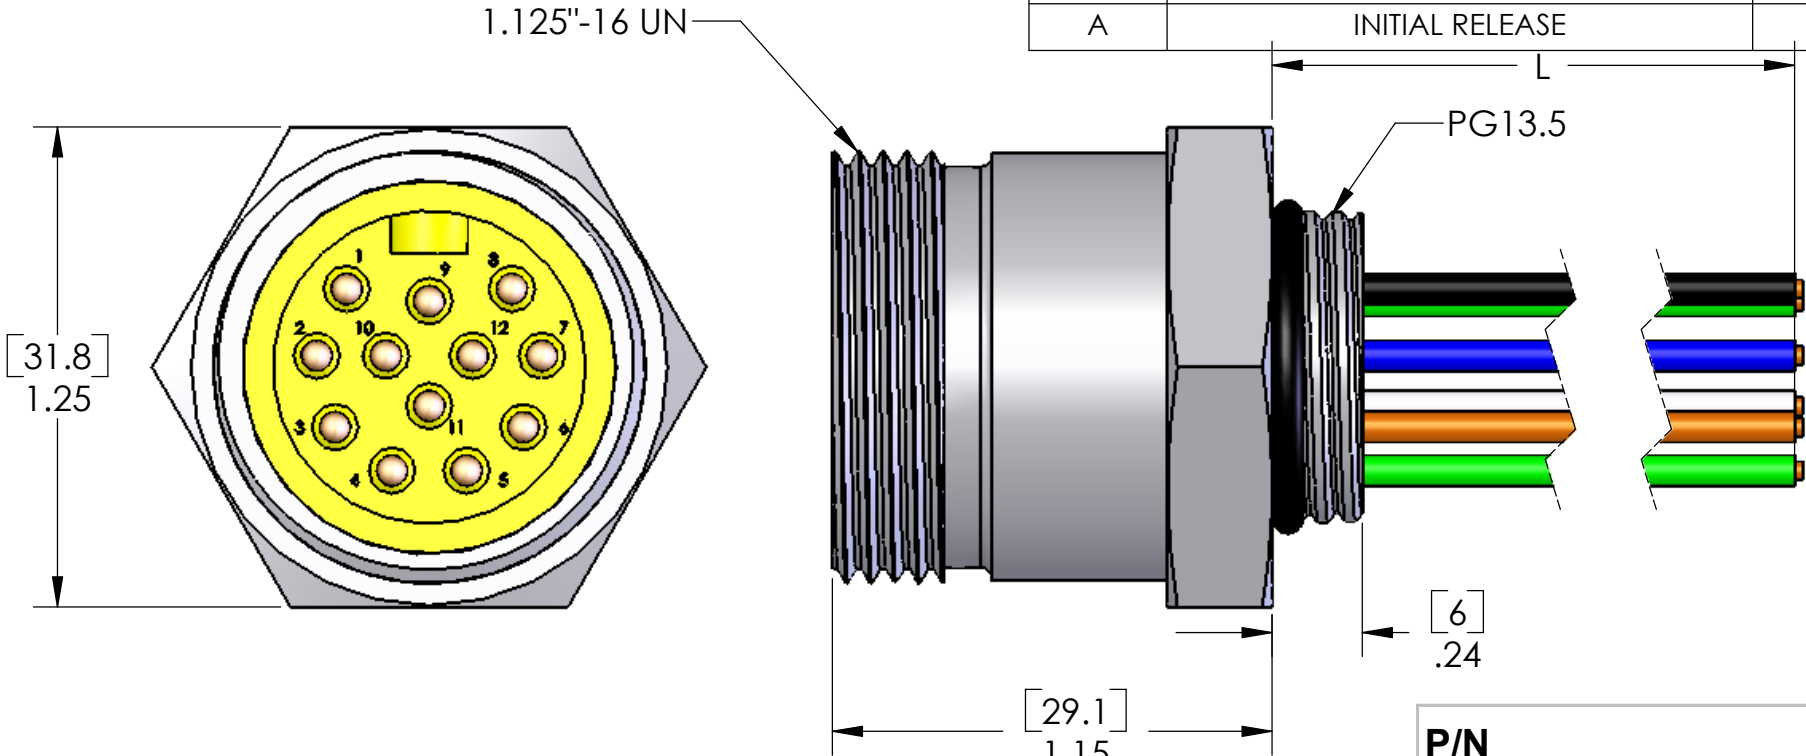

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	8/3/2005	

P/N	L	STD?
MIN-12MR-.5-18-PG13.5	6"	NO
MIN-12MR-1-18-PG13.5	12"	YES
MIN-12MR-2-18-PG13.5	24"	NO
MIN-12MR-3-18-PG13.5	36"	YES
MIN-12MR-4-18-PG13.5	48"	NO
MIN-12MR-5-18-PG13.5	60"	NO
MIN-12MR-6-18-PG13.5	72"	YES
MIN-12MR-10-18-PG13.5	120"	NO
MIN-12MR-15-18-PG13.5	180"	NO
MIN-12MR-20-18-PG13.5	240"	NO

PARTS LISTED AS NOT BEING STANDARD
MAY REQUIRE MINIMUM ORDERS

MATERIALS	
BODY:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
INSERT:	YELLOW PVC
WIRE:	18AWG UL1007

APPROVALS	
U.S.	UL RECOGNIZED
CANADA	C-UL RECOGNIZED

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP	105°C

SPECIFICATIONSDO NOT SCALE DRAWING

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]		NAME	MENCOM CORPORATION	
	DRAWN	DWM	TITLE:	
	CHECKED			
	ENG APPR.			
	MFG APPR.			
MATERIAL	Q.A.		REV	
	COMMENTS:			
FINISH			SIZE B	DWG. NO. MIN-12MR-ZZ-18-PG13.5
			SCALE: 2:1	WEIGHT:
			SHEET 1 OF 1	