

PIN #	COLOR
1	ORANGE
2	BLUE
3	WHITE w/BLACK
4	RED w/BLACK
5	GREEN w/BLACK
6	ORANGE w/BLACK
7	BLUE w/BLACK
8	BLACK w/WHITE
9	GREEN / YELLOW
10	RED
11	WHITE
12	BLACK


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	8/1/2005	

P/N	L	STD?
MIN-12MR-.5-22-M20	6"	NO
MIN-12MR-1-22-M20	12"	YES
MIN-12MR-2-22-M20	24"	NO
MIN-12MR-3-22-M20	36"	YES
MIN-12MR-4-22-M20	48"	NO
MIN-12MR-5-22-M20	60"	NO
MIN-12MR-6-22-M20	72"	YES
MIN-12MR-10-22-M20	120"	NO
MIN-12MR-15-22-M20	180"	NO
MIN-12MR-20-22-M20	240"	NO

PARTS LISTED AS NOT BEING STANDARD
MAY HAVE MINIMUM ORDER QUANTITIES

MATERIALS:	
BODY:	CLEAR ANODIZED ALUMINUM
INSERT:	YELLOW PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRE:	22AWG UL1007
O-RING:	BUNA-N

APPROVALS:	
US	UL RECOGNIZED
CANADA	C-UL RECOGNIZED

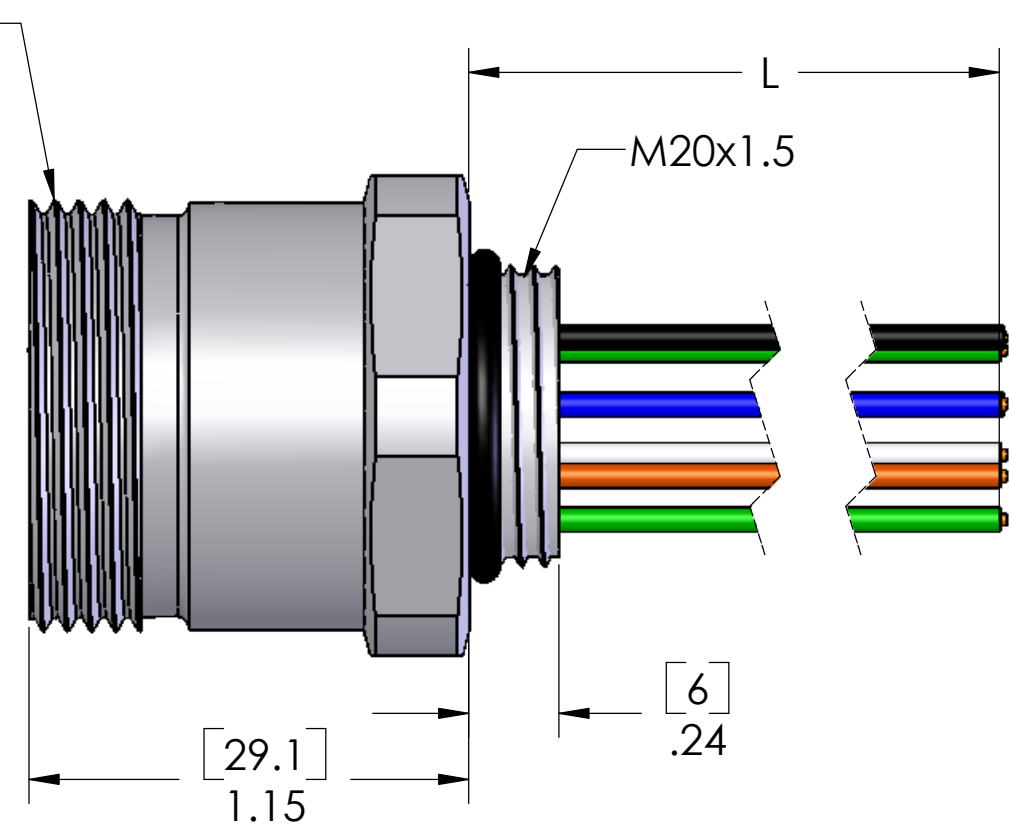

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP	105°C

SPECIFICATIONS

UNLESS OTHERWISE SPECIFIED:			NAME
DIMENSIONS ARE IN INCHES AND [MM]		DRAWN	DWM
		CHECKED	
		ENG APPR.	
		MFG APPR.	
		Q.A.	
MATERIAL	COMMENTS:		
FINISH			
DO NOT SCALE DRAWING			

MENCOM CORPORATION		
TITLE:		
SIZE	DWG. NO.	REV
B	MIN-12MR-ZZ-22-M20	A
SCALE: 2:1		SHEET 1 OF 1