

PIN #	COLOR
1	ORANGE
2	BLUE
3	WHITE w/BLACK
4	RED w/BLACK
5	GREEN w/BLACK
6	ORANGE w/BLACK
7	BLUE w/BLACK
8	BLACK w/WHITE
9	GREEN / YELLOW
10	RED
11	WHITE
12	BLACK

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	8/1/2005	

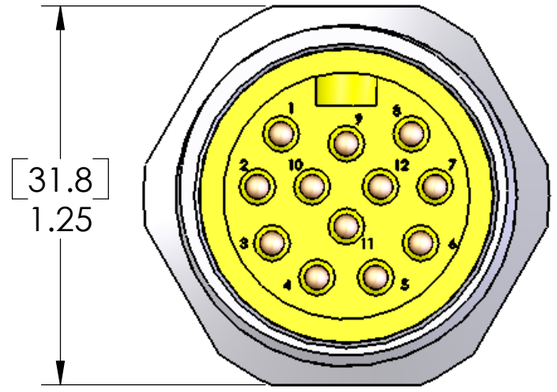

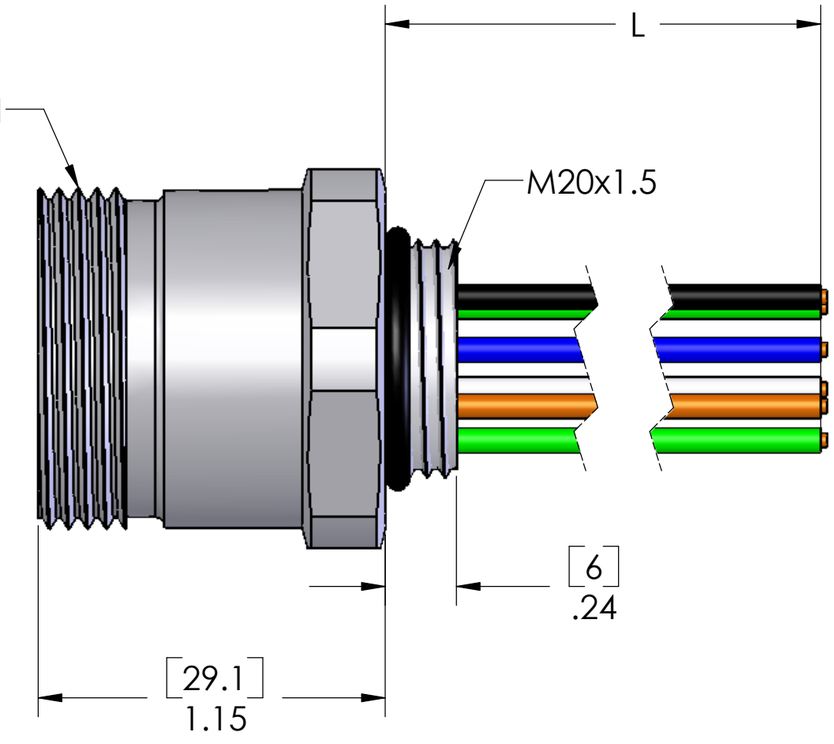

P/N	L	STD?
MIN-12MR-.5-18-M20	6"	NO
MIN-12MR-1-18-M20	12"	YES
MIN-12MR-2-18-M20	24"	NO
MIN-12MR-3-18-M20	36"	YES
MIN-12MR-4-18-M20	48"	NO
MIN-12MR-5-18-M20	60"	NO
MIN-12MR-6-18-M20	72"	YES
MIN-12MR-10-18-M20	120"	NO
MIN-12MR-15-18-M20	180"	NO
MIN-12MR-20-18-M20	240"	NO

PARTS LISTED AS NOT BEING STANDARD
MAY HAVE MINIMUM ORDER QUANTITIES

MATERIALS:	
BODY:	CLEAR ANODIZED ALUMINUM
INSERT:	YELLOW PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRE:	18AWG UL1007
O-RING:	BUNA-N

APPROVALS:	
US	UL RECOGNIZED
CANADA	C-UL RECOGNIZED

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP	105°C
SPECIFICATIONS	

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]
MATERIAL
FINISH
DO NOT SCALE DRAWING

	NAME
DRAWN	DWM
CHECKED	
ENG APPR.	
MFG APPR.	
Q.A.	
COMMENTS:	

MENCOM CORPORATION

TITLE:

SIZE	DWG. NO.	REV
B	MIN-12MR-ZZ-18-M20	A
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1