
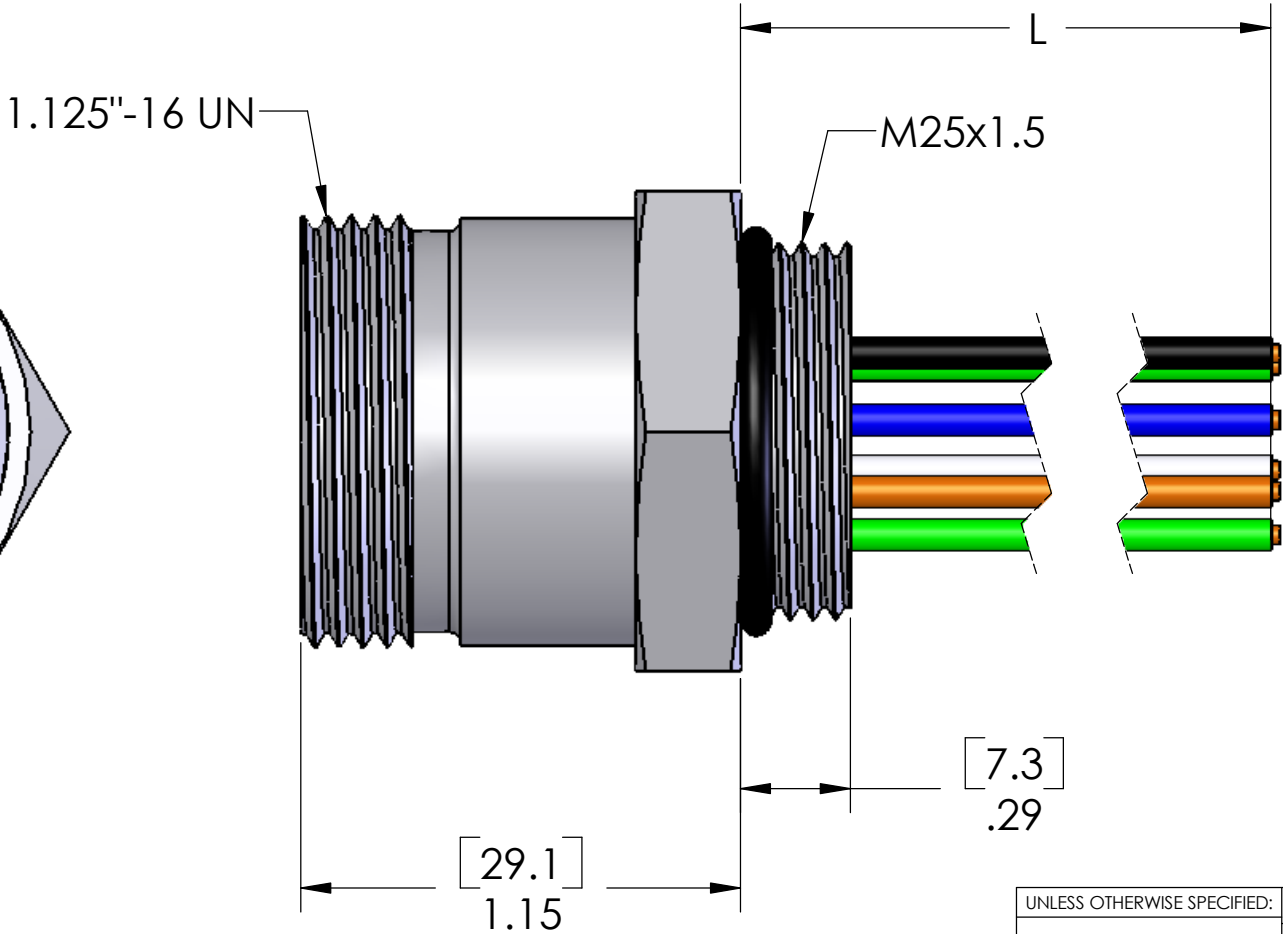


PIN #	COLOR
1	ORANGE
2	BLUE
3	WHITE w/BLACK
4	RED w/BLACK
5	GREEN w/BLACK
6	ORANGE w/BLACK
7	BLUE w/BLACK
8	BLACK w/WHITE
9	GREEN / YELLOW
10	RED
11	WHITE
12	BLACK

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	8/1/2005	

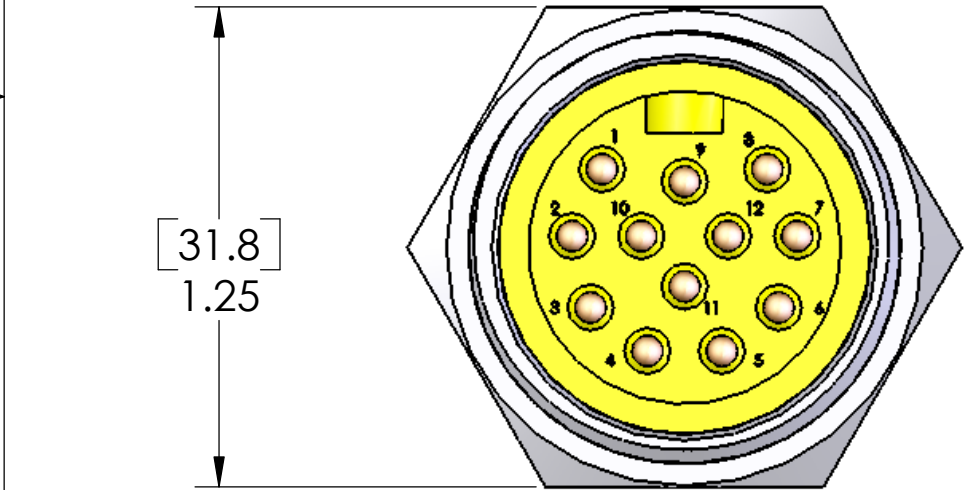

P/N	L	STD?
MIN-12MR-.5-18-M25	6"	NO
MIN-12MR-1-18-M25	12"	YES
MIN-12MR-2-18-M25	24"	NO
MIN-12MR-3-18-M25	36"	YES
MIN-12MR-4-18-M25	48"	NO
MIN-12MR-5-18-M25	60"	NO
MIN-12MR-6-18-M25	72"	YES
MIN-12MR-10-18-M25	120"	NO
MIN-12MR-15-18-M25	180"	NO
MIN-12MR-20-18-M25	240"	NO

PARTS LISTED AS NOT BEING STANDARD
MAY HAVE MINIMUM ORDER QUANTITIES

MATERIALS:	
BODY:	CLEAR ANODIZED ALUMINUM
INSERT:	YELLOW PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRE:	18AWG UL1007
O-RING:	BUNA-N

APPROVALS:	
US	UL RECOGNIZED
CANADA	C-UL RECOGNIZED

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP	105°C

SPECIFICATIONS

UNLESS OTHERWISE SPECIFIED:	
DIMENSIONS ARE IN INCHES AND [MM]	
MATERIAL	
FINISH	
DO NOT SCALE DRAWING	

NAME	DWM	MENCOM CORPORATION	
DRAWN		TITLE:	
CHECKED			
ENG APPR.			
MFG APPR.			
Q.A.			
COMMENTS:			
SIZE	DWG. NO.	REV	
B	MIN-12MR-ZZ-18-M25	A	
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1	