

PIN #	WIRING	PIN #
1	-----	1
2	-----	2
3	-----	3
4	-----	4
5	-----	5
	ETC.	
12	-----	12

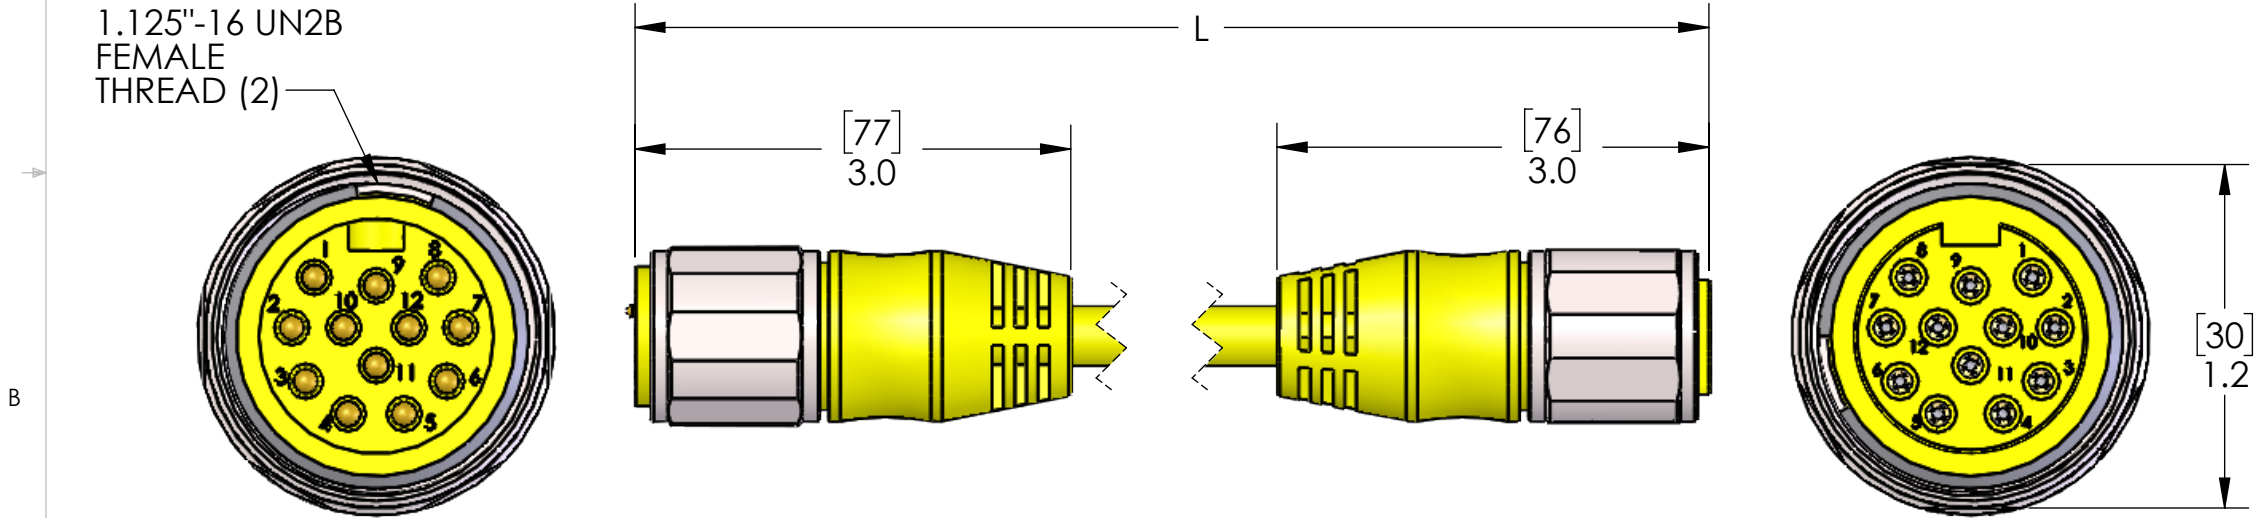


TABLE A		
P/N	L	STD?
MIN-12MFPX-3	36" [0.9m]	YES
MIN-12MFPX-6	72" [1.8m]	YES
MIN-12MFPX-12	144" [3.6m]	YES
MIN-12MFPX-20	240" [6.1m]	YES
MIN-12MFPX-30	360" [9.1m]	YES
MIN-12MFPX-40	480" [12.2m]	NO
MIN-12MFPX-50	600" [15.2m]	YES
MIN-12MFPX-60	720" [18.3m]	NO
MIN-12MFPX-100	1200" [30.5m]	NO

MATERIALS	
BODY:	YELLOW PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	18/12 AMW STYLE YELLOW PVC JKT
COUPLING:	STAINLESS STEEL
APPROVALS:	
US	UL LISTED
CANADA	C-UL LISTED

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:	DRAWN BY	ADM
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN DATE	01/04/2019
	CHECKED BY	ADM
	CHECK DATE	01/04/2019
	COMMENTS:	
MATERIAL		
FINISH		
DO NOT SCALE DRAWING		

PARTS LISTED AS NOT BEING STANDARD MAY HAVE MINIMUM ORDER QUANTITIES			
MENCOM CORPORATION			
TITLE:			
SIZE	DWG. NO.		REV
B	MIN-12MFPX-ZZ-SS		B
SCALE: 0.75:1	WEIGHT:		SHEET 1 OF 1