


PIN #	COLOR
1	WHITE
2	BLACK

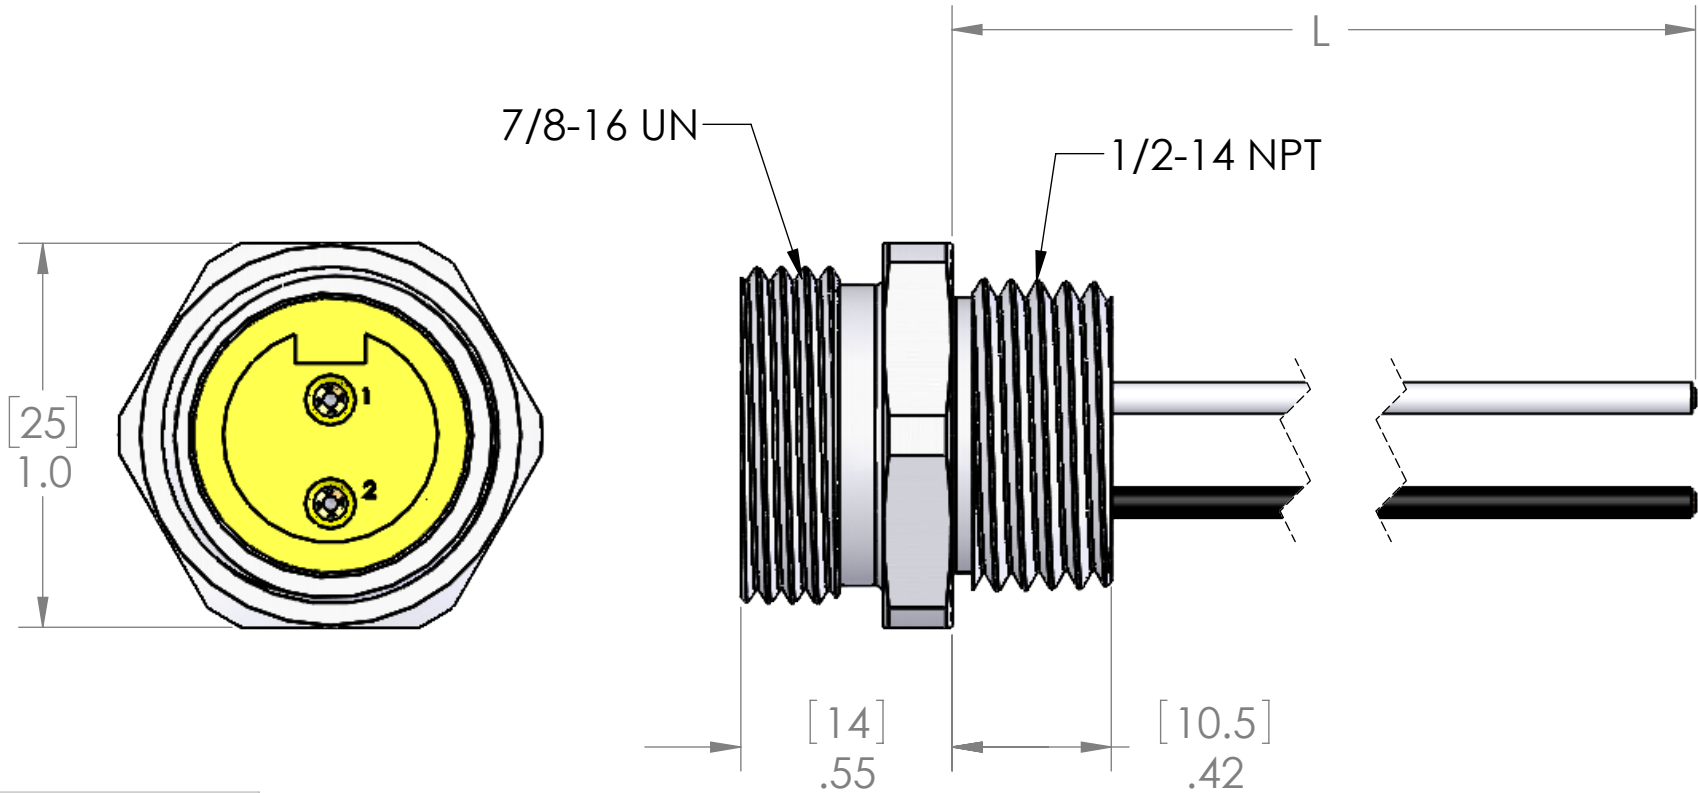

AN O-RING AND LOCKNUT ARE INCLUDED
ON LENGTHS OF 24" [0.6M] AND LONGER.

MATERIALS	
SHELL:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRES:	
STYLE:	UL 1007/1569
AWG:	18 AWG
JACKET:	YELLOW PVC
VOLTAGE:	300V
INSERT:	YELLOW PVC
O-RING:	NBR
NUT:	ZINC PLATED STEEL
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

P/N	L
MIN-2FR-1-18	12" [0.3m]
MIN-2FR-2-18	24" [0.6m]
MIN-2FR-3-18	36" [0.9m]
MIN-2FR-4-18	48" [1.2m]
MIN-2FR-5-18	60" [1.5m]
MIN-2FR-6-18	72" 1.8m]
MIN-2FR-10-18	120" [3m]

OTHER LENGTHS ARE AVAILABLE
PLEASE CONSULT FACTORY

UNLESS OTHERWISE SPECIFIED:		DRAWN BY	ADM	MENCOM CORPORATION	
DIMENSIONS ARE IN INCHES AND [MM]		DRAWN DATE	09/05/2023		
		CHECKED BY	JJH		
		CHECK DATE	09/06/2023		
				TITLE:	
				2 PL MIN FEM RECP	
		COMMENTS:		SIZE	DWG. NO.
				B	MIN-2FR-ZZ-18
				SCALE: 2:1	REV
				WEIGHT:	B
				SHEET 1 OF 1	

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	300V
AMPS	10A
TEMP:	105°C

DO NOT SCALE DRAWING