



# 7/8" MIN Series Size I Receptacles

2, 3, 4, 5 & 6 Conductor MIN Series Size I Receptacles, 16/18/22AWG



Back Mount Receptacles | IP69 Rating

A


MIN Series Size I Receptacles




# of Poles	Male Faceview	Color Code	Rating	Wire AWG	Male Receptacles	Female Receptacles	
						Male Threads	Female Threads
2	 7/8"-16UN2	<b>North American</b> 1. White 2. Black	600V 13A	16 AWG	MIN-2MR-1-BM	MIN-2FR-1-BM	MIN-2FRF-1-BM
			300V 10A	18 AWG	MIN-2MR-1-18-BM	MIN-2FR-1-18-BM	MIN-2FRF-1-18-BM
			300V 4A	22 AWG	MIN-2MR-.5-22-BM	MIN-2FR-1-22-BM	MIN-2FRF-1-22-BM
3	 7/8"-16UN2	<b>North American</b> 1. Green/Yellow 2. Black 3. White	600V 13A	16 AWG	MIN-3MR-1-BM	MIN-3FR-1-BM	MIN-3FRF-1-BM
			300V 10A	18 AWG	MIN-3MR-1-18-BM	MIN-3FR-1-18-BM	MIN-3FRF-1-18-BM
			300V 4A	22 AWG	MIN-3MR-.5-22-BM	MIN-3FR-1-22-BM	MIN-3FRF-1-22-BM
4	 7/8"-16UN2	<b>North American</b> 1. Black 2. White 3. Red 4. Green/Yellow	600V 10A	16 AWG	MIN-4MR-1-BM	MIN-4FR-1-BM	MIN-4FRF-1-BM
			300V 5.5A	18 AWG	MIN-4MR-1-18-BM	MIN-4FR-1-18-BM	MIN-4FRF-1-18-BM
			300V 4A	22 AWG	MIN-4MR-.5-22-BM	MIN-4FR-1-22-BM	MIN-4FRF-1-22-BM
5	 7/8"-16UN2	<b>North American</b> 1. Red/White 2. Red 3. Green/Yellow 4. Orange 5. Black	600V 8A	16 AWG	MIN-5MR-1-BM	MIN-5FR-1-BM	MIN-5FRF-1-BM
			300V 5.5A	18 AWG	MIN-5MR-1-18-BM	MIN-5FR-1-18-BM	MIN-5FRF-1-18-BM
			300V 4A	22 AWG	MIN-5MR-.5-22-BM	MIN-5FR-1-22-BM	MIN-5FRF-1-22-BM
6	 7/8"-16UN2	<b>North American</b> 1. White 2. Red 3. Green/Yellow 4. Orange 5. Black 6. Blue	600V 8A	16 AWG	MIN-6MR-1-BM	MIN-6FR-1-BM	MIN-6FRF-1-BM
			300V 5.5A	18 AWG	MIN-6MR-1-18-BM	MIN-6FR-1-18-BM	MIN-6FRF-1-18-BM
			300V 4A	22 AWG	MIN-6MR-.5-22-BM	MIN-6FR-1-22-BM	MIN-6FRF-1-22-BM

12" leads are standard. Longer lead lengths are available, please consult the factory for part numbers.


Standard shell is nickel plated brass, for stainless steel shell add a "-SS" suffix. (e.g. MIN-3FR-1-18-BM becomes MIN-3FR-1-18-BM-SS)

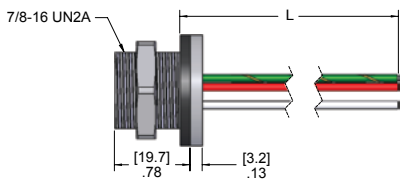

**Male & Female Receptacle (Male Threads)**

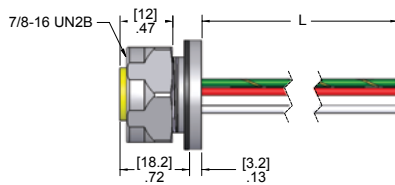

**Female Receptacle (Female Threads)**



**Specifications:**

Shell:	Nickel Plated Brass	Contacts:	Copper Alloy with Gold Plating
Insulator:	105°C, Oil Resistant Yellow PVC	Jam Nut:	Nickel Plated Brass
Wire:	16 AWG; UL Style 1015, 600 V	Gasket:	NBR
	18 & 22 AWG: UL Style 1007/1569, 300V	Temperature:	-40°C to 105°C (-40°F to +221°F)