

PIN #	COLOR
1	WHITE
2	BLACK



REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	7/29/2005	

D

C

B

A

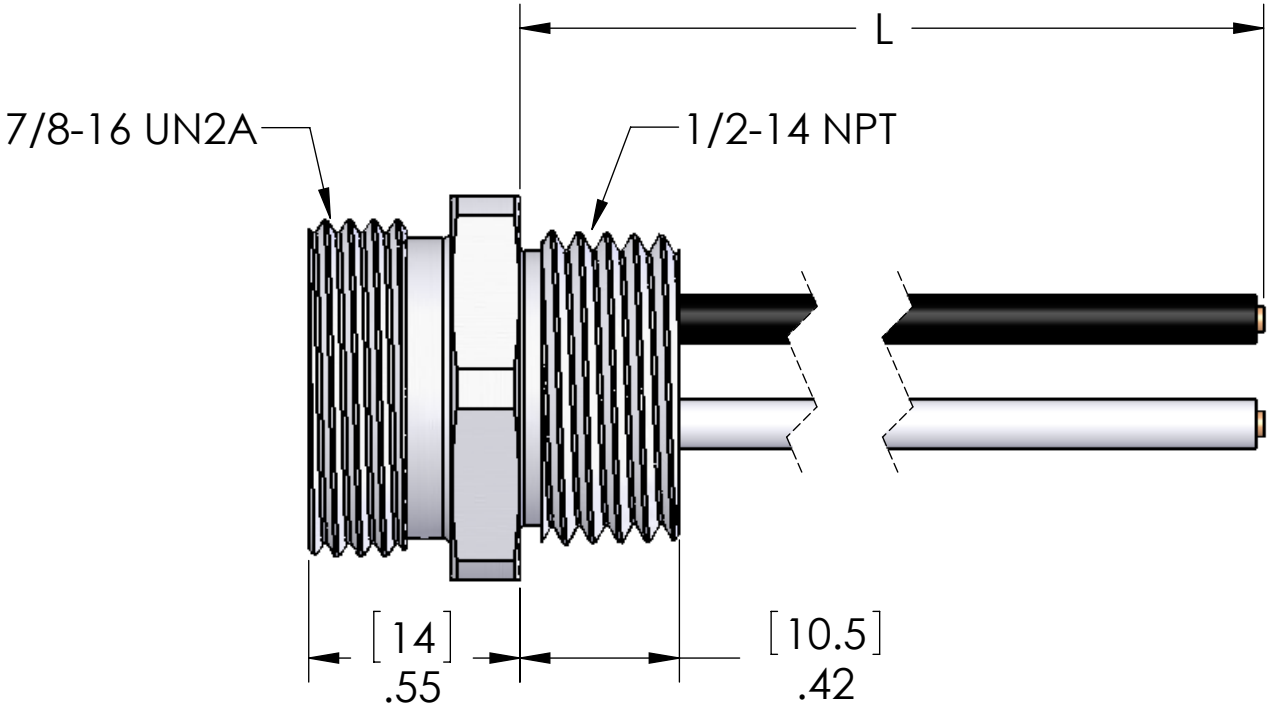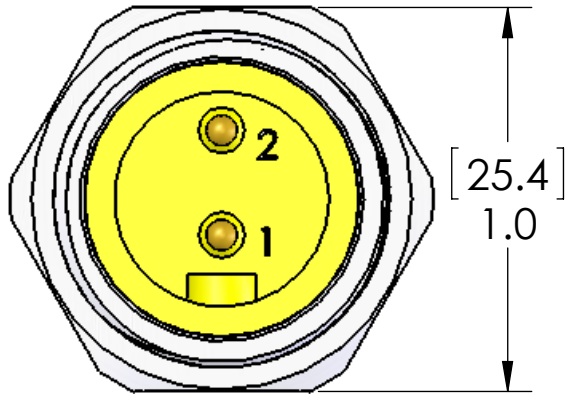

D

C

B

A

FOR LENGTHS OF 24" AND LONGER,
AN O-RING AND LOCKNUT ARE INCLUDED

MATERIALS	
BODY:	CLEAR ANODIZED ALUMINUM
INSERT:	PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRES:	UL1015 16AWG
LOCKNUT:	ZINC PLATED STEEL
O-RING:	NBR

APPROVALS:	
US	UL LISTED
CANADA	C-UL LISTED

TABLE A	
P/N	L
MIN-2MR-1	12" [0.3M]
MIN-2MR-2	24" [0.6M]
MIN-2MR-3	36" [0.9M]
MIN-2MR-4	48" [1.2M]
MIN-2MR-6	72" [1.8M]
MIN-2MR-10	120" [3.1M]
MIN-2MR-15	180" [4.6M]

UNLESS OTHERWISE SPECIFIED:		NAME
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	DWM
	CHECKED	
	ENG APPR.	
	MFG APPR.	
	Q.A.	
	COMMENTS:	
MATERIAL		
FINISH		
DO NOT SCALE DRAWING		

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	600V
AMPS	13A
TEMP	105°C
SPECIFICATIONS	

MENCOM CORPORATION

TITLE:		
SIZE	DWG. NO.	REV
B	MIN-2MR-ZZ	A
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1

8

7

6

5

4

3

2

1