


PIN #	COLOR	PIN #	COLOR
1	VIOLET	11	BLACK
2	RED	12	GRN / YEL
3	GRAY	13	YELLOW w/BRWN
4	RED w/BLUE	14	BROWN w/GRN
5	BLUE	15	WHITE
6	GREEN	16	YELLOW
7	BROWN	17	PINK
8	WHITE w/GRN	18	GRAY w/BRWN
9	WHITE w/YEL	19	GRAY w/PINK
10	WHITE w/GRY		

PINS 5, 7 & 12 ARE 18AWG

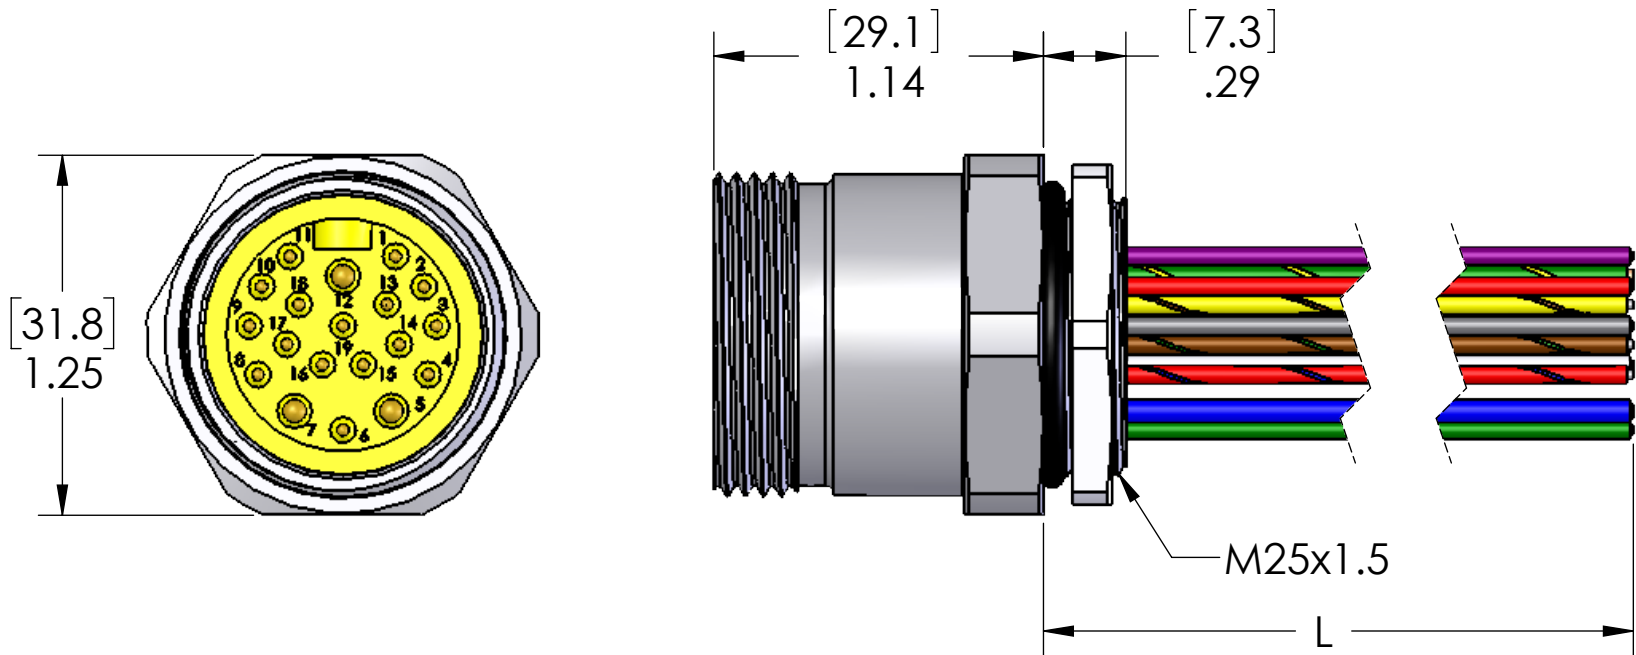

MATERIALS	
BODY:	CLEAR ANODIZED ALUMINUM
INSERT:	YELLOW PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	18AWG & 22AWG UL1007/1569
O-RING:	NBR
LOCK-NUT:	ZINC PLATED STEEL

Please note that to better serve the varying needs of our customers, these parts have been UL tested for two different amperage ratings as shown by our Ratings table.

RATINGS:	
PIN 12	GROUND
PINS 5 & 7	300V, 6A
ALL OTHERS	300V, 1A
OR	
PIN 12	GROUND
PINS 5 & 7	300V, 4A
ALL OTHERS	300V, 2A

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]	DRAWN BY	ADM
	DRAWN DATE	09/22/2016
	CHECKED BY	
	CHECK DATE	
	COMMENTS:	
MATERIAL		
FINISH		
DO NOT SCALE DRAWING		

P/N	L
MIN-19MR-1-M25	12" [0.3m]
MIN-19MR-2-M25	24" [0.6m]
MIN-19MR-3-M25	36" [0.9m]
MIN-19MR-4-M25	48" [1.2m]
MIN-19MR-6-M25	72" [1.8m]
MIN-19MR-10-M25	120" [3.1m]
MIN-19MR-15-M25	180" [4.6m]
MIN-19MR-20-M25	240" [6.1m]

APPROVALS	
U.S.	UL LISTED
CANADA	C-UL LISTED

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	300V
AMPS	6A/1A OR 4A/2A
TEMP:	105°C

MENCOM CORPORATION		
TITLE: 19 POL MAL RECP w/M25 THREADS		
SIZE B	DWG. NO. MIN-19MR-ZZ-M25	REV A
SCALE: 3:2	WEIGHT:	SHEET 1 OF 1