


WIRING	
1	1
2	2
3	3

2 --- 2

3 --- 3



Top view of the circular device. The device has a yellow center with three small circular features labeled 1, 2, and 3. The outer ring is black. Dimensions are indicated below the device: a diameter of 25.9 mm and a thickness of 1.0 mm.

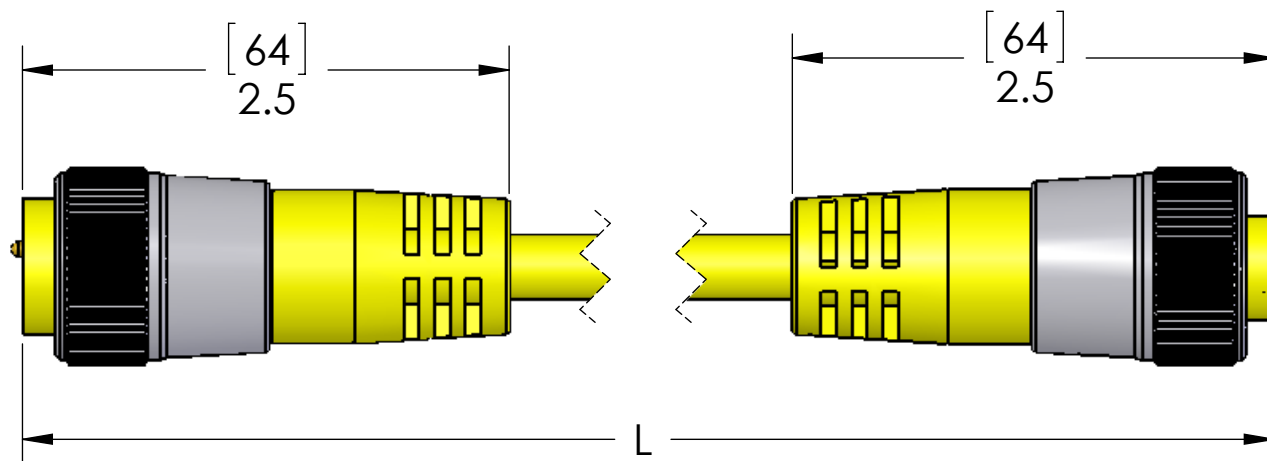

A diagram of a three-pin electrical plug. The plug is circular with a yellow face and a black outer ring. It has three pins: a top pin labeled '1', a bottom-left pin labeled '3', and a bottom-right pin labeled '2'.

P/N	L	STD?
MIN-3MFPX-3	36"	YES
MIN-3MFPX-6	72"	YES
MIN-3MFPX-12	144"	YES
MIN-3MFPX-15	180"	NO
MIN-3MFPX-20	240"	YES
MIN-3MFPX-30	360"	YES
MIN-3MFPX-40	480"	NO
MIN-3MFPX-50	600"	YES
MIN-3MFPX-60	720"	NO
MIN-3MFPX-100	1200"	NO

MATERIALS	
BODY:	YELLOW PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	YELLOW 18/3 SJTOOW
COUPLING:	NICKEL PLATED BRASS

US	UL LISTED
CANADA	C-UL LISTED

CANADA

C-UL LISTED

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCON CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCON CORPORATION IS
PROHIBITED.

VOLTS	300V
AMPS	10A
TEMP	105°C

SPECIFICATIONS

UNLESS OTHERWISE SPECIFIED:	
DIMENSIONS ARE IN INCHES AND [MM]	
MATERIAL	
FINISH	
DO NOT SCALE DRAWING	

NAME
DWM

TITLE:	

MENCOM CORPORATION

TITLE:	3 PL MIN M-F EXT CBL
--------	----------------------

SIZE B	DWG. NO. MIN-3MFPX-ZZ	REV B
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1