

8

7

6

5

4

3

2

1

D



D

C

C

B

B

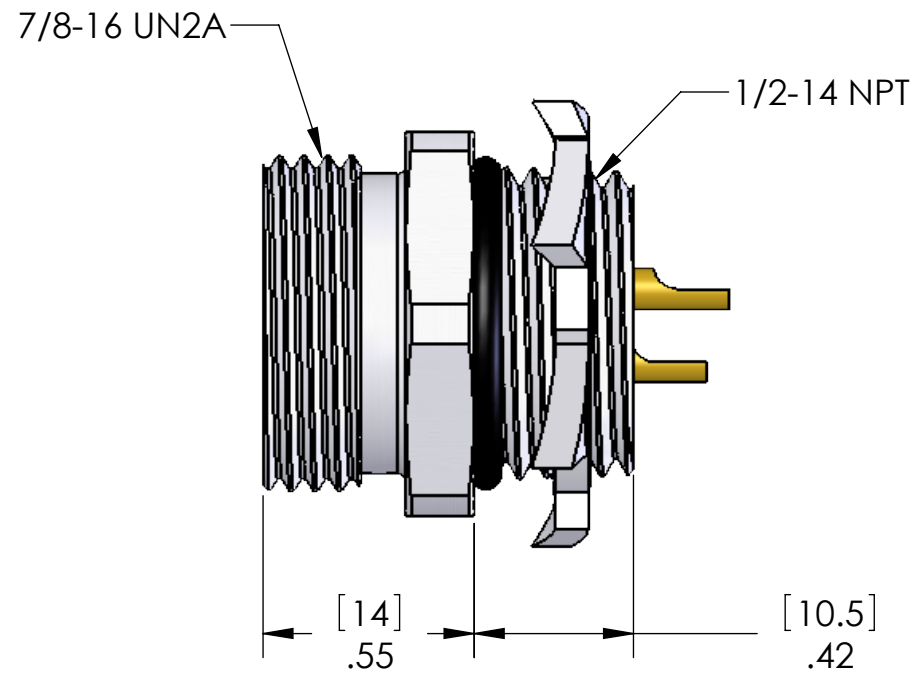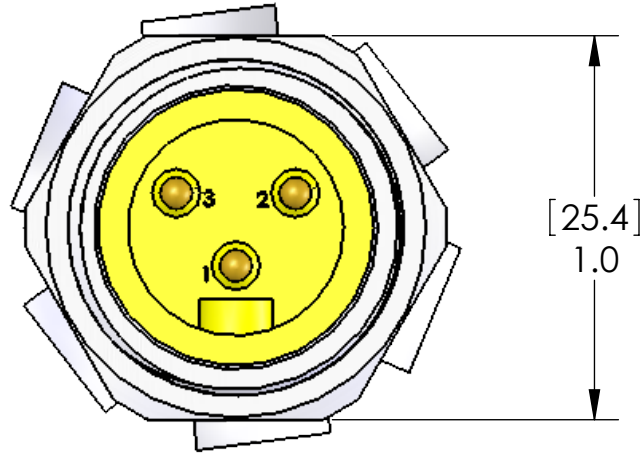

A

A

MATERIALS	
BODY:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
INSERT:	YELLOW PVC
WIRE:	14 AWG MAX
O-RING:	NBR
LOCKNUT:	ZINC PLATED STEEL

AMPERAGE AND VOLTAGE ARE WIRE DEPENDANT. RATINGS LISTED ARE BASED ON 600V, 14AWG WIRE (WITH ONE WIRE BEING A GROUND). SMALLER WIRES AND LOWER VOLTAGE RATINGS WILL LOWER THESE VALUES.

PROPRIETARY AND CONFIDENTIAL	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.	

VOLTS	600V
AMPS	18A MAX
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]	DRAWN BY	ADM
	DRAWN DATE	09/22/2016
	CHECKED BY	
	CHECK DATE	
MATERIAL	COMMENTS:	
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION		
TITLE:		
SIZE	DWG. NO.	REV
B	MIN-3MR-SC	B
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1

8

7

6

5

4

3

2

1