


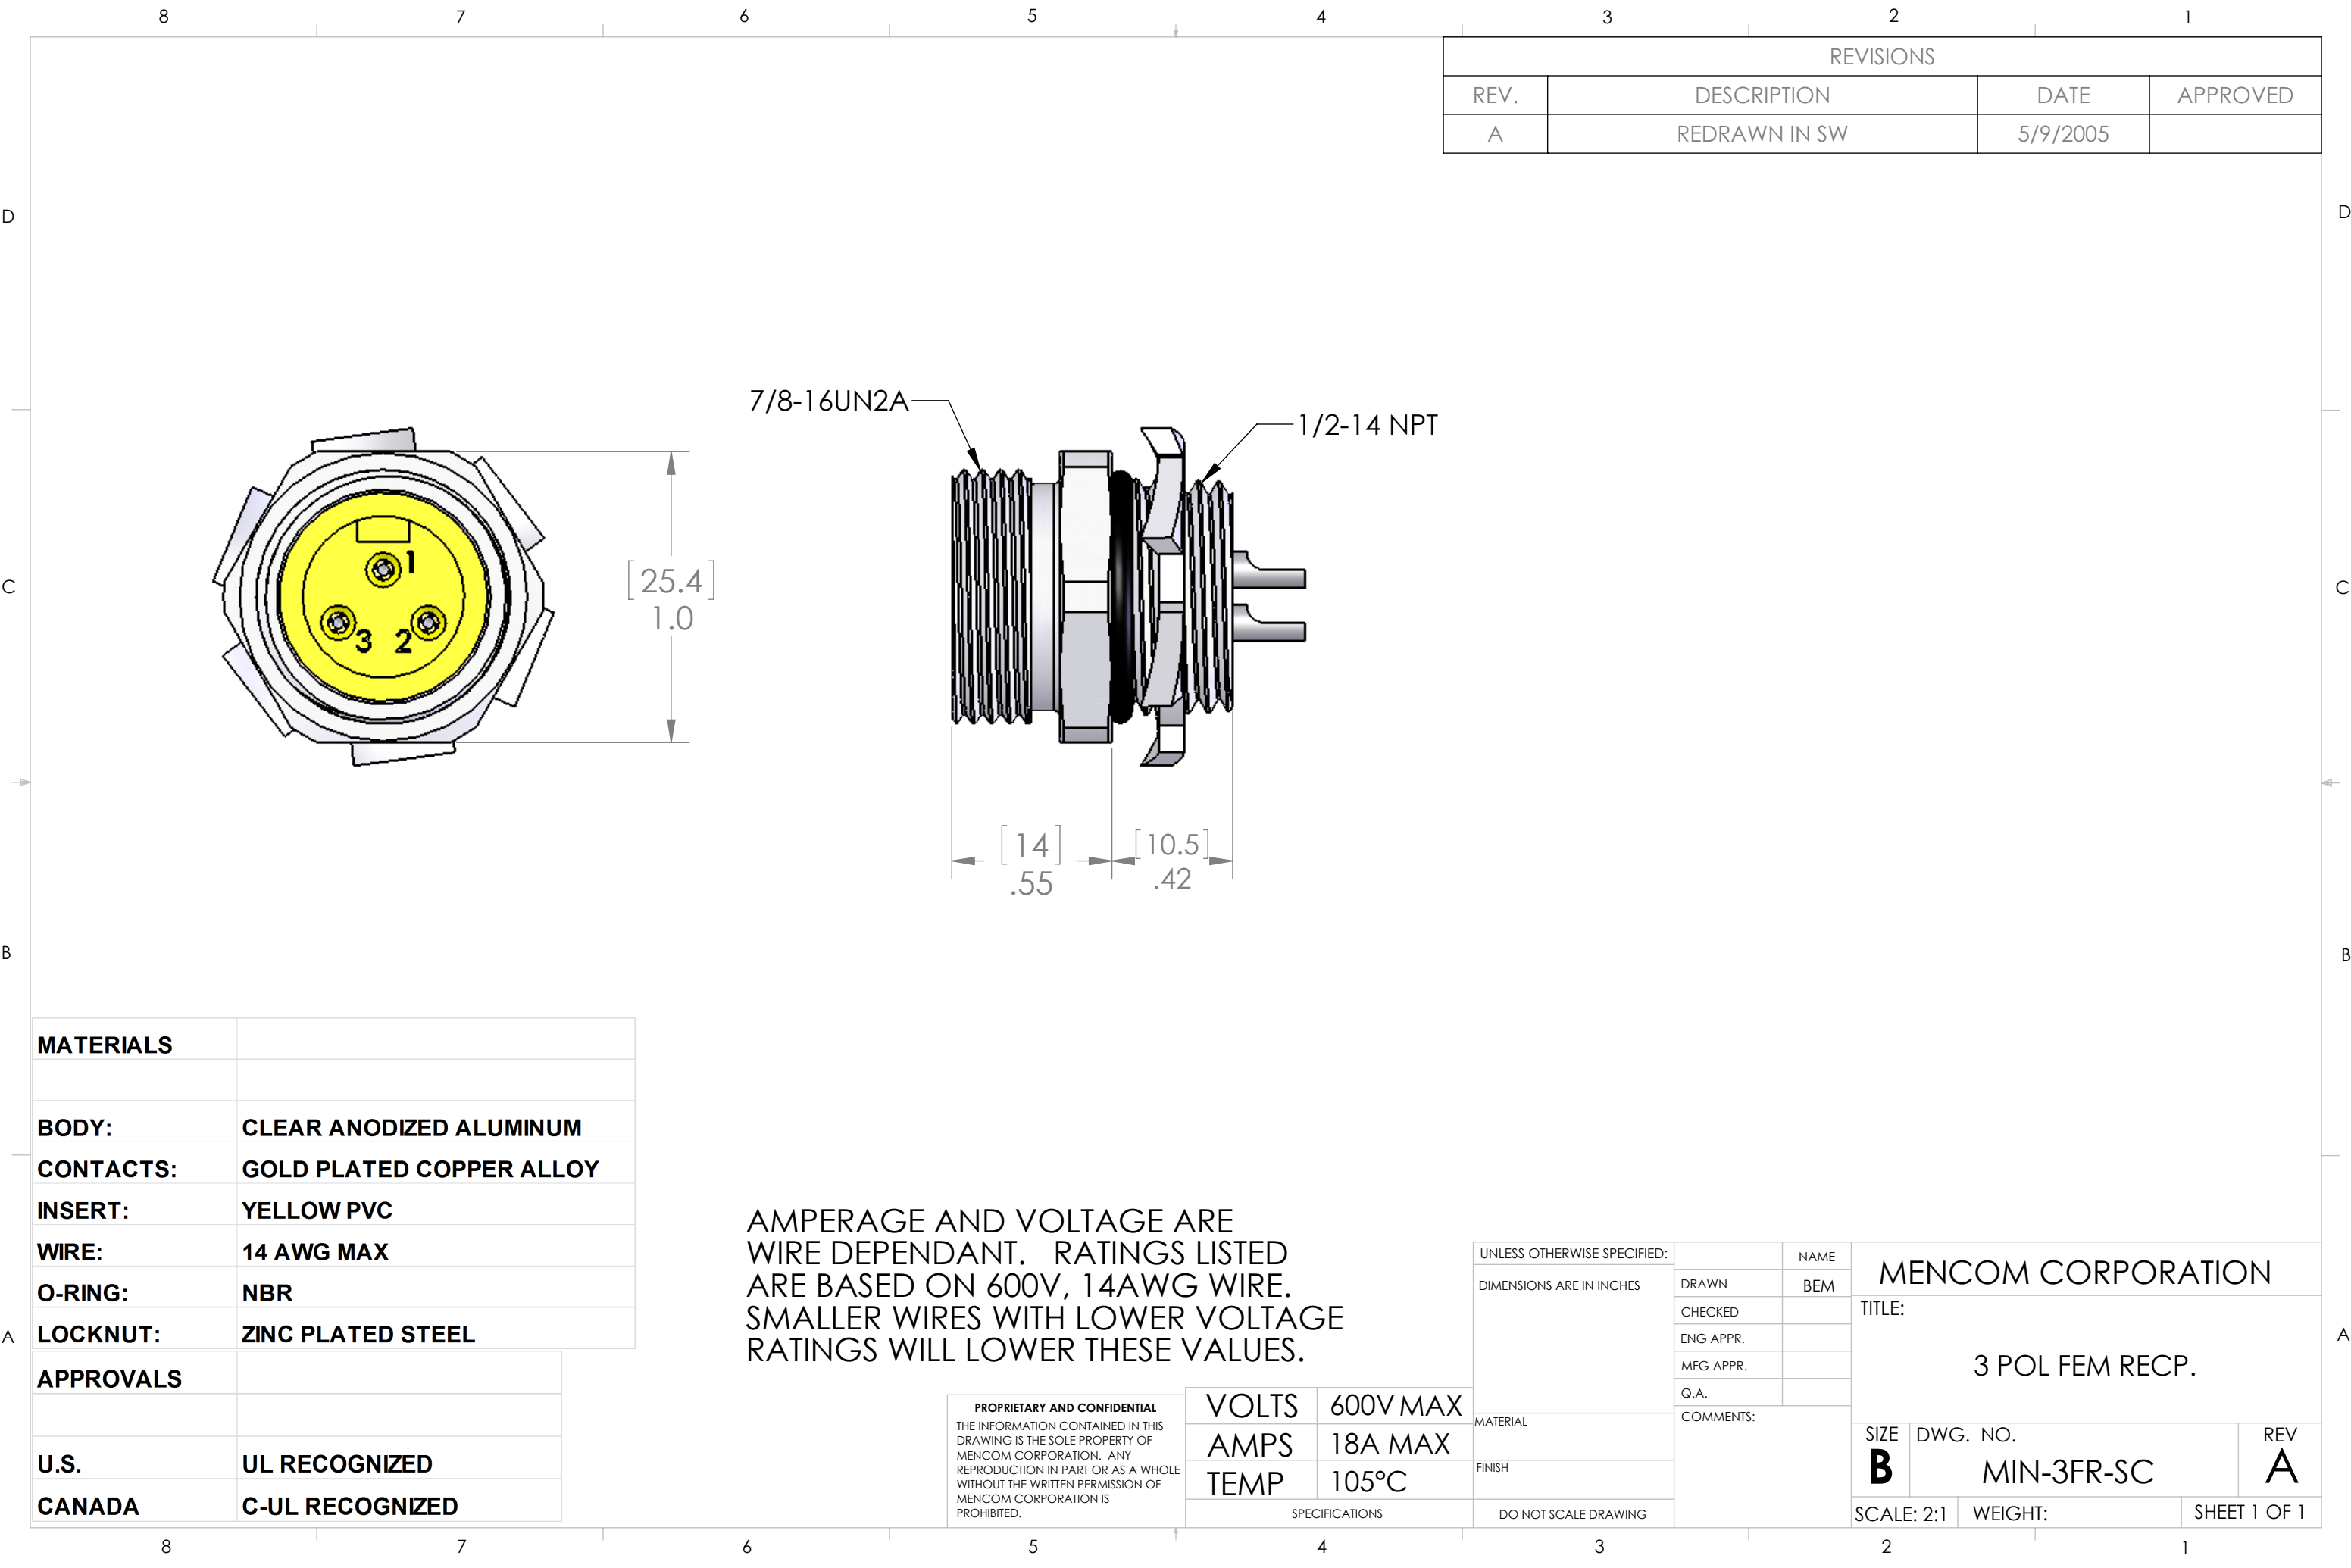

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	5/9/2005	

MATERIALS	
BODY:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
INSERT:	YELLOW PVC
WIRE:	14 AWG MAX
O-RING:	NBR
LOCKNUT:	ZINC PLATED STEEL
APPROVALS	
U.S.	UL RECOGNIZED
CANADA	C-UL RECOGNIZED

AMPERAGE AND VOLTAGE ARE WIRE DEPENDANT. RATINGS LISTED ARE BASED ON 600V, 14AWG WIRE. SMALLER WIRES WITH LOWER VOLTAGE RATINGS WILL LOWER THESE VALUES.

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	600V MAX
AMPS	18A MAX
TEMP	105°C
SPECIFICATIONS	

UNLESS OTHERWISE SPECIFIED:		NAME
DIMENSIONS ARE IN INCHES	DRAWN	BEM
	CHECKED	
	ENG APPR.	
	MFG APPR.	
	Q.A.	
	COMMENTS:	
MATERIAL		
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION		
TITLE:		
3 POL FEM RECP.		
SIZE	DWG. NO.	REV
B	MIN-3FR-SC	A
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1