PIN #	COLOR
1	BLACK
2	WHITE
3	RED
4	GREEN / YELLOW

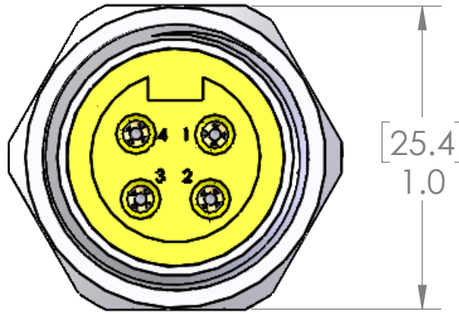

[25.4]
1.0

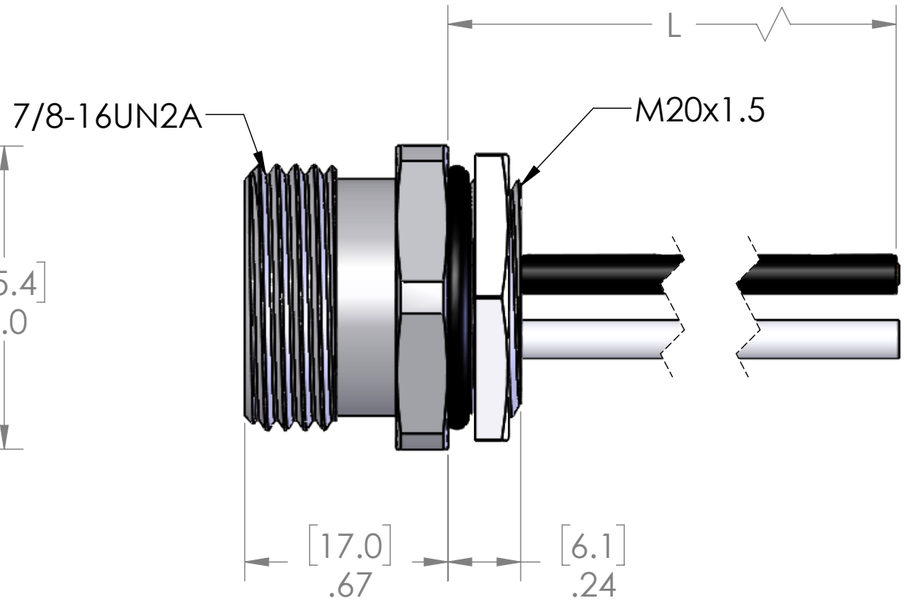

MATERIALS	
SHELL:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRES:	
STYLE:	UL 1015
AWG:	16/4
JACKET:	PVC
VOLTAGE:	600V
INSERT:	YELLOW PVC
O-RING:	NBR
NUT:	NICKEL PLATED BRASS
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

TABLE A	
P/N	L
MIN-4FR-0.5-M20	6" [0.15M]
MIN-4FR-1-M20	12" [0.3M]
MIN-4FR-2-M20	24" [0.6M]
MIN-4FR-3-M20	36" [0.91M]
MIN-4FR-4-M20	48" [1.2M]
MIN-4FR-5-M20	60" [1.5M]
MIN-4FR-6-M20	72" [1.8M]
MIN-4FR-10-M20	120" [3M]

OTHER LENGTHS AVAILABLE
PLEASE CONSULT FACTORY

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	600V
AMPS	10A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]

MATERIAL

FINISH

DO NOT SCALE DRAWING

DRAWN BY	ADM
DRAWN DATE	03/08/2022
CHECKED BY	JJH
CHECK DATE	03/08/2022

COMMENTS:

MENCOM CORPORATION

TITLE:

SIZE B | DWG. NO. MIN-4FR-ZZ-M20 | REV B

SCALE: 2:1 | WEIGHT: | SHEET 1 OF 1