WIRING
1--1
2--2
3--3
4--4

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	DRAWIN IN SW	5/21/2013	DCT

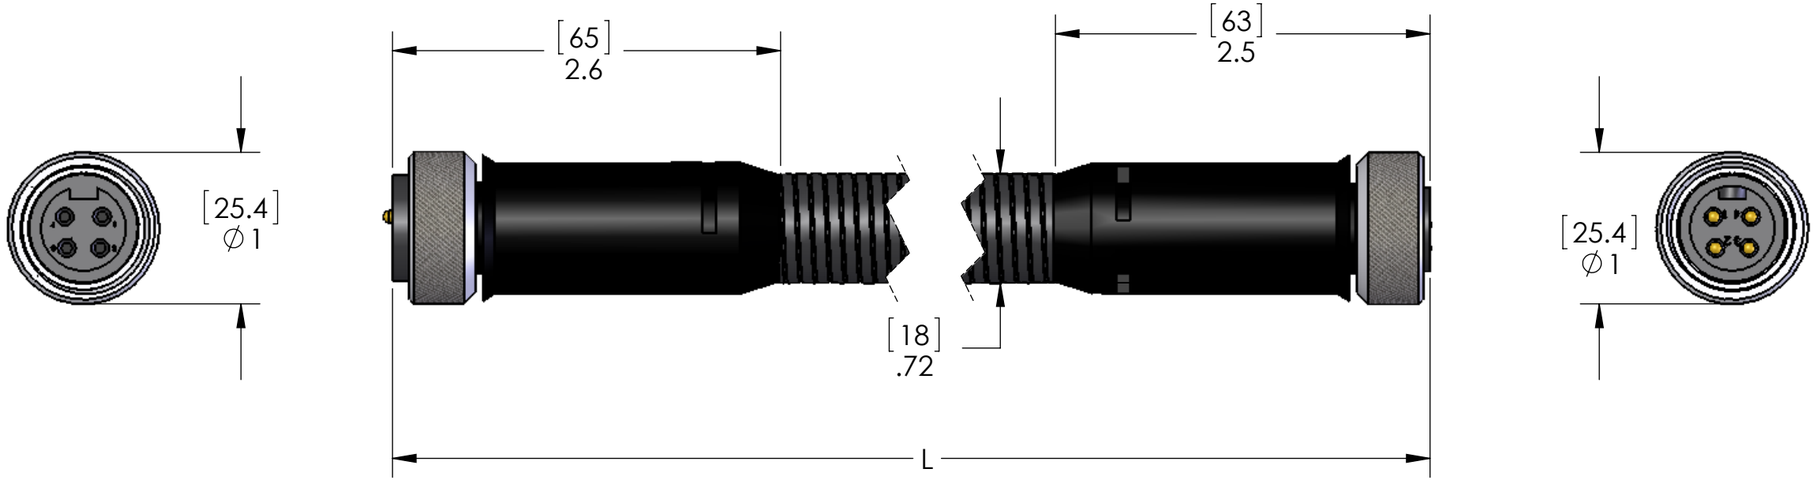

TABLE A	
P/N	L
MIN-4MFP-1M-A03	40"[1M]
MIN-4MFP-2M-A03	79"[2M]
MIN-4MFP-3M-A03	118"[3M]
MIN-4MFP-4M-A03	157"[4M]
MIN-4MFP-5M-A03	197"[5M]
MIN-4MFP-6M-A03	240"[6M]
MIN-4MFP-8M-A03	314"[8M]
MIN-4MFP-10M-A03	393"[10M]
MIN-4MFP-15M-A03	590"[15M]
MIN-4MFP-20M-A03	786"[20M]

MATERIALS	
BODY:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	16/4 STOOW YELLOW JACKET
COUPLING:	NICKEL PLATED BRASS
INSERT:	POLYAMIDE
ARMOR:	SS FLEX TUBE, BLK PVC JACKET

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	600V
AMPS	10A
TEMP	105°C

SPECIFICATIONS

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL ±1/64
ANGULAR: MACH ± 5° BEND ±5°
ZERO PLACE DECIMAL ±.5
ONE PLACE DECIMAL ±.1
TWO PLACE DECIMAL ±.01
THREE PLACE DECIMAL ±.004

MATERIAL

FINISH

DO NOT SCALE DRAWING

	NAME
DRAWN	JJH
CHECKED	
ENG APPR.	
MFG APPR.	
Q.A.	

COMMENTS:

MENCOM CORPORATION

TITLE:

SIZE	DWG. NO.	REV
B	MIN-4MFP-ZZ-A03	A

SCALE: 1:1	WEIGHT:	SHEET 1 OF 1