


PIN #	COLOR
1	GRAY
2	RED
3	BLACK
4	WHITE
5	BLUE

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	DRAWN IN SW	7/17/2013	DCT

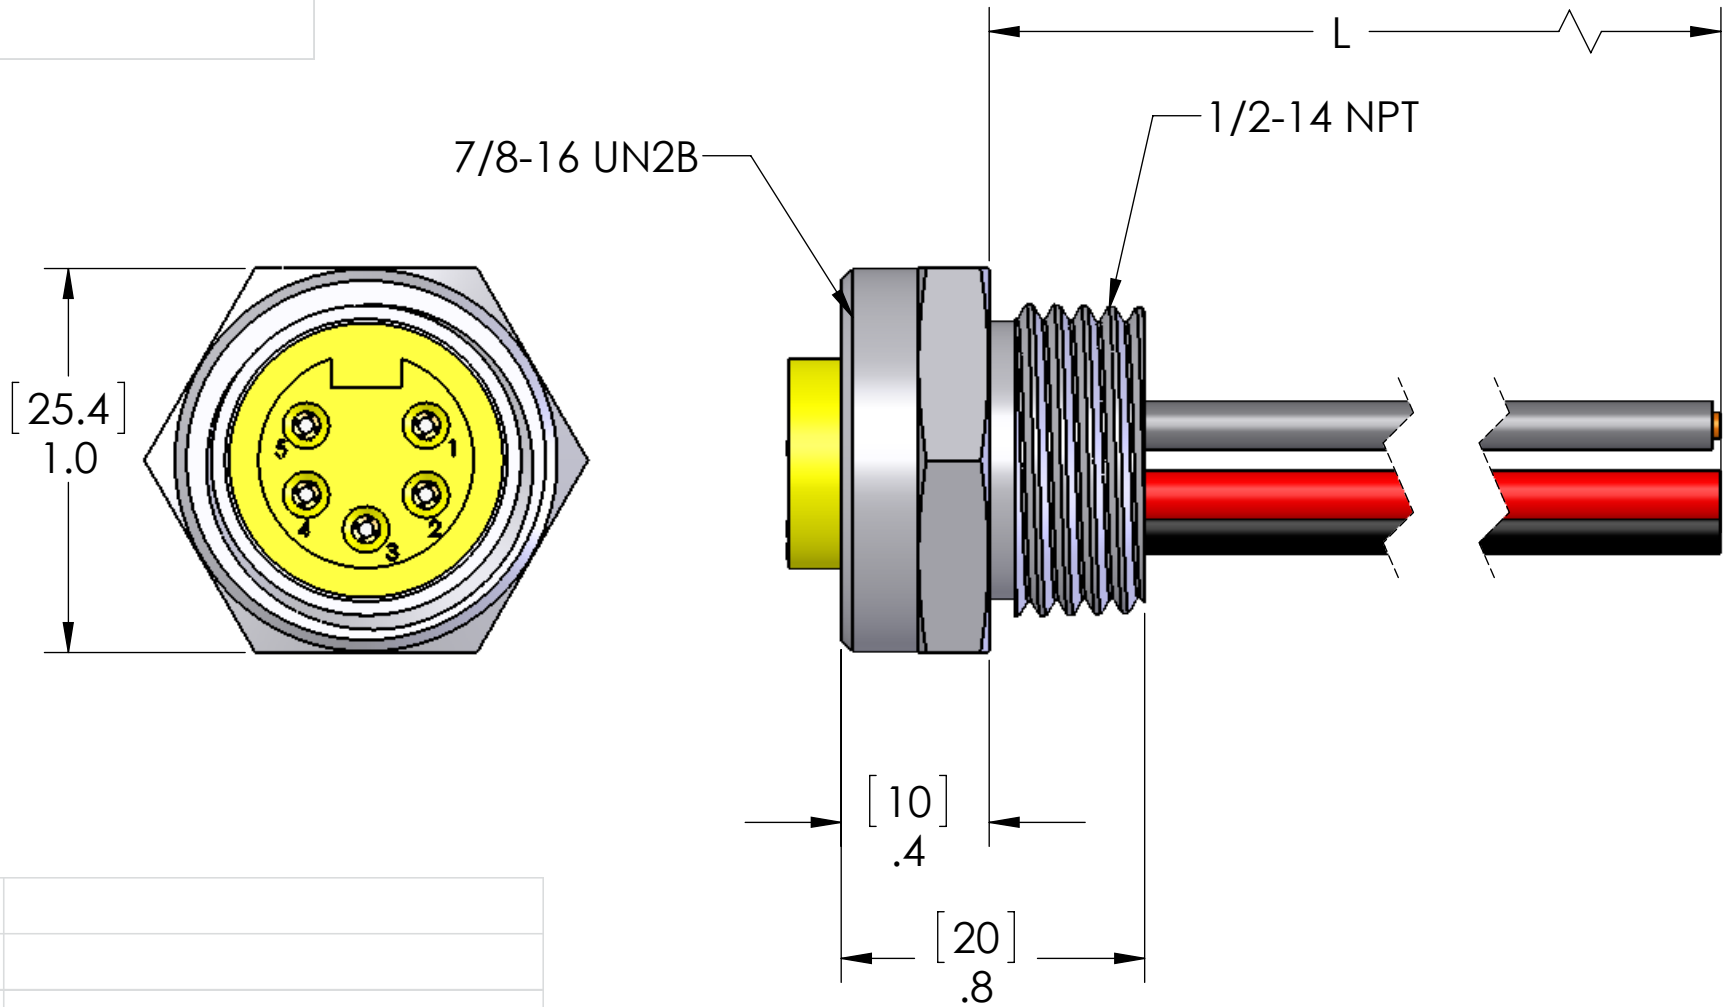

MATERIALS	
BODY:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
INSERT:	YELLOW PVC
WIRE:	16AWG UL1015
LOCKNUT:	ZINC PLATED STEEL
O-RING:	NBR

APPROVALS	
U.S.	UL RECOGNIZED
CANADA	C-UL RECOGINIZED

LOCKNUT AND O-RING ARE INCLUDE ON LENGTHS OF 24" AND LONGER.

TABLE A	
P/N	L
MIN-5FR-.5-DN	6"[.15M]
MIN-5FR-1-DN	12"[.3M]
MIN-5FR-2-DN	24"[.61M]
MIN-5FR-3-DN	36"[0.9M]
MIN-5FR-4-DN	48"[1.2M]
MIN-5FR-6-DN	72"[1.8M]
MIN-5FR-10-DN	120"[3M]
MIN-5FR-15-DN	180"[4.6M]
MIN-5FR-20-DN	240"[6.1M]

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	600V
AMPS	8A
TEMP	105°C
SPECIFICATIONS	

UNLESS OTHERWISE SPECIFIED:	NAME
DIMENSIONS ARE IN INCHES AND [MM]	BEM
MATERIAL	
FINISH	
DO NOT SCALE DRAWING	

MENCOM CORPORATION		
TITLE:		
SIZE	DWG. NO.	REV
B	MIN-5FR-ZZ-DN	A
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1