


PIN #	COLOR
1	WHITE
2	RED
3	GREEN / YELLOW
4	ORANGE
5	BLACK

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	7/29/2005	

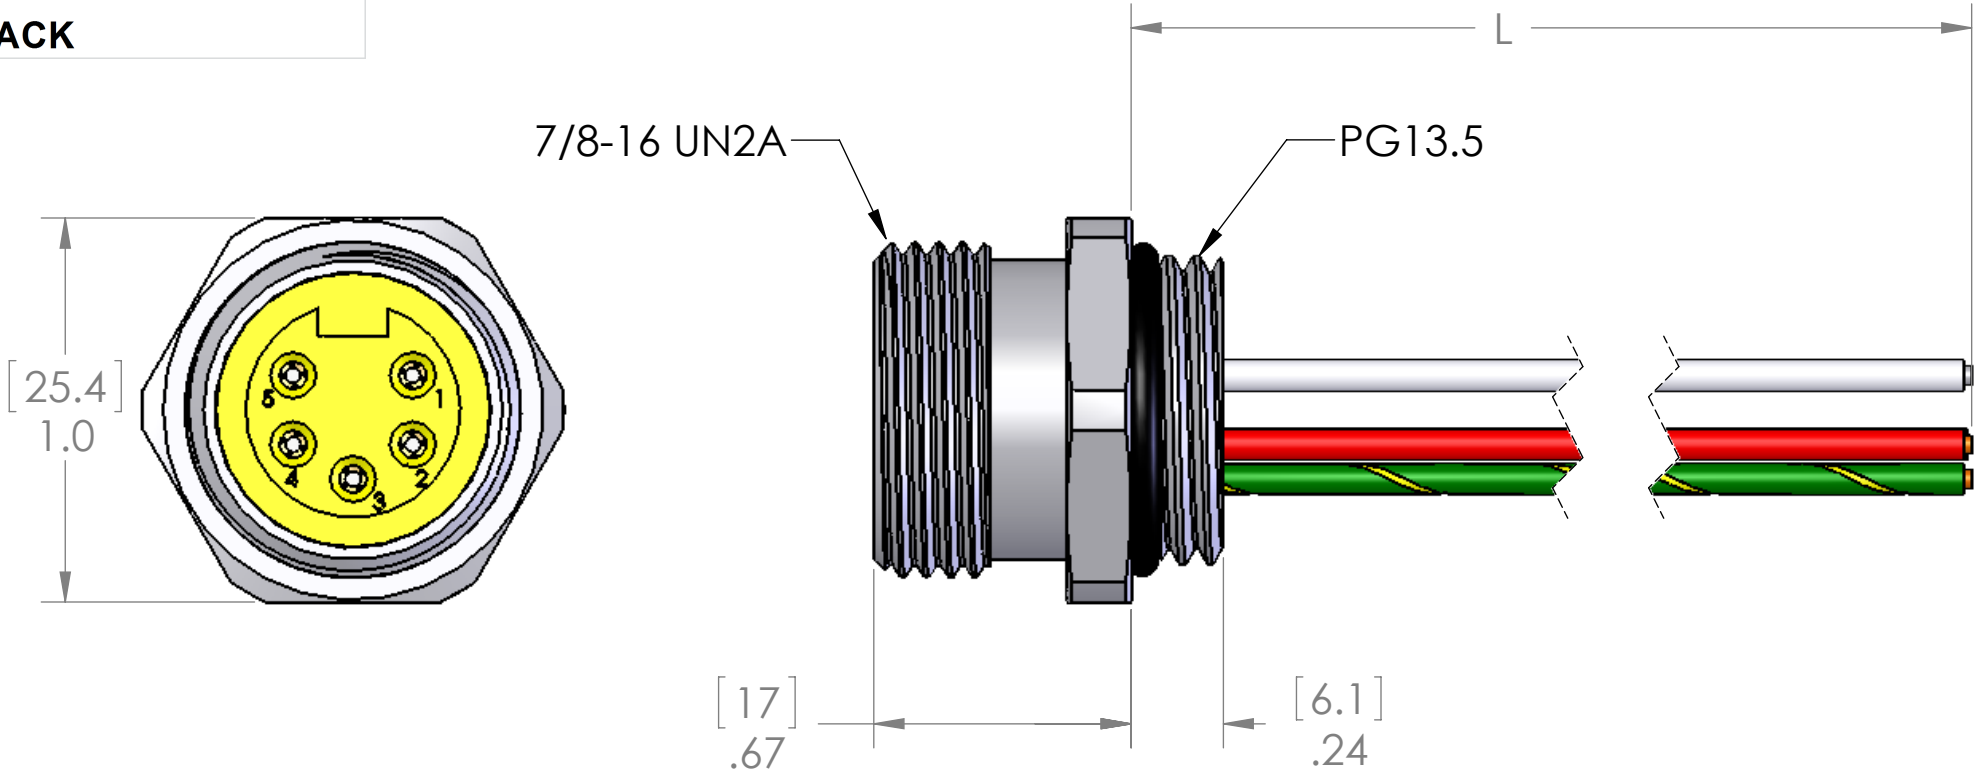

P/N	L
MIN-5FR-1-18-PG13.5	12" [0.3m]
MIN-5FR-2-18-PG13.5	24" [0.6m]
MIN-5FR-3-18-PG13.5	36" [0.9m]
MIN-5FR-4-18-PG13.5	48" [1.2m]
MIN-5FR-5-18-PG13.5	60" [1.5m]
MIN-5FR-6-18-PG13.5	72" [1.8m]
MIN-5FR-8-18-PG13.5	84" [2.1m]
MIN-5FR-10-18-PG13.5	120" [3.1m]
MIN-5FR-15-18-PG13.5	180" [4.6m]
MIN-5FR-20-18-PG13.5	240" [6.1m]

MATERIALS	
BODY:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
INSERT:	YELLOW PVC
WIRE:	18AWG UL1007
O-RING:	NBR
LOCKNUT:	NICKEL PLATED BRASS

APPROVALS	
U.S.	UL RECOGNIZED
CANADA	C-UL RECOGNIZED

FOR LENGTHS OF 24" AND LONGER
A LOCKNUT IS INCLUDED

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	300V
AMPS	5.5A
TEMP	105°C

SPECIFICATIONSDO NOT SCALE DRAWING

UNLESS OTHERWISE SPECIFIED:	NAME
DIMENSIONS ARE IN INCHES AND [MM]	DWM
MATERIAL	
FINISH	
DO NOT SCALE DRAWING	

MENCOM CORPORATION		
TITLE:		
SIZE	DWG. NO.	REV
B	MIN-5FR-ZZ-18-PG13.5	A
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1