
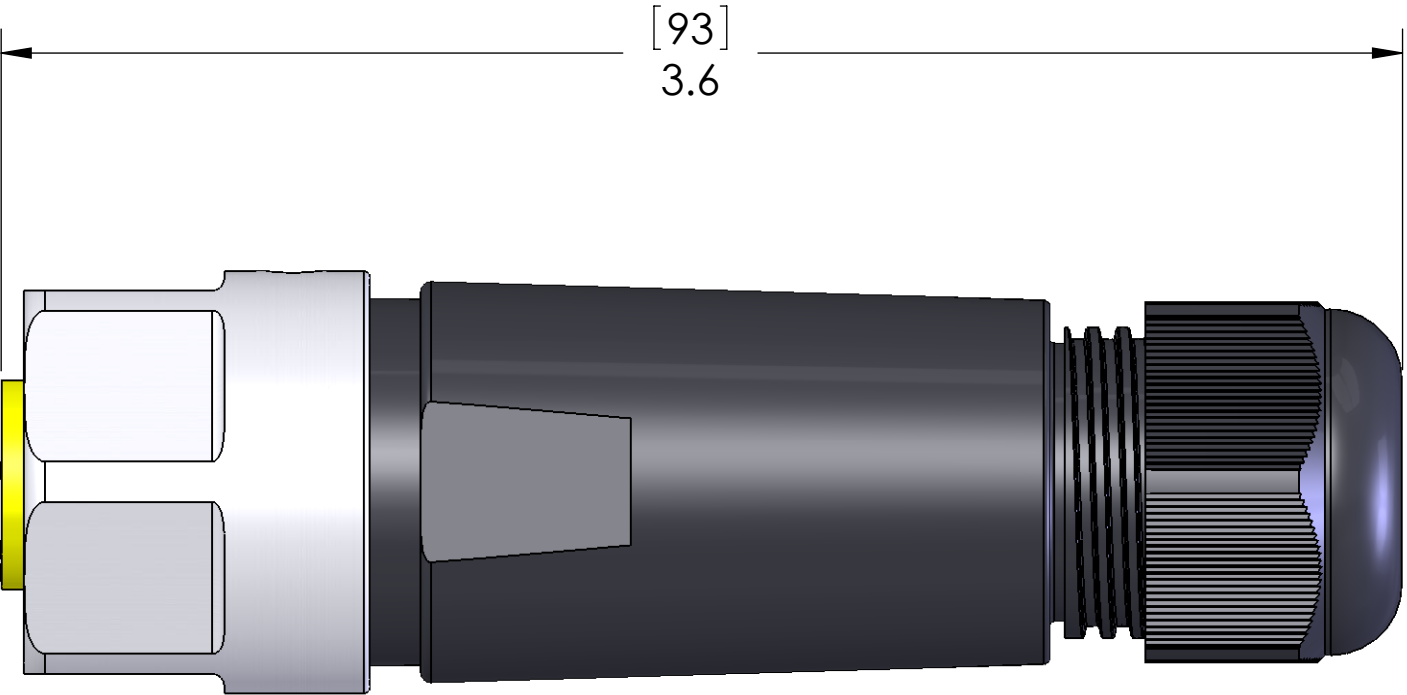


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	8/15/2006	

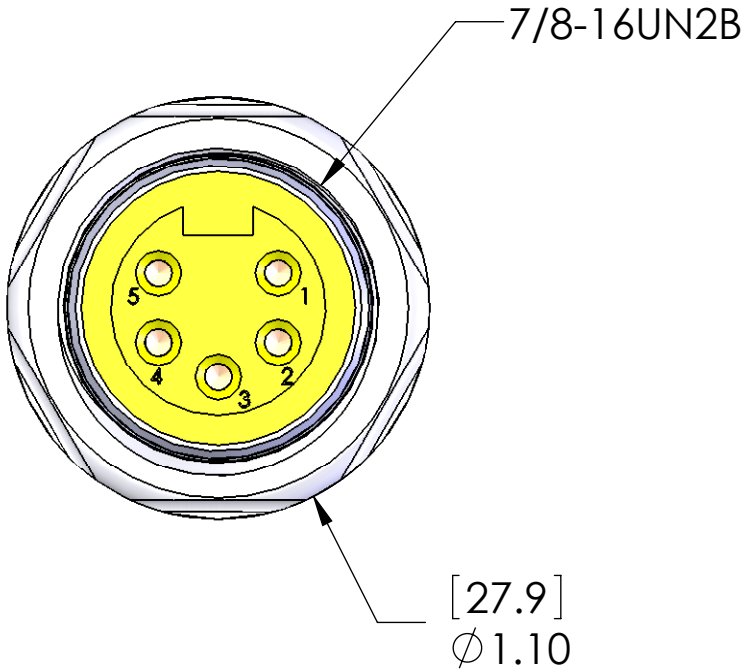

ALL CONNECTIONS MADE VIA SCREW TERMINALS

MATERIALS	
BODY:	BLACK POLYAMIDE
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE SEAL:	NBR
INSERT:	YELLOW PVC
COUPLING:	STAINLESS STEEL
RATINGS	
AMPS:	14AWG - 12A max 16AWG - 8A max 18AWG - 5.5A max 20-22AWG - 4A max
VOLTS:	600V MAX
SEAL:	IP67
CABLE RANGE:	14AWG - 22AWG 0.20" - 0.51" (5mm - 13mm) OD
APPROVALS	
US:	UL RECOGNIZED
CANADA:	C-UL RECOGNIZED

Voltage rating is 600V or the rating of the cable, whichever is less.

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:	NAME	MENCOM CORPORATION		
		DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	BEM	TITLE:	
			CHECKED			
			ENG APPR.			
			MFG APPR.			
			Q.A.			
		MATERIAL	COMMENTS:	SIZE	DWG. NO.	REV
				B	MIN-5FP-FW-SS	A
				FINISH		
		DO NOT SCALE DRAWING		SCALE: 2:1	WEIGHT:	SHEET 1 OF 1