

PIN #	COLOR
1	WHITE
2	RED
3	GREEN / YELLOW
4	ORANGE
5	BLACK

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	7/23/2004	

D

D

C

C

B

B

A

A

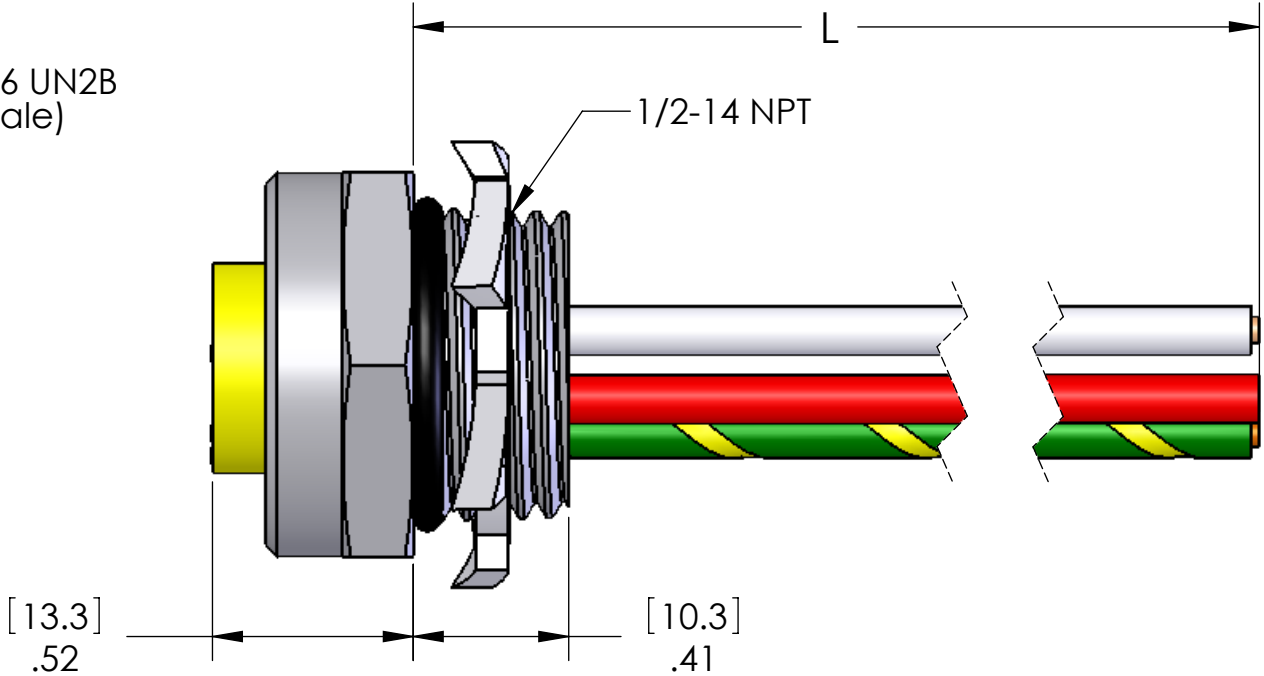
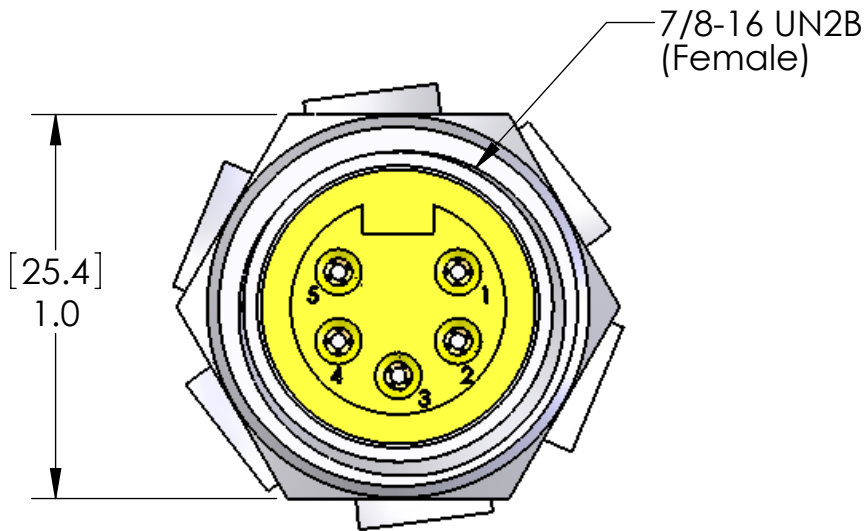


TABLE A	
P/N	L
MIN-5FRF-1	12" [0.3m]
MIN-5FRF-2	24" [0.6m]
MIN-5FRF-3	36" [0.9m]
MIN-5FRF-4	48" [1.2m]
MIN-5FRF-5	60" [1.5m]
MIN-5FRF-6	72" [1.8m]
MIN-5FRF-10	120" [3.0m]
MIN-5FRF-15	180" [4.6m]
MIN-5FRF-20	240" [6.1m]

MATERIALS	
BODY:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
INSERT:	YELLOW PVC
WIRE:	16AWG UL1015
O-RING:	NBR
LOCKNUT:	ZINC PLATED STEEL

APPROVALS	
U.S.	UL LISTED
CANADA	C-UL LISTED

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	600V
AMPS	8A
TEMP	105°C

SPECIFICATIONS DO NOT SCALE DRAWING

UNLESS OTHERWISE SPECIFIED:		NAME	MENCOM CORPORATION	
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	BEM		
	CHECKED			
	ENG APPR.			
	MFG APPR.			
	Q.A.		TITLE:	
	COMMENTS:			
MATERIAL			SIZE	DWG. NO.
FINISH			B	MIN-5FRF-ZZ
			SCALE: 2:1	WEIGHT:
				SHEET 1 OF 1

REV	A
-----	---