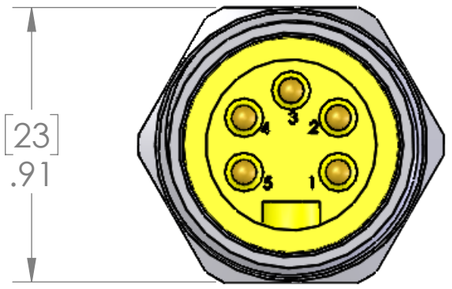
PIN #	COLOR
1	WHITE
2	RED
3	GREEN / YELLOW
4	ORANGE
5	BLACK



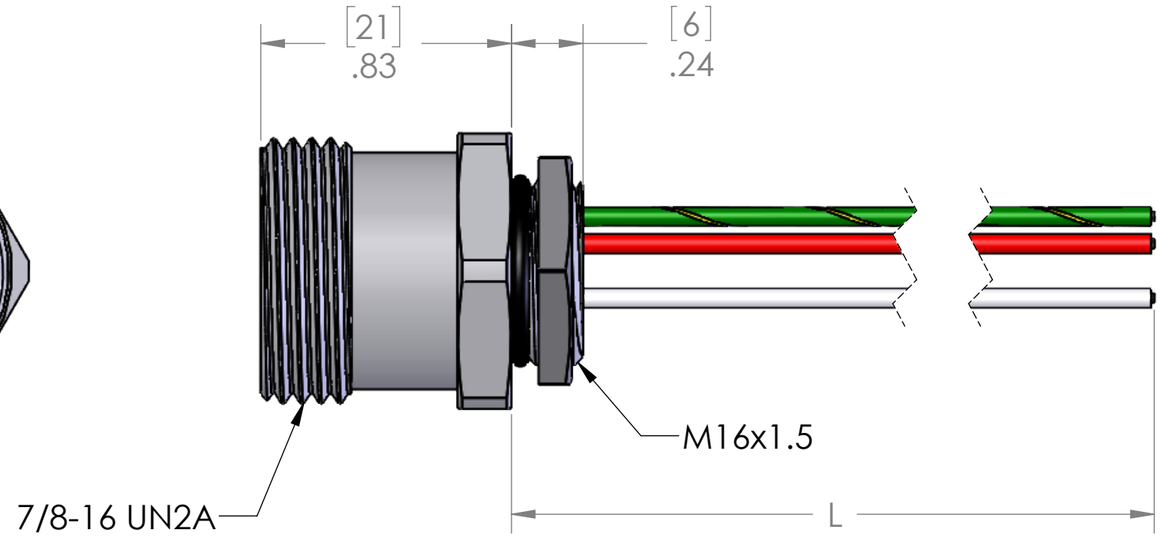


TABLE A	
P/N	L
MIN-5MR-.5-22-M16	6" [0.15m]
MIN-5MR-1-22-M16	12" [0.3m]
MIN-5MR-2-22-M16	24" [0.6m]
MIN-5MR-3-22-M16	39" [1.0m]
MIN-5MR-6-22-M16	79" [2.0m]
MIN-5MR-10-22-M16	120" [3.0m]

MATERIALS	
SHELL:	Clear Anodized Aluminum
CONTACTS:	Gold Plated Copper Alloy
WIRES:	
STYLE:	UL1007 / 1569
AWG:	22
JACKET:	PVC
VOLTAGE:	300
INSERT:	Yellow PVC
O-RING:	NBR
NUT:	Nickel Plated Brass
APPROVALS	
US:	UL LISTED
CANADA:	C-UL LISTED
ROHS:	YES
CE & UKCA:	YES
RATINGS	
PROTECTION CLASS:	UL TYPE 4 & 12, IEC IP69

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]
MATERIAL
FINISH
DO NOT SCALE DRAWING

DRAWN BY	ADM
DRAWN DATE	06/28/2023
CHECKED BY	JJH
CHECK DATE	06/28/2023

COMMENTS:

MENCOM CORPORATION

TITLE:
5 PL ML RECP 22AWG

SIZE	DWG. NO.	REV
B	MIN-5MR-ZZ-22-M16	B

SCALE: 2:1 | WEIGHT: | SHEET 1 OF 1