
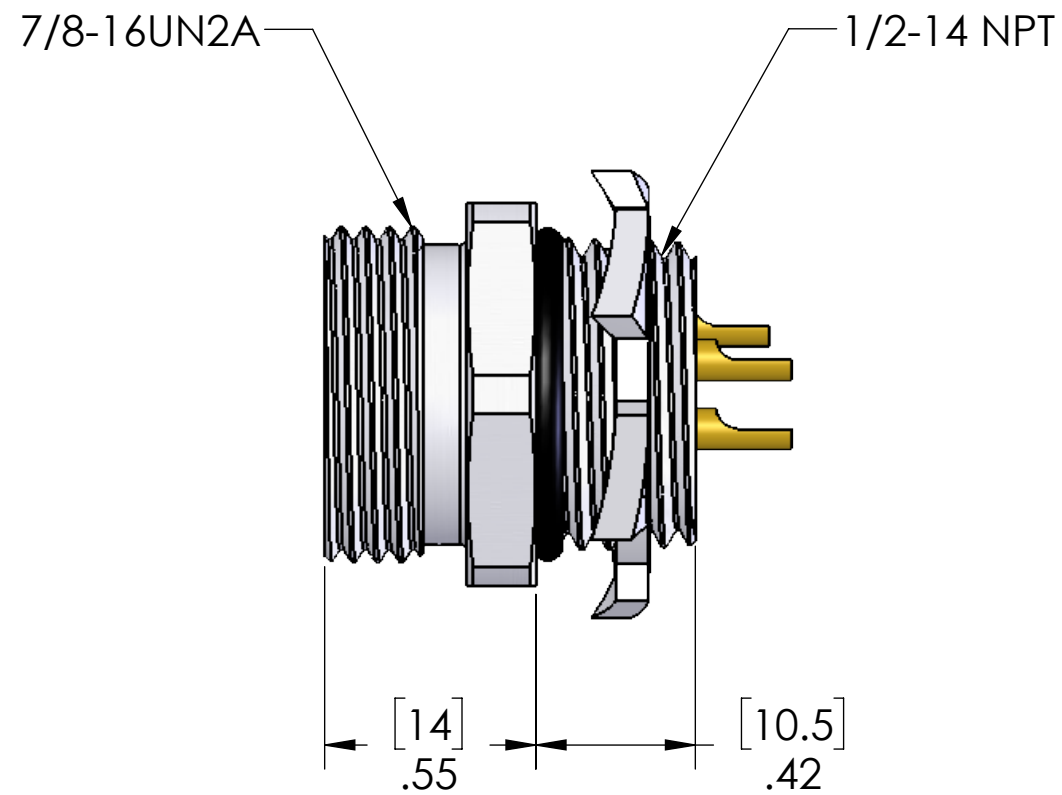


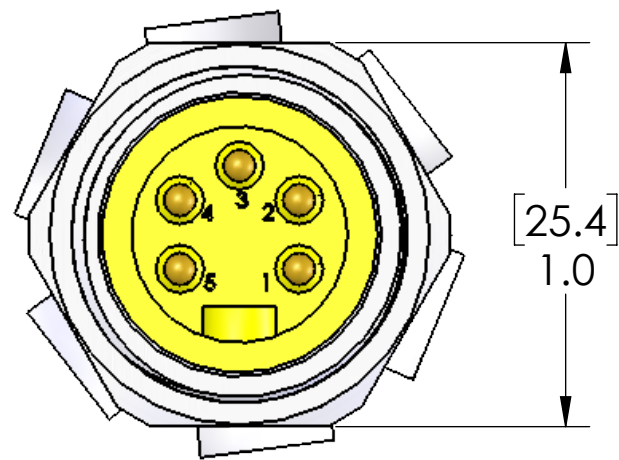

MATERIALS	
BODY:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
INSERT:	YELLOW PVC
WIRE:	14 AWG MAX
O-RING:	NBR
LOCKNUT:	ZINC PLATED STEEL

AMPERAGE AND VOLTAGE ARE WIRE DEPENDANT. RATINGS LISTED ARE BASED ON 600V, 14AWG WIRE (WITH ONE WIRE BEING A GROUND). SMALLER WIRES WITH LOWER VOLTAGE RATINGS WILL LOWER THESE VALUES.

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	600V MAX
AMPS	8A MAX
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:		DRAWN BY	ADM	MENCOM CORPORATION					
DIMENSIONS ARE IN INCHES AND [MM]		DRAWN DATE	02/22/2018					TITLE:	
		CHECKED BY							
		CHECK DATE							
		COMMENTS:		5 POL MALE RECP SOLDER					
MATERIAL									
FINISH									
DO NOT SCALE DRAWING				SIZE	DWG. NO.		REV		
				B	MIN-5MR-SC		A		
				SCALE: 1:1		WEIGHT:	SHEET 1 OF 1		

REV
A