

PIN #	COLOR
1	WHITE
2	RED
3	GREEN / YELLOW
4	ORANGE
5	BLACK

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	7/23/2004	
B	CORRECTED	7/14/2006	

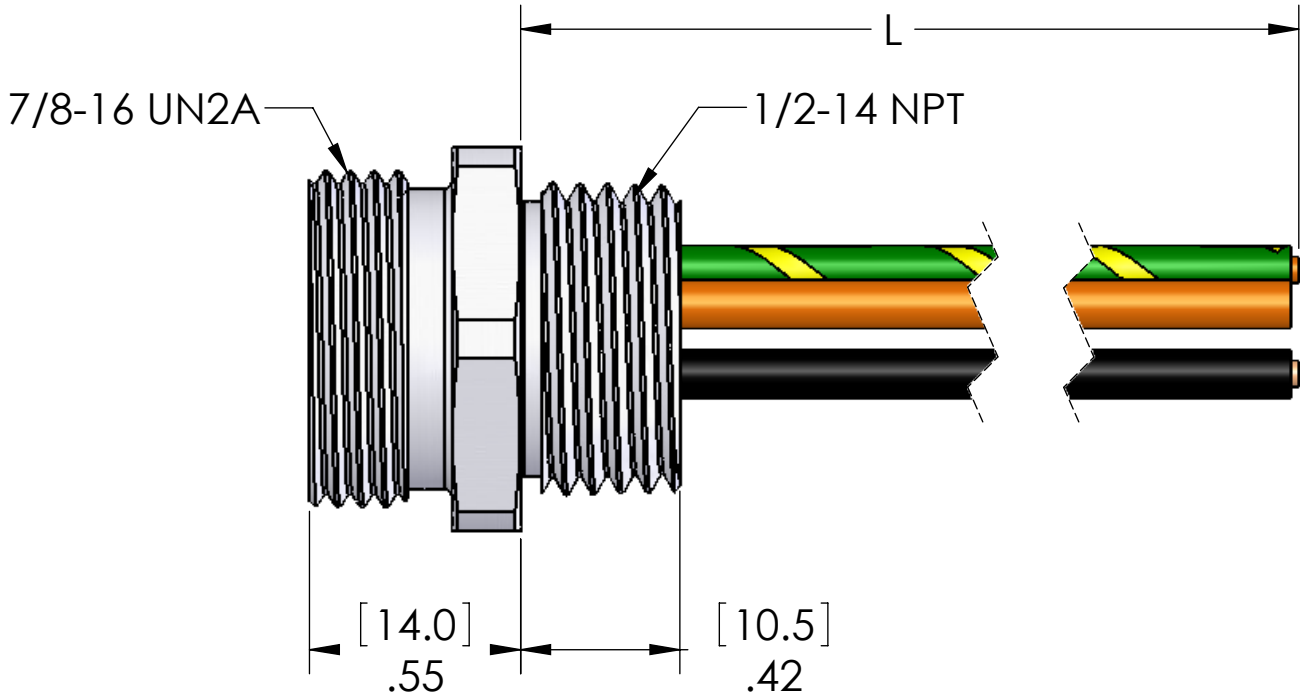
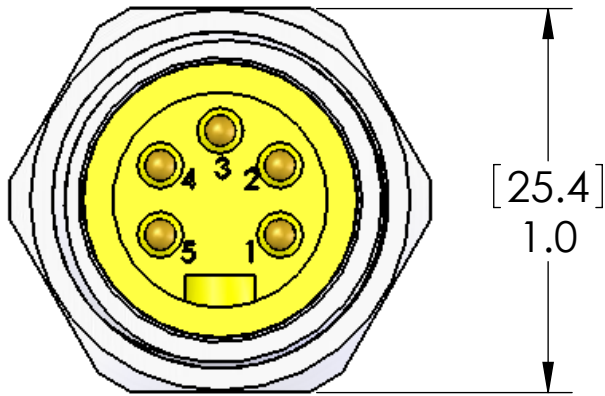


TABLE A

P/N	L
MIN-5MR-1	12" [0.3m]
MIN-5MR-2	24" [0.6m]
MIN-5MR-3	36" [0.9m]
MIN-5MR-4	48" [1.2m]
MIN-5MR-6	72" [1.8m]
MIN-5MR-10	120" [3.0m]
MIN-5MR-15	180" [4.6m]
MIN-5MR-20	240" [6.0m]

MATERIALS	
BODY:	CLEAR ANODIZED ALUMINUM
INSERT:	PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRES:	UL1015 16AWG
LOCKNUT:	ZINC PLATED STEEL
O-RING:	NBR

APPROVALS:	
US	UL LISTED
CANADA	C-UL LISTED

FOR LENGTHS OF 24" AND LONGER AN O-RING AND LOCKNUT ARE INCLUDED

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	600V
AMPS	8A
TEMP	105°C
SPECIFICATIONS	

UNLESS OTHERWISE SPECIFIED:		NAME
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	BEM
	CHECKED	
	ENG APPR.	
	MFG APPR.	
	Q.A.	
	COMMENTS:	
MATERIAL		
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION		
TITLE:		
5 POL MALE RECP 16AWG		
SIZE	DWG. NO.	REV
B	MIN-5MR-ZZ	B
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1