

PIN #	COLOR
1	WHITE
2	RED
3	GREEN / YELLOW
4	ORANGE
5	BLACK

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	3/23/2005	

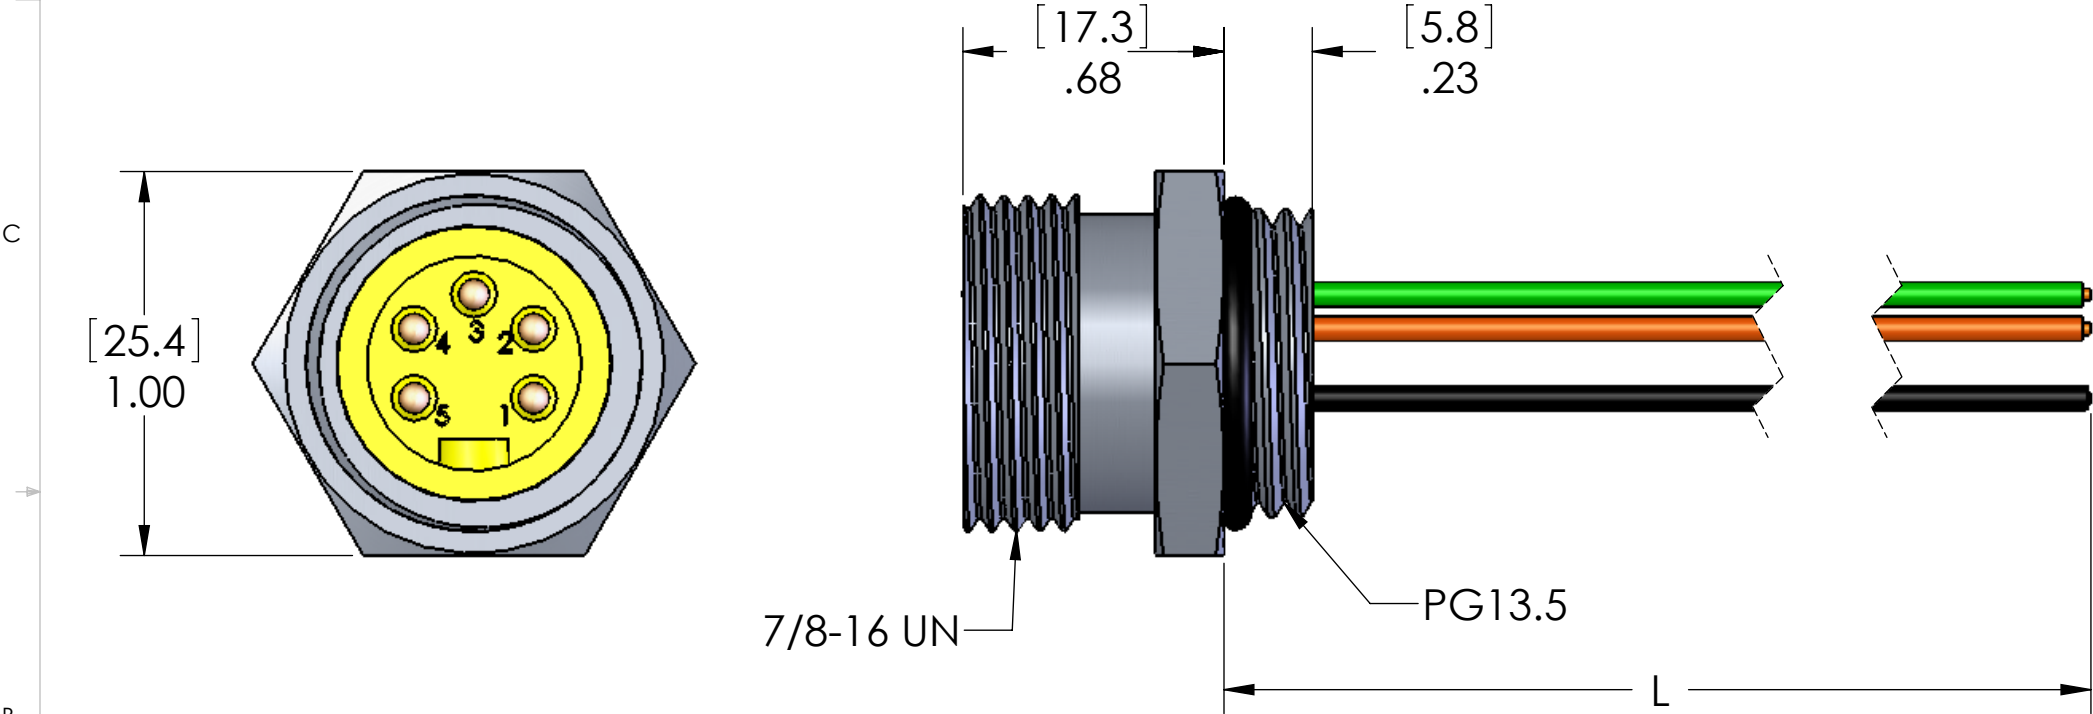


TABLE A	
P/N	L
MIN-5MR-5-22-PG13.5	6"
MIN-5MR-1-22-PG13.5	12"
MIN-5MR-2-22-PG13.5	24"
MIN-5MR-3-22-PG13.5	36"
MIN-5MR-4-22-PG13.5	48"
MIN-5MR-5-22-PG13.5	60"
MIN-5MR-6-22-PG13.5	72"
MIN-5MR-10-22-PG13.5	120"
MIN-5MR-12-22-PG13.5	144"
MIN-5MR-15-22-PG13.5	180"
MIN-5MR-20-22-PG13.5	240"

MATERIALS	
BODY:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
INSERT:	YELLOW PVC
WIRE:	22AWG UL1007
O-RING:	BUNA-N

CERTIFICATIONS	
U.S.	UL RECOGNIZED
CANADA	C-UL RECOGNIZED

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP	105°C

SPECIFICATIONSDO NOT SCALE DRAWING

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]	NAME	BEM
	DRAWN	
	CHECKED	
	ENG APPR.	
	MFG APPR.	
MATERIAL	Q.A.	
	COMMENTS:	
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION		
TITLE: 5 POL MALE RECP 22AWG		
SIZE B	DWG. NO. MIN-5MR-ZZ-22-PG13.5	REV A
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1