

PIN #	COLOR
1	WHITE
2	RED
3	GREEN / YELLOW
4	ORANGE
5	BLACK

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	3/23/2005	

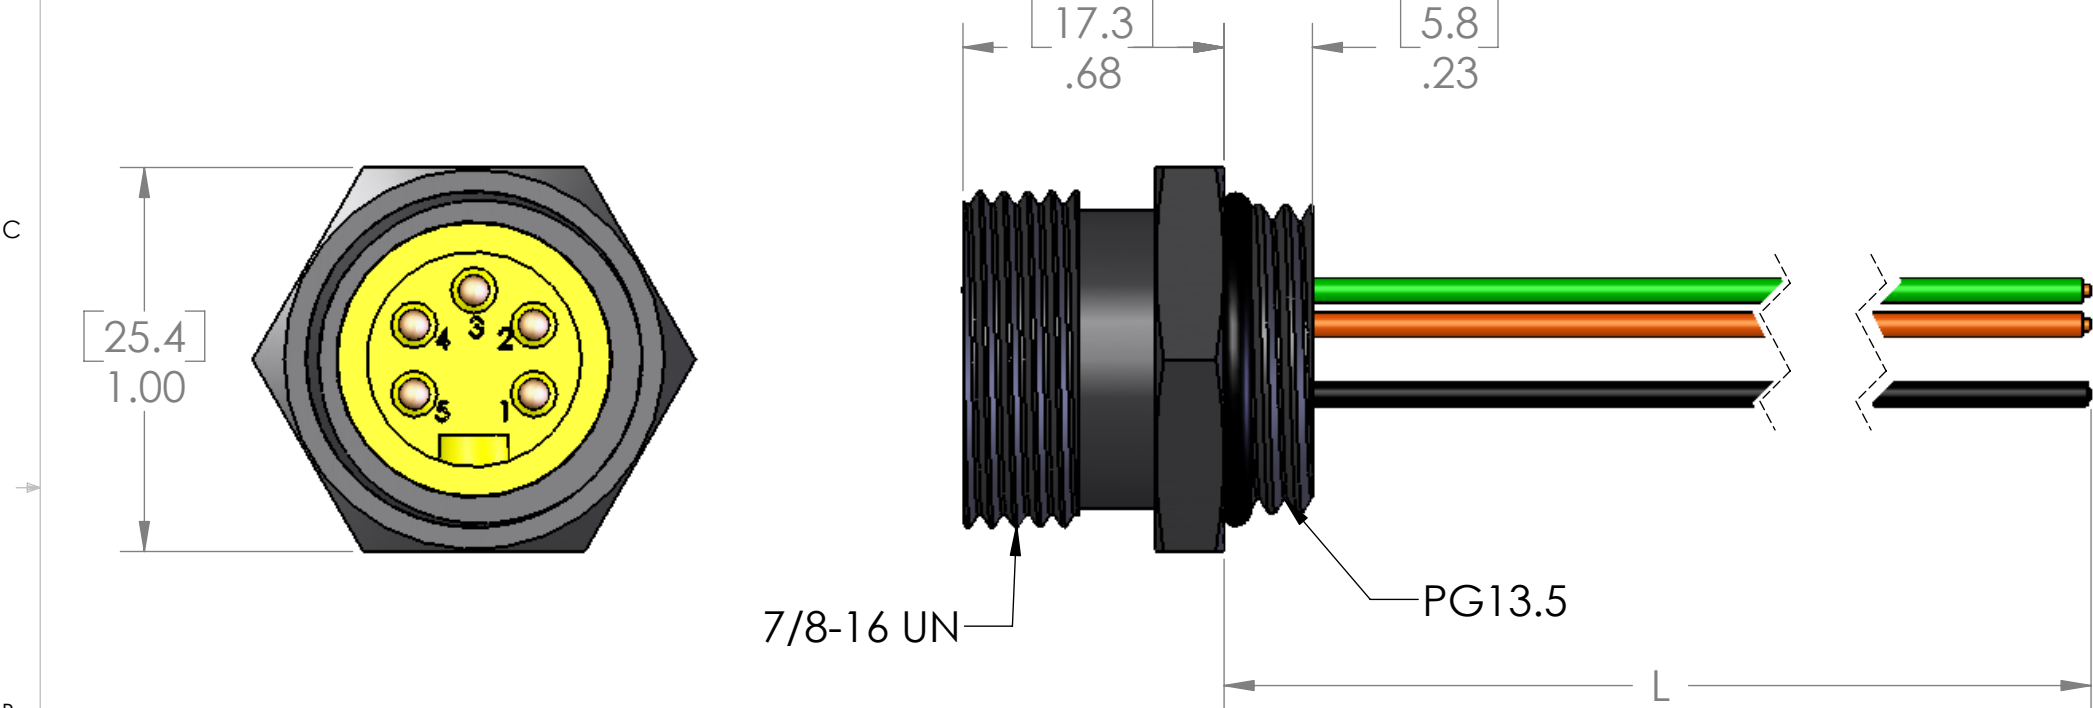


TABLE A		
P/N	L	STD?
MIN-5MR-.5-22-PG13.5-B	6"	NO
MIN-5MR-1-22-PG13.5-B	12"	YES
MIN-5MR-2-22-PG13.5-B	24"	NO
MIN-5MR-3-22-PG13.5-B	36"	YES
MIN-5MR-4-22-PG13.5-B	48"	NO
MIN-5MR-5-22-PG13.5-B	60"	NO
MIN-5MR-6-22-PG13.5-B	72"	YES
MIN-5MR-10-22-PG13.5-B	120"	NO
MIN-5MR-12-22-PG13.5-B	144"	NO
MIN-5MR-15-22-PG13.5-B	180"	NO
MIN-5MR-20-22-PG13.5-B	240"	NO

MATERIALS	
BODY:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
INSERT:	YELLOW PVC
WIRE:	22AWG UL1007
O-RING:	BUNA-N

CERTIFICATIONS	
U.S.	UL RECOGNIZED
CANADA	C-UL RECOGNIZED

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP	105°C
SPECIFICATIONS	

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]		NAME	MENCOM CORPORATION
	DRAWN	BEM	
	CHECKED		
	ENG APPR.		
	MFG APPR.		
	Q.A.		
MATERIAL	COMMENTS:		TITLE: 5 POL MALE RECP 22AWG
FINISH			
DO NOT SCALE DRAWING			

SIZE	DWG. NO.	REV
B	MIN-5MR-ZZ-22-PG13.5-B	A
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1

PARTS LISTED AS NOT BEING STANDARD
MAY REQUIRE MINIMUM ORDERS