
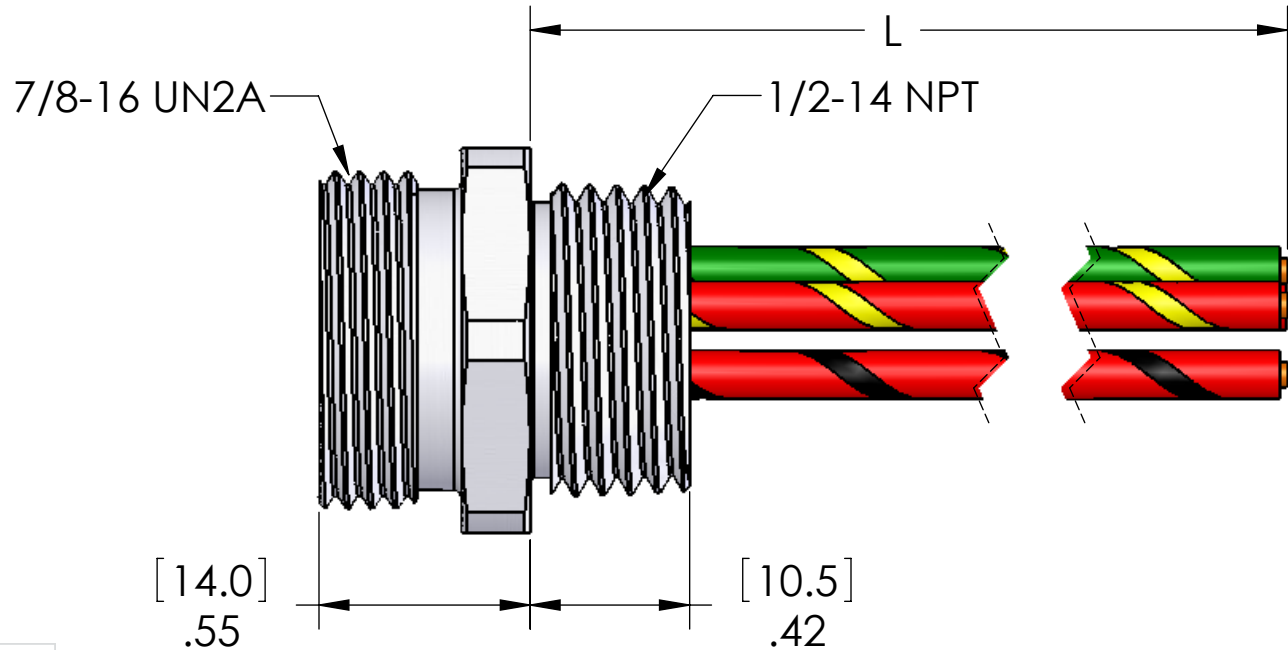


PIN #	COLOR
1	RED w/WHITE
2	RED
3	GREEN / YELLOW
4	RED w/YELLOW
5	RED w/BLACK

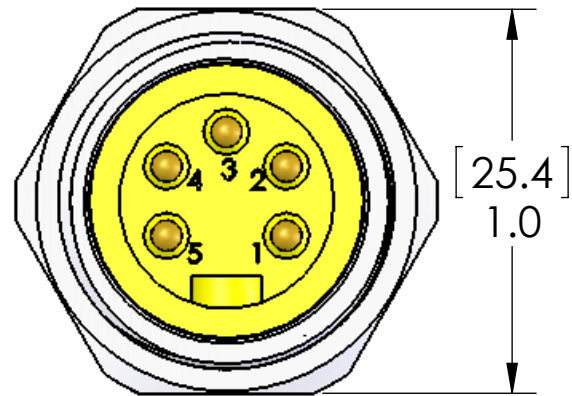

FOR LENGTH OF 24" AND LONGER
A LOCKNUT AND O-RING ARE INCLUDED

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	7/23/2004	

MATERIAL	
BODY:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
INSERT:	YELLOW PVC
WIRE:	16AWG UL1015
O-RING:	NBR
LOCKNUT:	ZINC PLATED STEEL

P/N	L
MIN-5MR-1A	12" [0.3m]
MIN-5MR-2A	24" [0.6m]
MIN-5MR-3A	36" [0.9m]
MIN-5MR-4A	48" [1.2m]
MIN-5MR-6A	72" [1.8m]
MIN-5MR-10A	120" [3.1m]
MIN-5MR-15A	180" [4.6m]
MIN-5MR-20A	240" [6.1m]

APPROVALS:	
U.S.	UL LISTED
CANADA	C-UL LISTED

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	600V
AMPS	8A
TEMP	105°C

SPECIFICATIONS

UNLESS OTHERWISE SPECIFIED:		NAME
DIMENSIONS ARE IN INCHES	DRAWN	BEM
	CHECKED	
	ENG APPR.	
	MFG APPR.	
	Q.A.	
	COMMENTS:	
MATERIAL		
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION

TITLE:

5 POL MALE RECP 16AWG

SIZE	DWG. NO.	REV
B	MIN-5MR-ZZA	A

SCALE: 2:1 WEIGHT: SHEET 1 OF 1