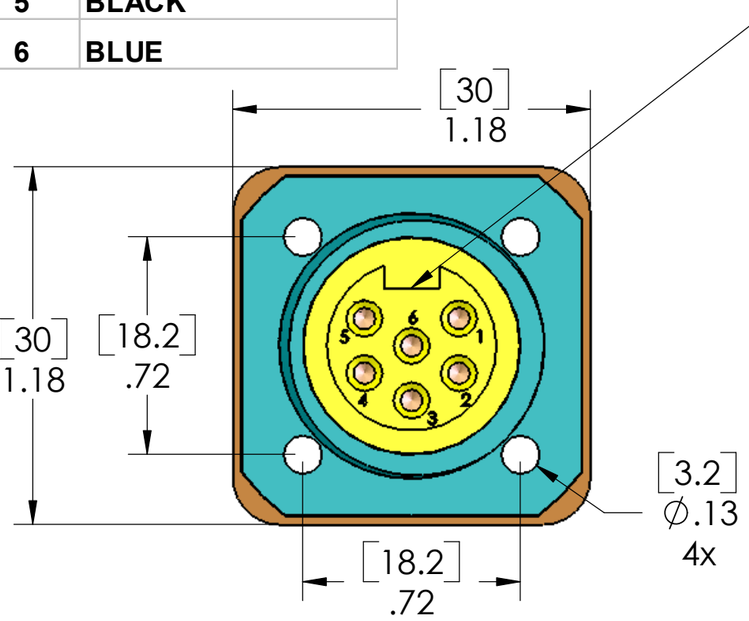
PIN #	COLOR
1	WHITE
2	RED
3	GREEN / YELLOW
4	ORANGE
5	BLACK
6	BLUE

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	5/2/2005	



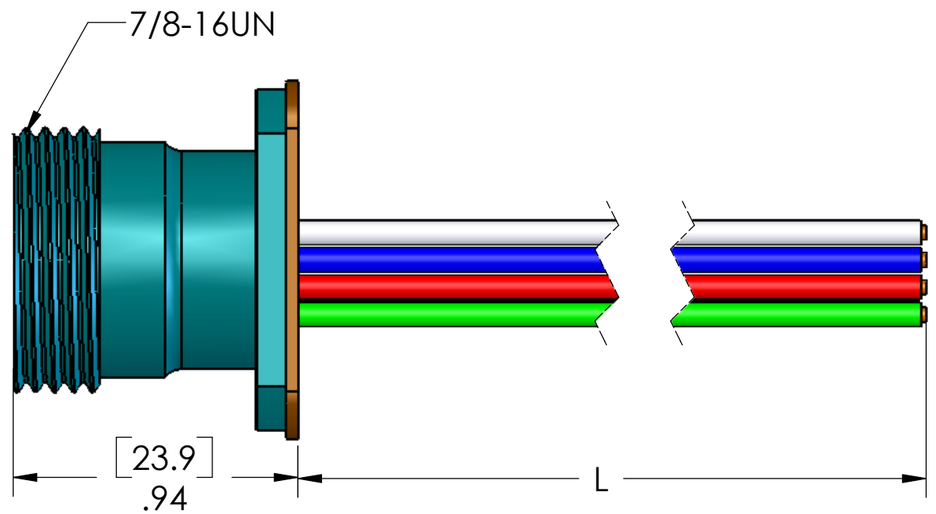


TABLE A		
P/N	L	STD?
MIN-6FR-1-18-PM	12"	YES
MIN-6FR-2-18-PM	24"	NO
MIN-6FR-3-18-PM	36"	YES
MIN-6FR-4-18-PM	48"	NO
MIN-6FR-5-18-PM	60"	NO
MIN-6FR-6-18-PM	72"	YES
MIN-6FR-8-18-PM	84"	NO
MIN-6FR-10-18-PM	120"	NO
MIN-6FR-12-18-PM	144"	NO
MIN-6FR-15-18-PM	180"	NO
MIN-6FR-20-18-PM	240"	NO

PARTS SHOWN AS NOT BEING STANDARD MAY REQUIRE MINIMUM ORDERS

MATERIALS	
BODY:	BLUE ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
INSERT:	YELLOW PVC
WIRE:	18AWG UL1007
GASKET:	NBR

APPROVALS	
U.S.	UL RECOGNIZED
CANADA	C-UL RECOGNIZED

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

SPECIFICATIONS	
VOLTS	300V
AMPS	5.5A
TEMP	105°C

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]
MATERIAL
FINISH
DO NOT SCALE DRAWING

	NAME
DRAWN	BEM
CHECKED	
ENG APPR.	
MFG APPR.	
Q.A.	

COMMENTS:

MENCOM CORPORATION

TITLE:

SIZE	DWG. NO.	REV
B	MIN-6FR-ZZ-18-PM	A

SCALE: 2:1 | WEIGHT: | SHEET 1 OF 1