


PIN #	COLOR
1	ORANGE
2	BLUE
3	BLACK
4	WHITE
5	RED
6	GREEN/YELLOW

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDERAWN IN SW	8/4/2005	

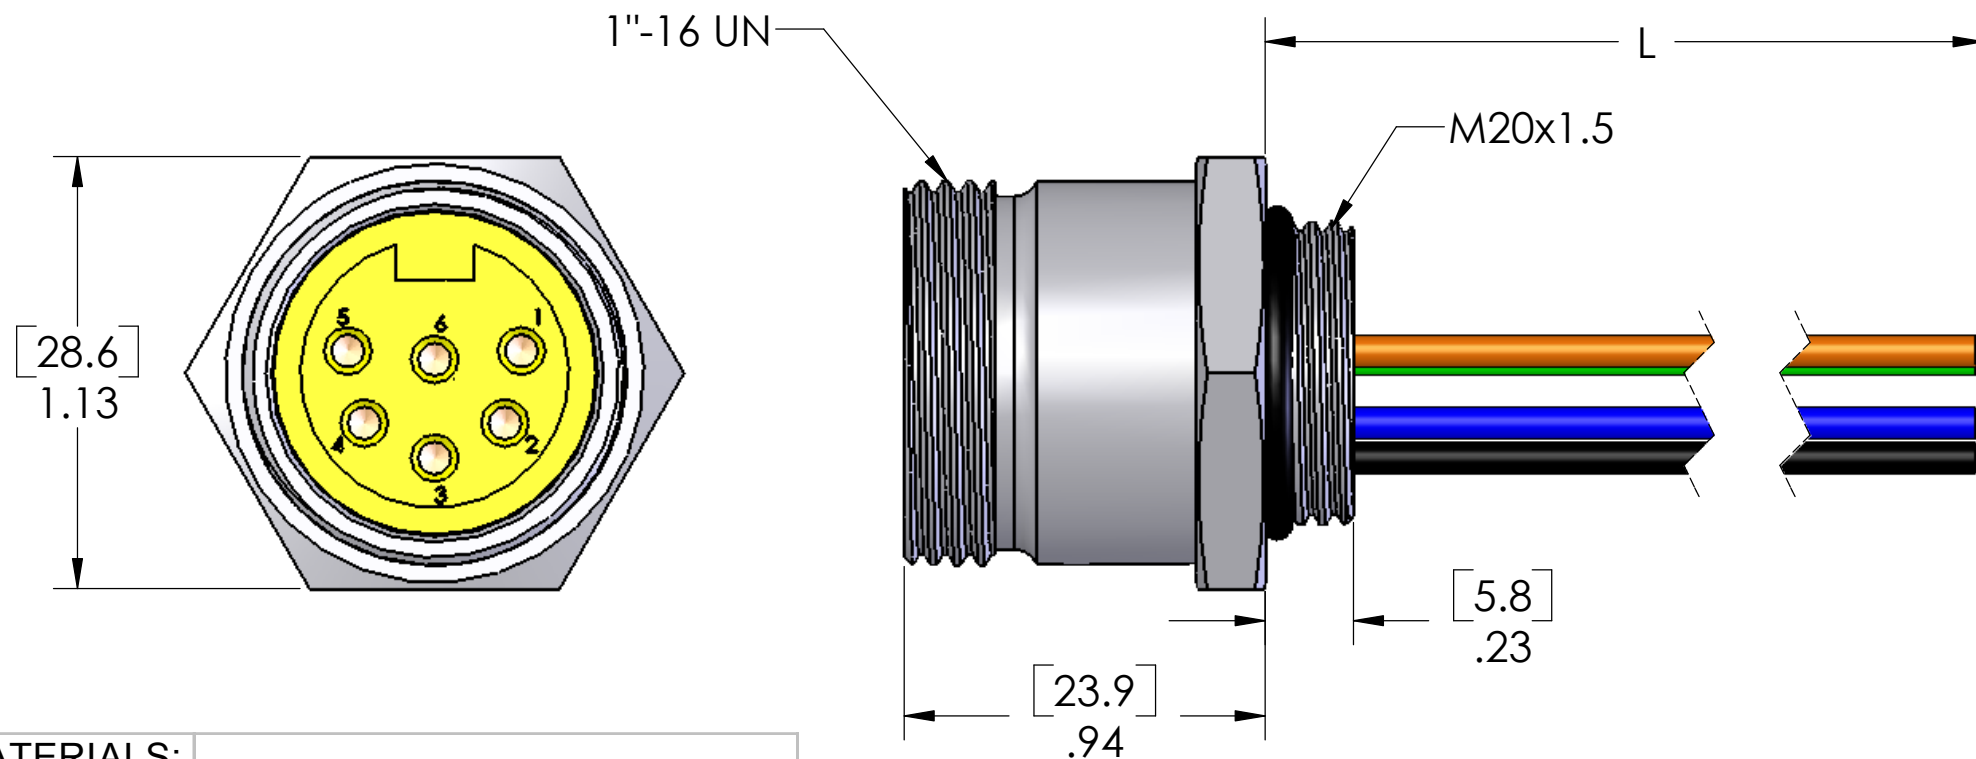

P/N	L	TOL
MIN-6FR2-.5-18-M20	6"	NO
MIN-6FR2-1-18-M20	12"	YES
MIN-6FR2-2-18-M20	24"	NO
MIN-6FR2-3-18-M20	36"	YES
MIN-6FR2-4-18-M20	48"	NO
MIN-6FR2-5-18-M20	60"	NO
MIN-6FR2-6-18-M20	72"	YES
MIN-6FR2-8-18-M20	96"	NO
MIN-6FR2-10-18-M20	120"	NO

MATERIALS:	
BODY:	CLEAR ANODIZED ALUMINUM
INSERT:	YELLOW PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
WIRE:	18AWG UL1007
O-RING:	BUNA-N

APPROVALS:	
US	UL RECOGNIZED
CANADA	C-UL RECOGNIZED

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	300V
AMPS	5.5A
TEMP	105°C
SPECIFICATIONS	

UNLESS OTHERWISE SPECIFIED:		NAME	MENCOM CORPORATION					
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	DWM				TITLE:		
	CHECKED							
	ENG APPR.							
	MFG APPR.							
	Q.A.							
MATERIAL	COMMENTS:	SIZE	DWG. NO.		REV			
FINISH		B	MIN-6FR2-ZZ-18-M20		A			
DO NOT SCALE DRAWING		SCALE: 2:1	WEIGHT:		SHEET 1 OF 1			

PARTS LISTED AS NOT BEING STANDARD
MAY REQUIRE MINIMUM ORDERS