

PIN #	WIRING	PIN #
1	-----	1
2	-----	2
3	-----	3
4	-----	4
5	-----	5
	ETC.	
9	-----	9

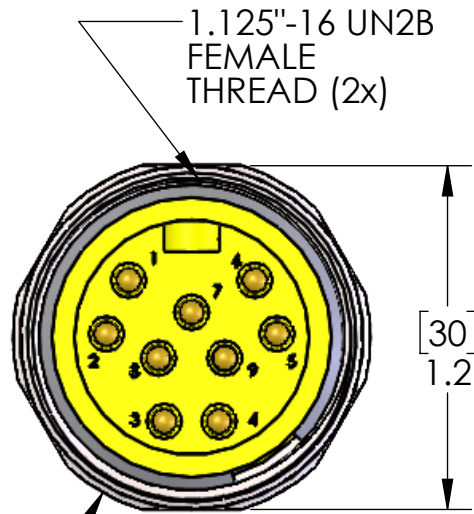
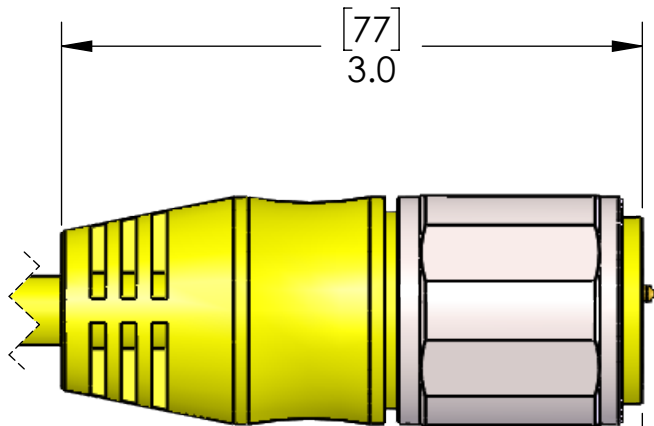
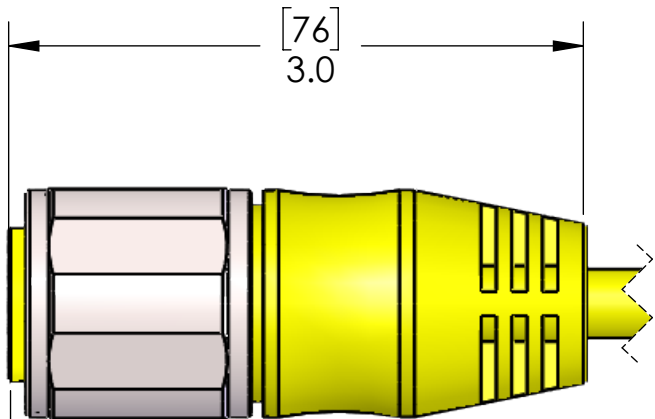
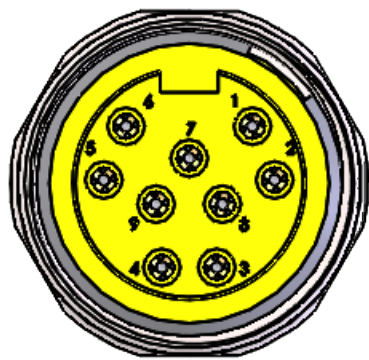


TABLE A		
P/N	L	STD?
MIN-9MFPX-3-SS	36" [0.9m]	YES
MIN-9MFPX-6-SS	72" [1.8m]	YES
MIN-9MFPX-12-SS	144" [3.7m]	YES
MIN-9MFPX-20-SS	240" [6.1m]	YES
MIN-9MFPX-30-SS	360" [9.1m]	YES
MIN-9MFPX-40-SS	480" [12.2m]	NO
MIN-9MFPX-50-SS	600" [15.2m]	YES
MIN-9MFPX-60-SS	720" [18.3m]	NO
MIN-9MFPX-80-SS	960" [24.4m]	NO
MIN-9MFPX-100-SS	1200" [30.5m]	NO

PARTS LISTED AS NOT BEING STANDARD
MAY HAVE MINIMUM ORDER QUANTITIES

MATERIALS	
BODY:	YELLOW PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	18/9 YELLOW PVC JACKET
COUPLING:	STAINLESS STEEL

APPROVALS:	
US	UL LISTED
CANADA	C-UL LISTED

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]	DRAWN BY	JJH
	DRAWN DATE	05/29/2019
	CHECKED BY	ADM
	CHECK DATE	05/29/2019
	COMMENTS:	
MATERIAL		
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION		
TITLE:		
SIZE	DWG. NO.	REV
B	MIN-9MFPX-ZZ-SS	A
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1