


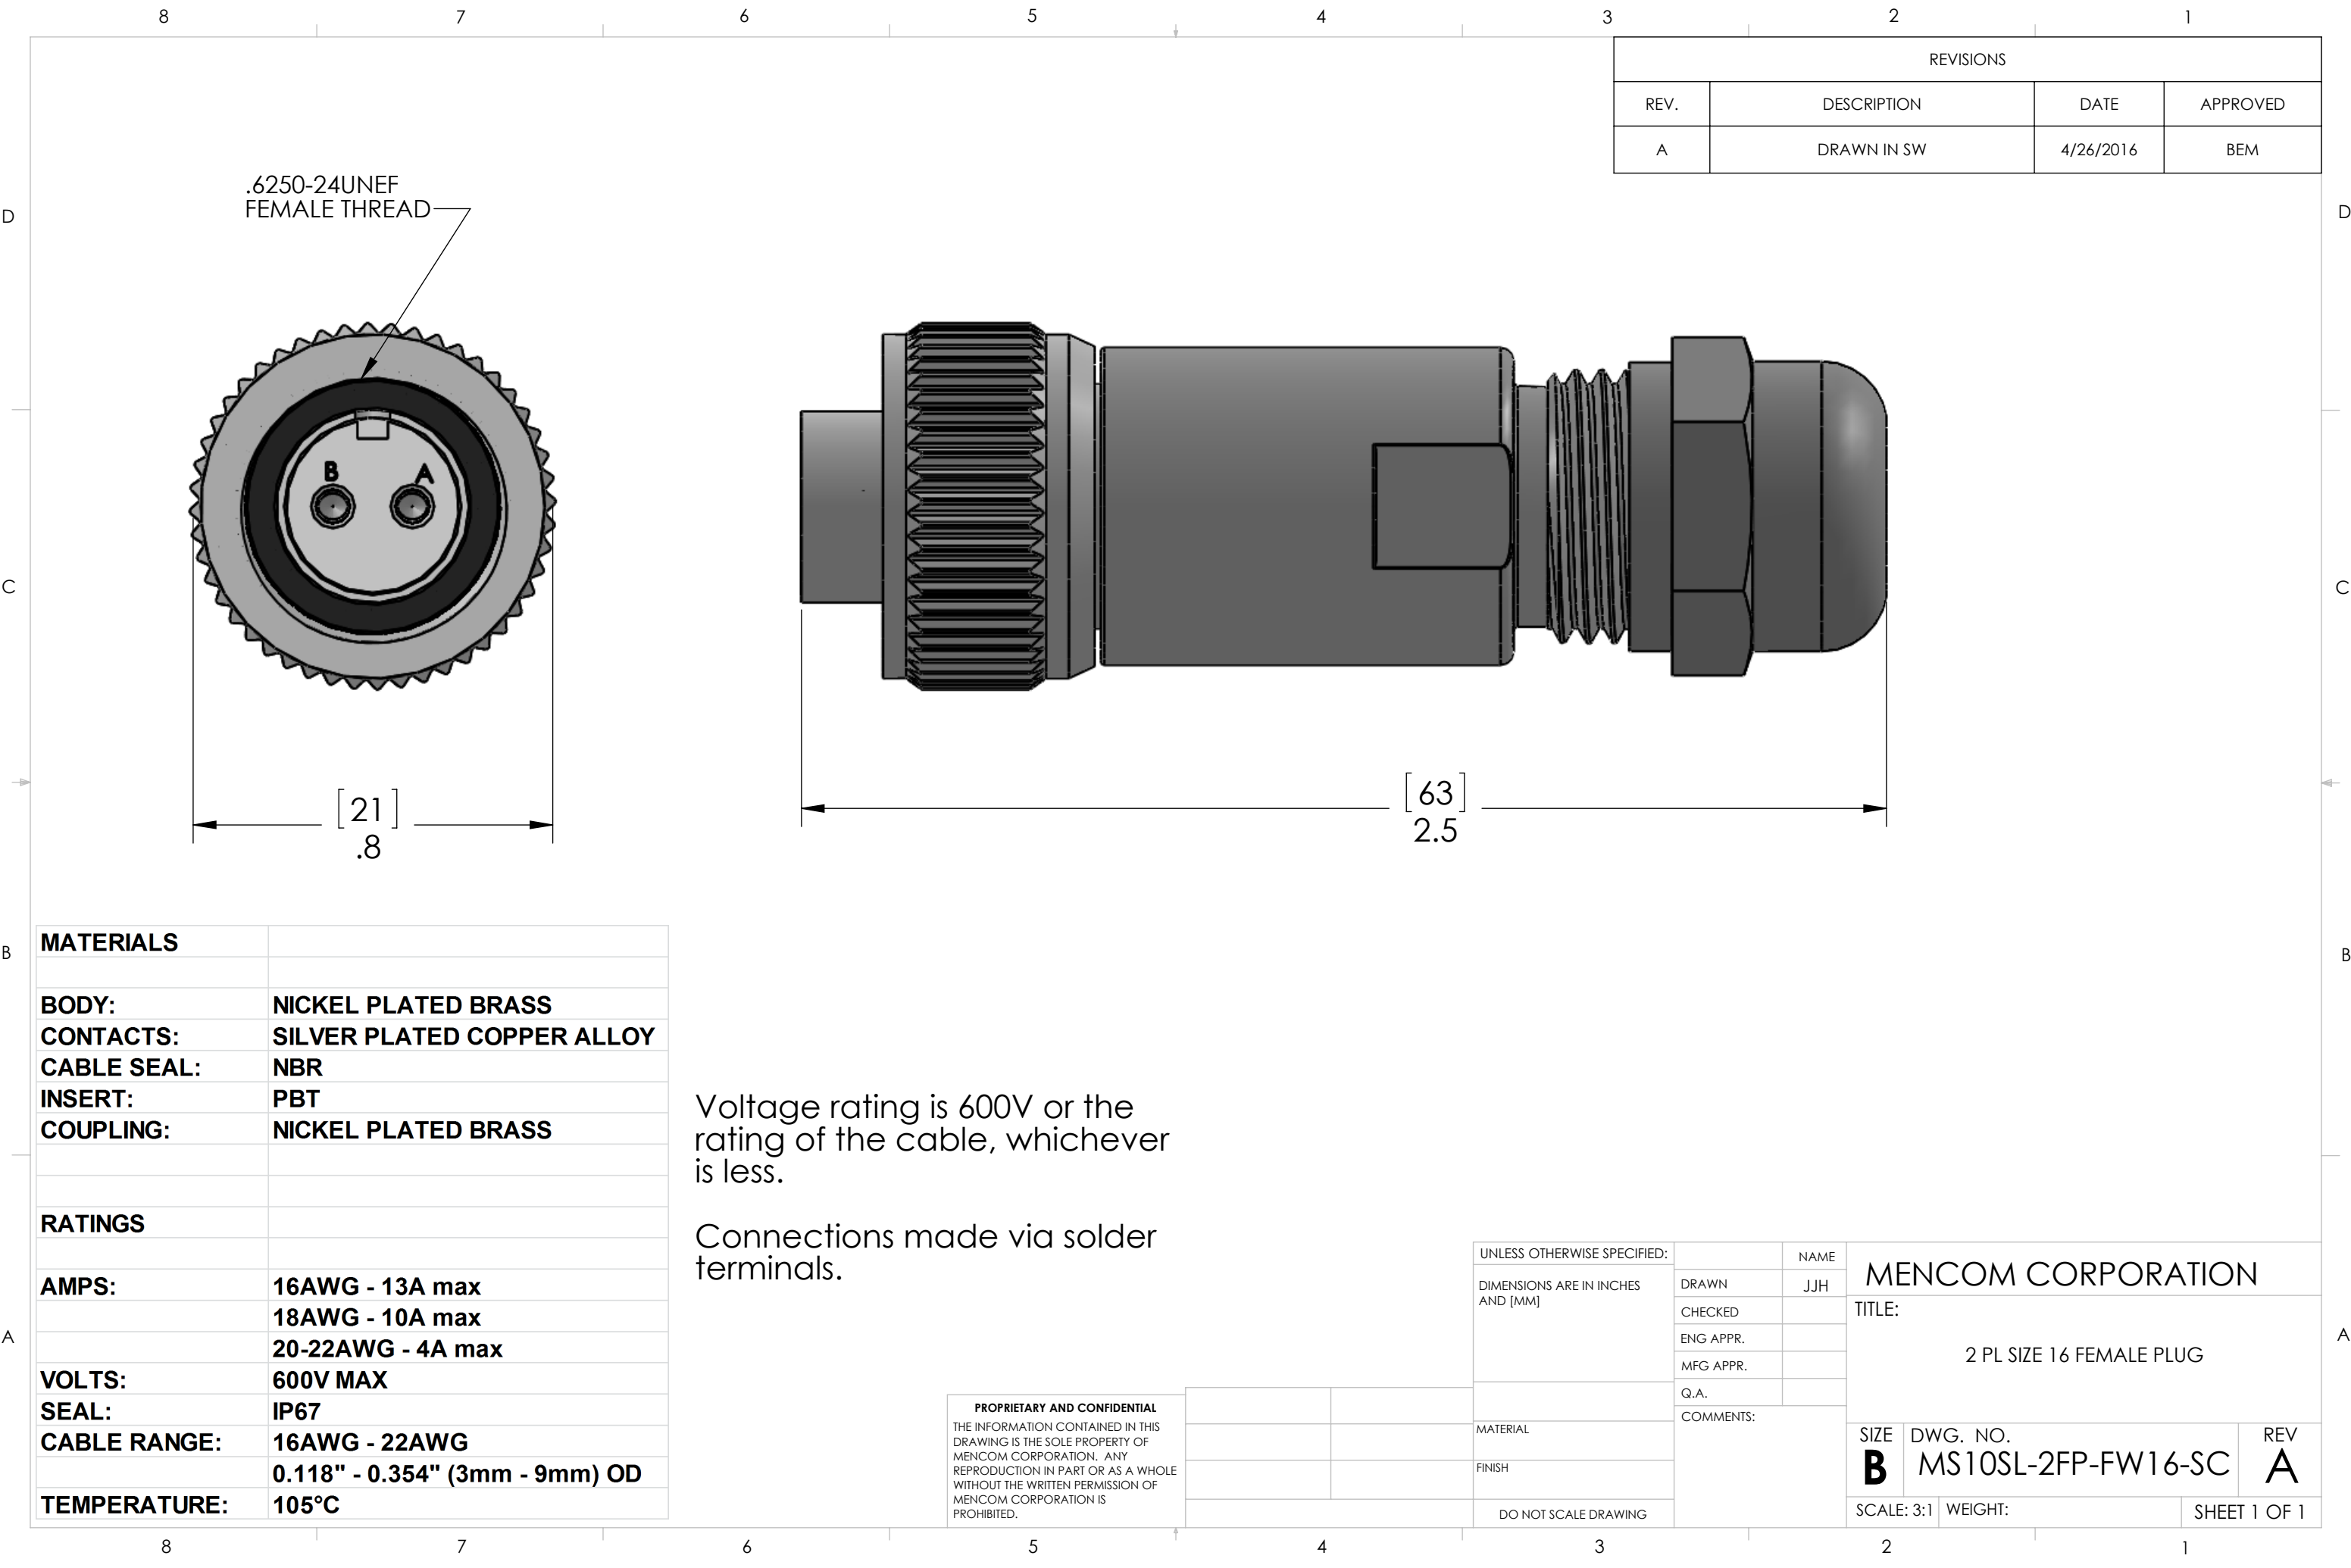

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	DRAWN IN SW	4/26/2016	BEM

MATERIALS	
BODY:	NICKEL PLATED BRASS
CONTACTS:	SILVER PLATED COPPER ALLOY
CABLE SEAL:	NBR
INSERT:	PBT
COUPLING:	NICKEL PLATED BRASS
RATINGS	
AMPS:	16AWG - 13A max 18AWG - 10A max 20-22AWG - 4A max
VOLTS:	600V MAX
SEAL:	IP67
CABLE RANGE:	16AWG - 22AWG 0.118" - 0.354" (3mm - 9mm) OD
TEMPERATURE:	105°C

Voltage rating is 600V or the rating of the cable, whichever is less.

Connections made via solder terminals.

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	MENCOM CORPORATION		
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	JJH	TITLE: 2 PL SIZE 16 FEMALE PLUG		
	CHECKED				
	ENG APPR.				
	MFG APPR.				
MATERIAL	Q.A.		SIZE B		
	COMMENTS:				
FINISH			DWG. NO.	REV	
			MS10SL-2FP-FW16-SC	A	
DO NOT SCALE DRAWING			SCALE: 3:1	WEIGHT:	SHEET 1 OF 1