


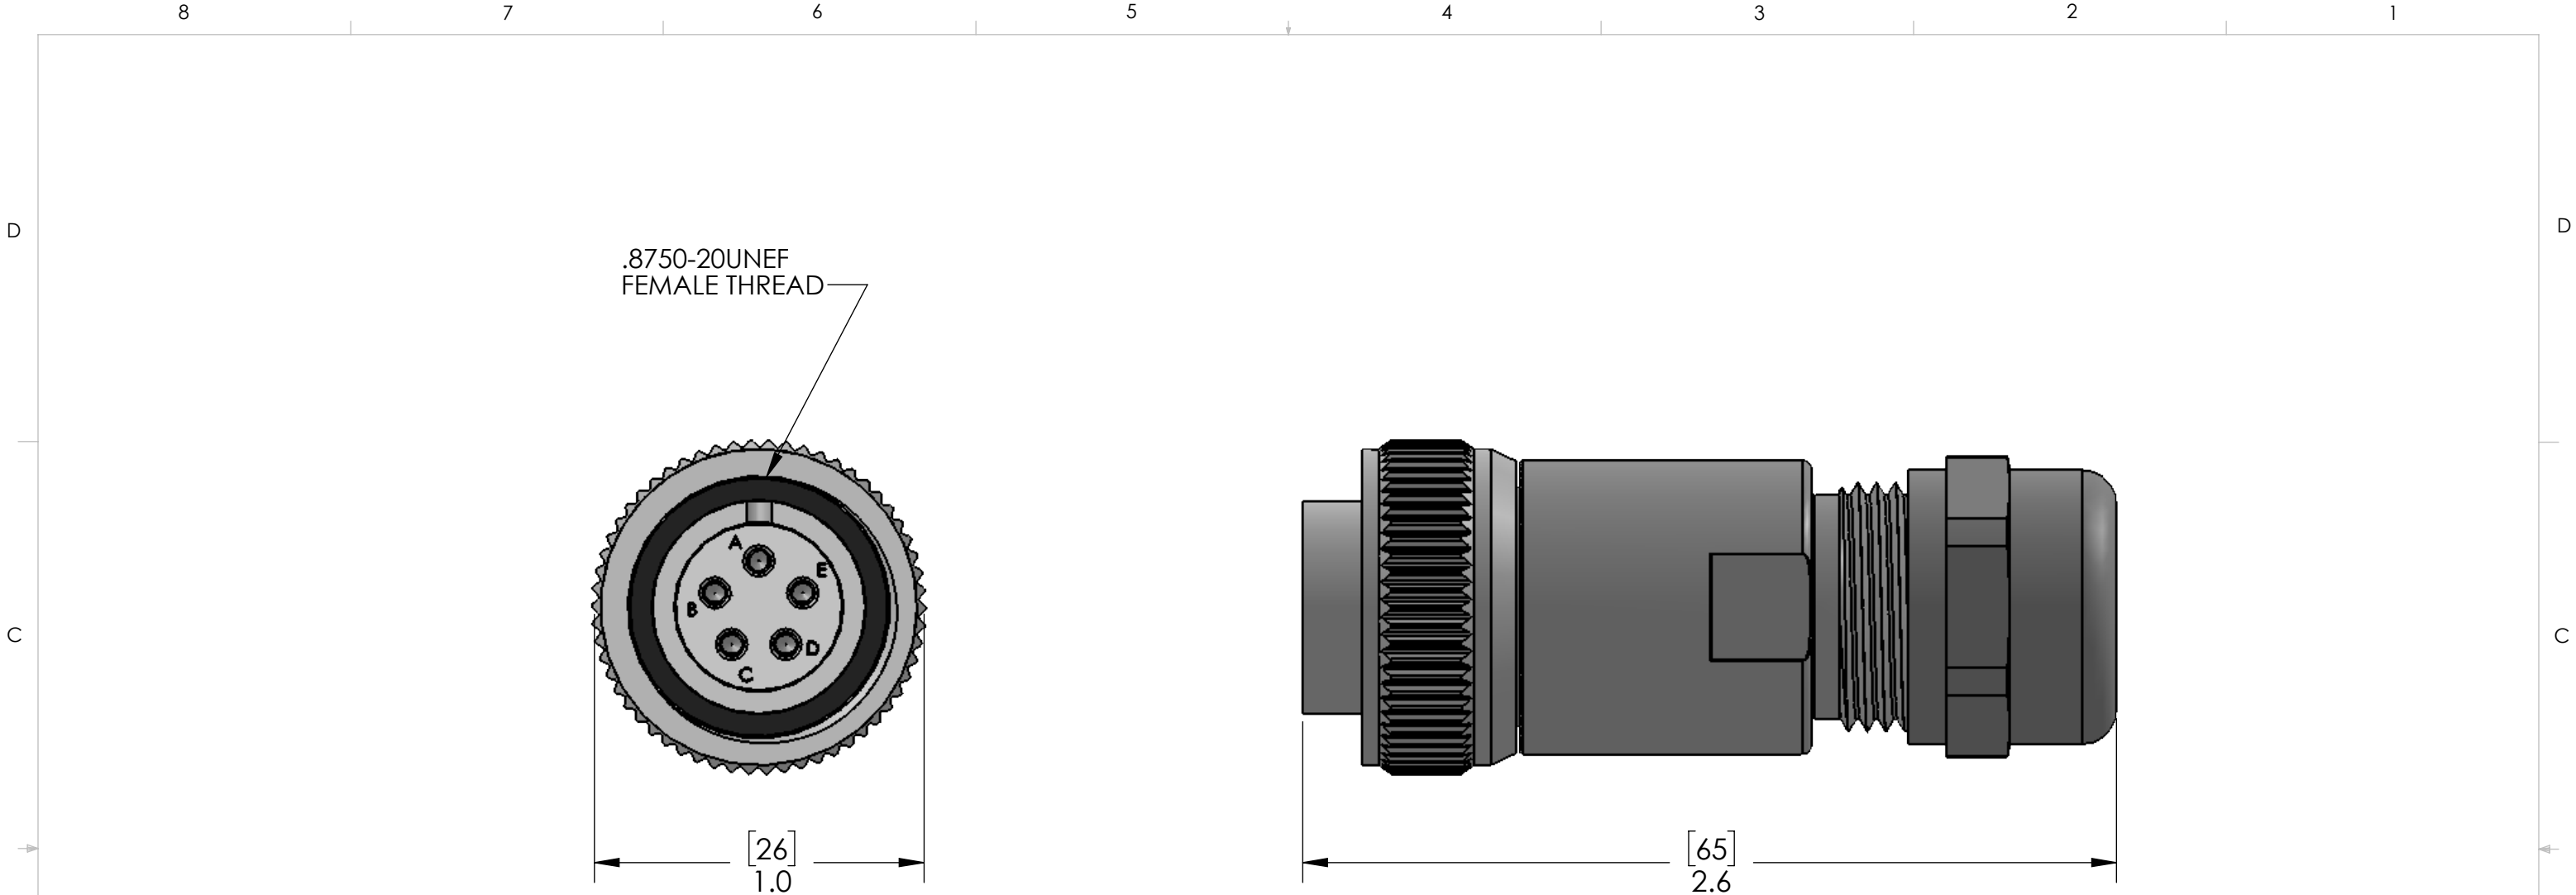

MATERIALS	
BODY:	NICKEL PLATED BRASS
CONTACTS:	SILVER PLATED COPPER ALLOY
CABLE SEAL:	NBR
INSERT:	PBT
COUPLING:	NICKEL PLATED BRASS
RATINGS	
AMPS:	16AWG - 8A max
	18AWG - 5.5A max
	20-22AWG - 4A max
VOLTS:	600V MAX
SEAL:	IP67
CABLE RANGE:	16AWG - 22AWG
	0.232" - 0.472" (6mm - 12mm) OD
TEMPERATURE:	105°C

Voltage rating is 600V or the rating of the cable, whichever is less.

Connections made via solder terminals.

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]	DRAWN BY	JJH	MENCOM CORPORATION		
	DRAWN DATE	12/22/2016	TITLE:		
	CHECKED BY	BEM	5 PL SIZE 14 FEMALE PLUG		
	CHECK DATE	12/28/2016			
	COMMENTS:		SIZE	DWG. NO.	REV
MATERIAL			B	MS14S-5FP-FW20-SC	A
FINISH			SCALE: 2:1	WEIGHT:	SHEET 1 OF 1
DO NOT SCALE DRAWING					