

	WIRING	
MALE		FEMALE
1	-----	1
3	-----	3
4	-----	4

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	4/19/2007	

D

D

C


C

B

B

A


A

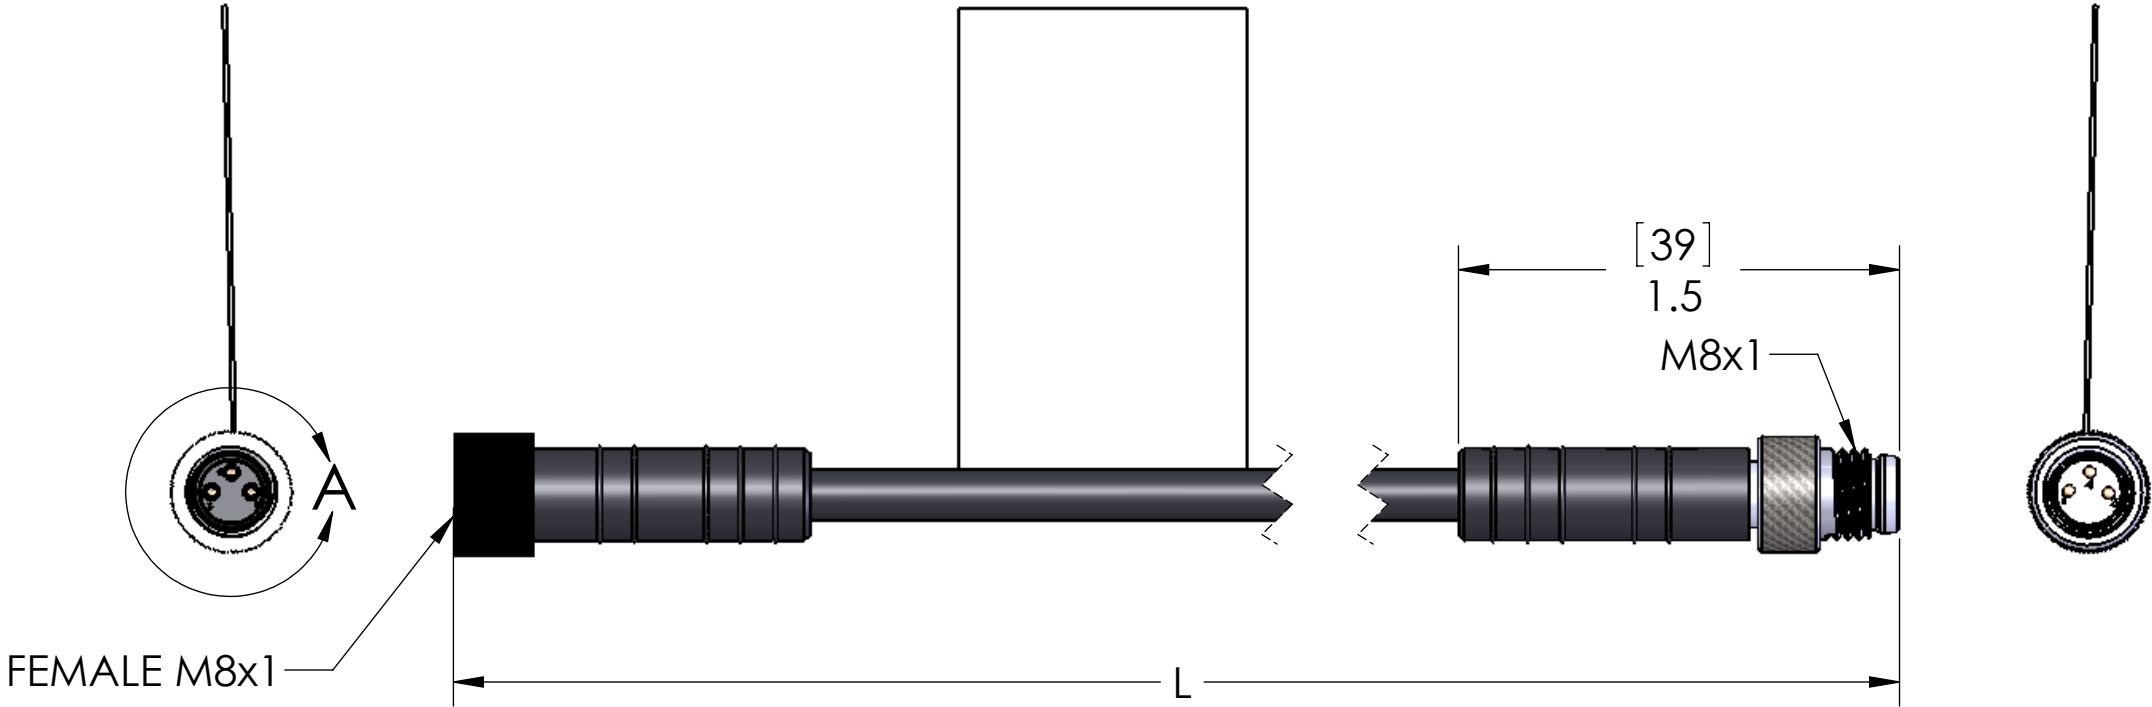

P/N	L	STD?
NAN-T-3MFP-0.5M	0.5M	NO
NAN-T-3MFP-1M	1.0M	YES
NAN-T-3MFP-2M	2.0M	YES
NAN-T-3MFP-3M	3M	YES
NAN-T-3MFP-4M	4M	YES
NAN-T-3MFP-5M	5M	YES
NAN-T-3MFP-6M	6M	NO
NAN-T-3MFP-10M	10M	YES
NAN-T-3MFP-15M	15M	NO
NAN-T-3MFP-20M	20M	NO
NAN-T-3MFP-30M	30M	NO

PARTS LISTED AS NOT BEING STANDARD
MAY HAVE MINIMUM ORDER QUANTITIES

MATERIALS:	
BODIES:	BLACK PVC
INSERTS:	POLYAMIDE
CONTACTS:	GOLD PLATED COPPER ALLOYO
COUPLING:	NICKEL PLATED BRASS
O-RING:	NBR
CABLE:	24/3 AWM 2661

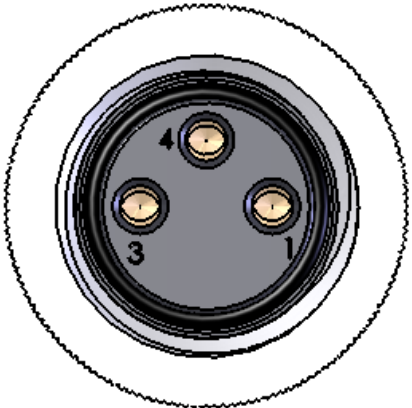

DETAIL A
SCALE 5 : 1

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	60V
AMPS	4A
TEMP	105°C
SPECIFICATIONS	

UNLESS OTHERWISE SPECIFIED:		NAME
DIMENSIONS ARE IN INCHES	DRAWN	BEM
	CHECKED	
	ENG APPR.	
	MFG APPR.	
	Q.A.	
	COMMENTS:	
MATERIAL		
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION		
TITLE:		
SIZE	DWG. NO.	REV
B	NAN-T-3MFP-ZZ	A
SCALE: 3:2	WEIGHT:	SHEET 1 OF 1