


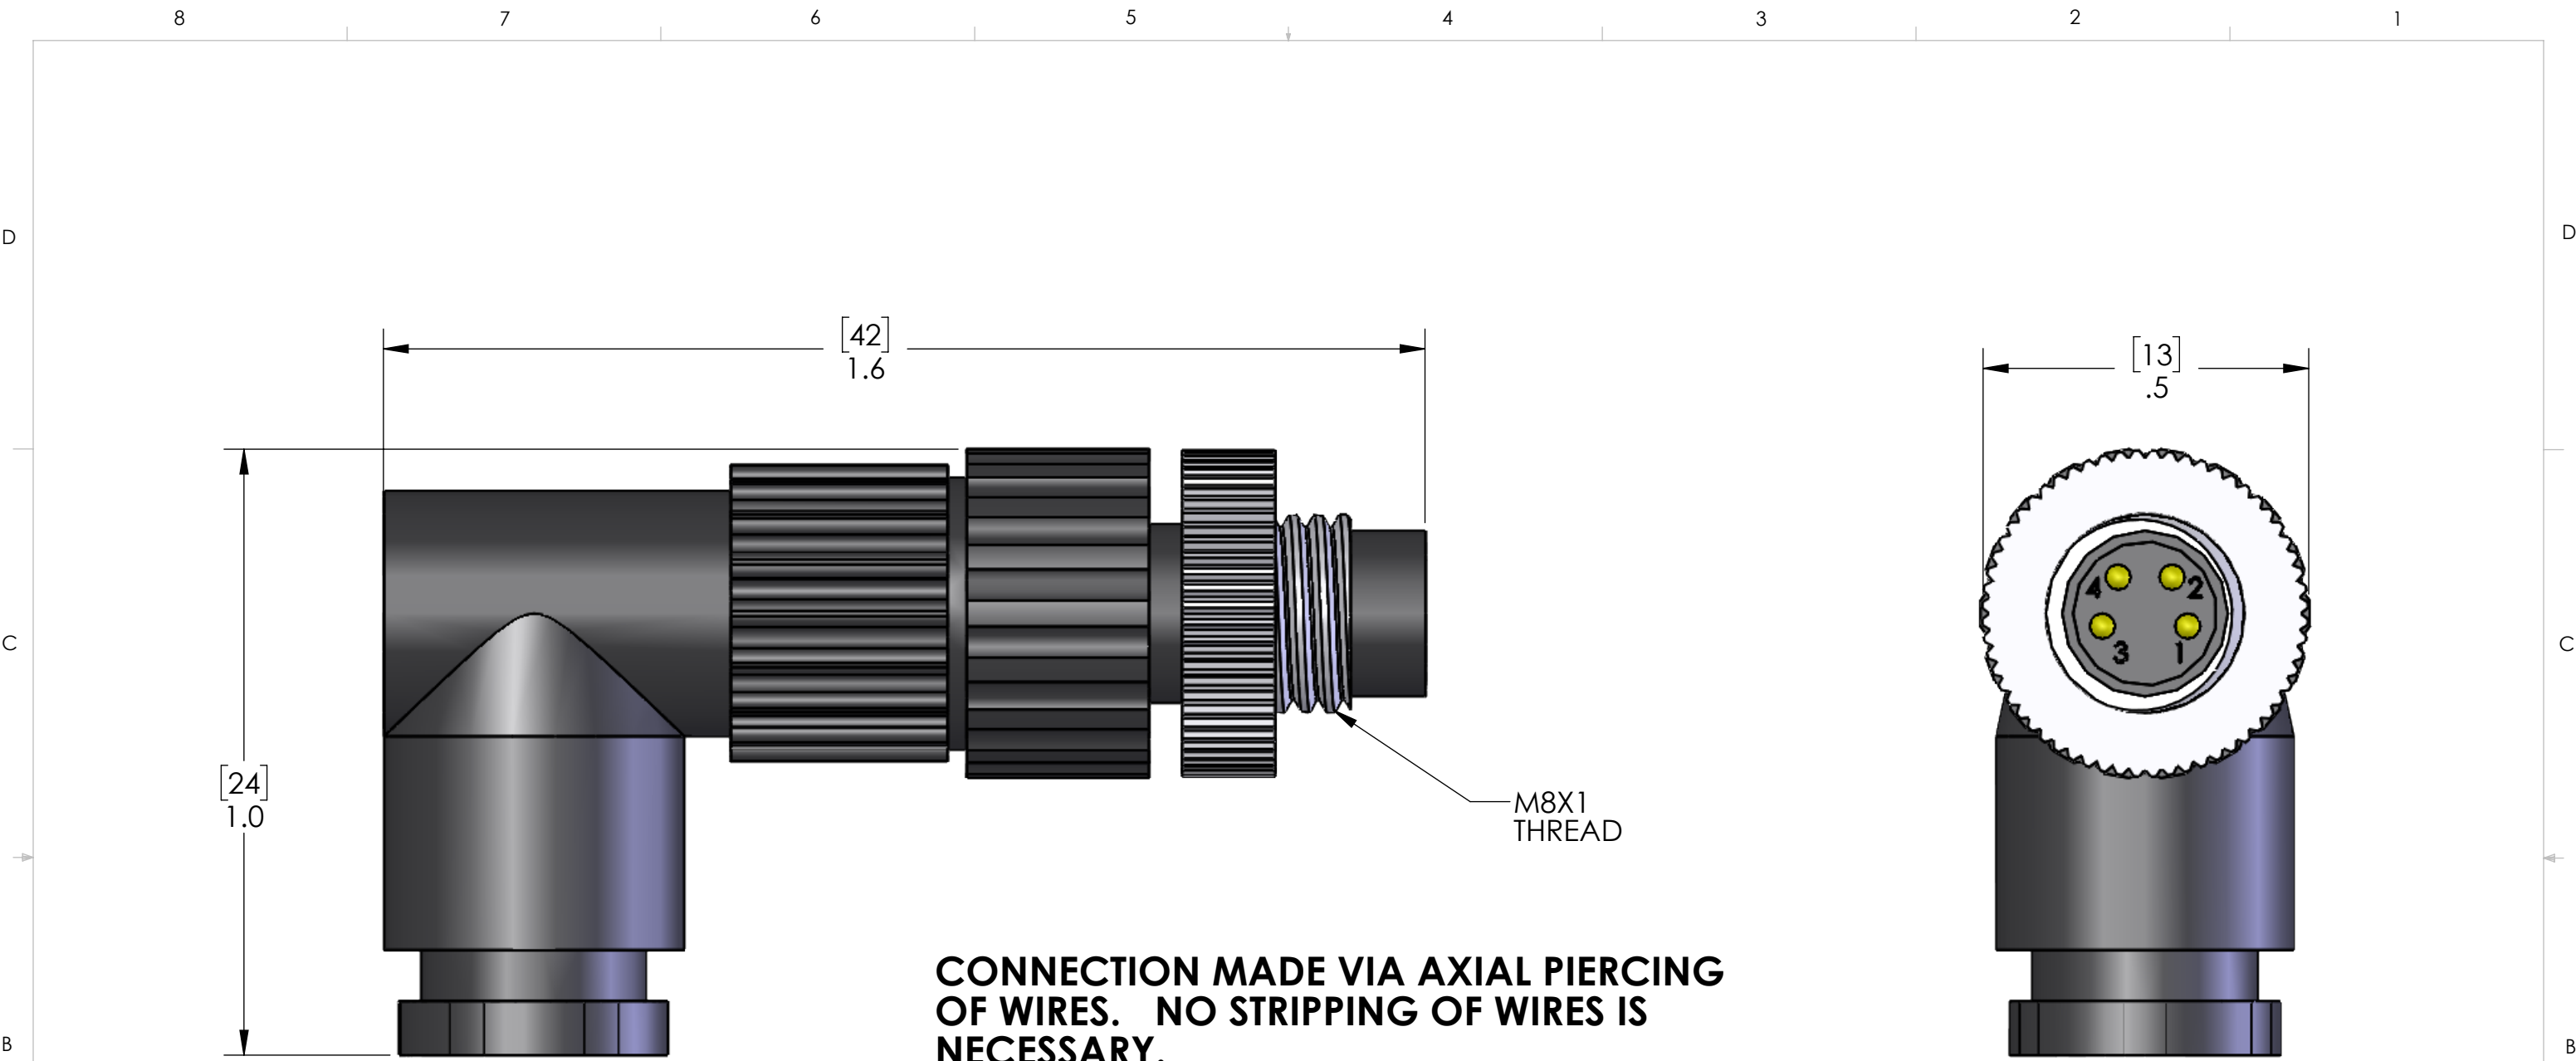

CONNECTION MADE VIA AXIAL PIERCING
OF WIRES. NO STRIPPING OF WIRES IS
NECESSARY.
WIRE O.D. RANGE: 1.0MM - 1.55MM
CABLE O.D. RANGE: 4-5MM

MATERIALS	
BODY:	POLYAMIDE
CONTACTS:	GOLD PLATED COPPER ALLOY
COUPLING:	NICKEL PLATED ZINC DIECAST
INSERT:	POLYAMIDE
RATINGS:	
SEAL:	IP67
WIRE RANGE:	0.14 - .034 sqmm (2A rating for 0.14)
CONTACT RESISTANCE:	6 Ohms max

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	30V
AMPS	3A
TEMP:	70°C

UNLESS OTHERWISE SPECIFIED:	DRAWN BY	JJH
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN DATE	11/20/2019
	CHECKED BY	ADM
	CHECK DATE	11/20/2019
	COMMENTS:	
MATERIAL		
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION		
TITLE:		
SIZE	DWG. NO.	REV
B	NAN-T-4MP-FW-R	A
SCALE: 4:1	WEIGHT:	SHEET 1 OF 1