




# Profibus-DP Series Field Wireable Plugs

5 Conductor Profibus-DP Series Field Wireable Plugs, 18-24AWG




Straight Field Wireable Plugs | Shielded | 50 Volt, 4 amps | IP67 Rating




| # of Poles | Male Faceview                                                                                | Rating    | Wire AWG | Cable O.D. Range | Part Number  |              |
|------------|----------------------------------------------------------------------------------------------|-----------|----------|------------------|--------------|--------------|
|            |                                                                                              |           |          |                  | Male Plugs   | Female Plugs |
| 5          | <br>M12 x 1 | 50V<br>4A | 18-24AWG | 3-9 mm           | PBECM-5MP-FW | PBECM-5FP-FW |

Connection via screw terminal. Voltage and amperage ratings are cable dependent and are based on 50V, 18 AWG cable. Cables with lower voltage ratings or smaller wire gauge will lower these ratings.

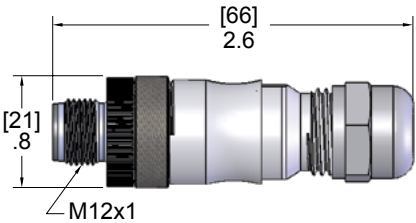

Male Straight with Male Threads

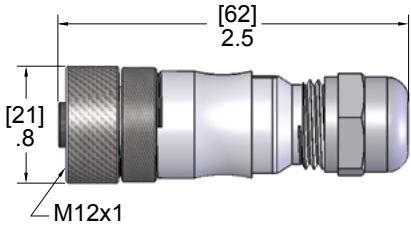

Female Straight with Female Threads



### Specifications:

- Body: Nickel Plated Brass
- Contacts: Copper Alloy with Gold Plating
- O-Ring: NBR
- Coupling Nut: Nickel Brass
- Insert: PVC
- Temperature: -40°C to +90°C (-40°F to +194°F)

Profibus-DP Series

N