


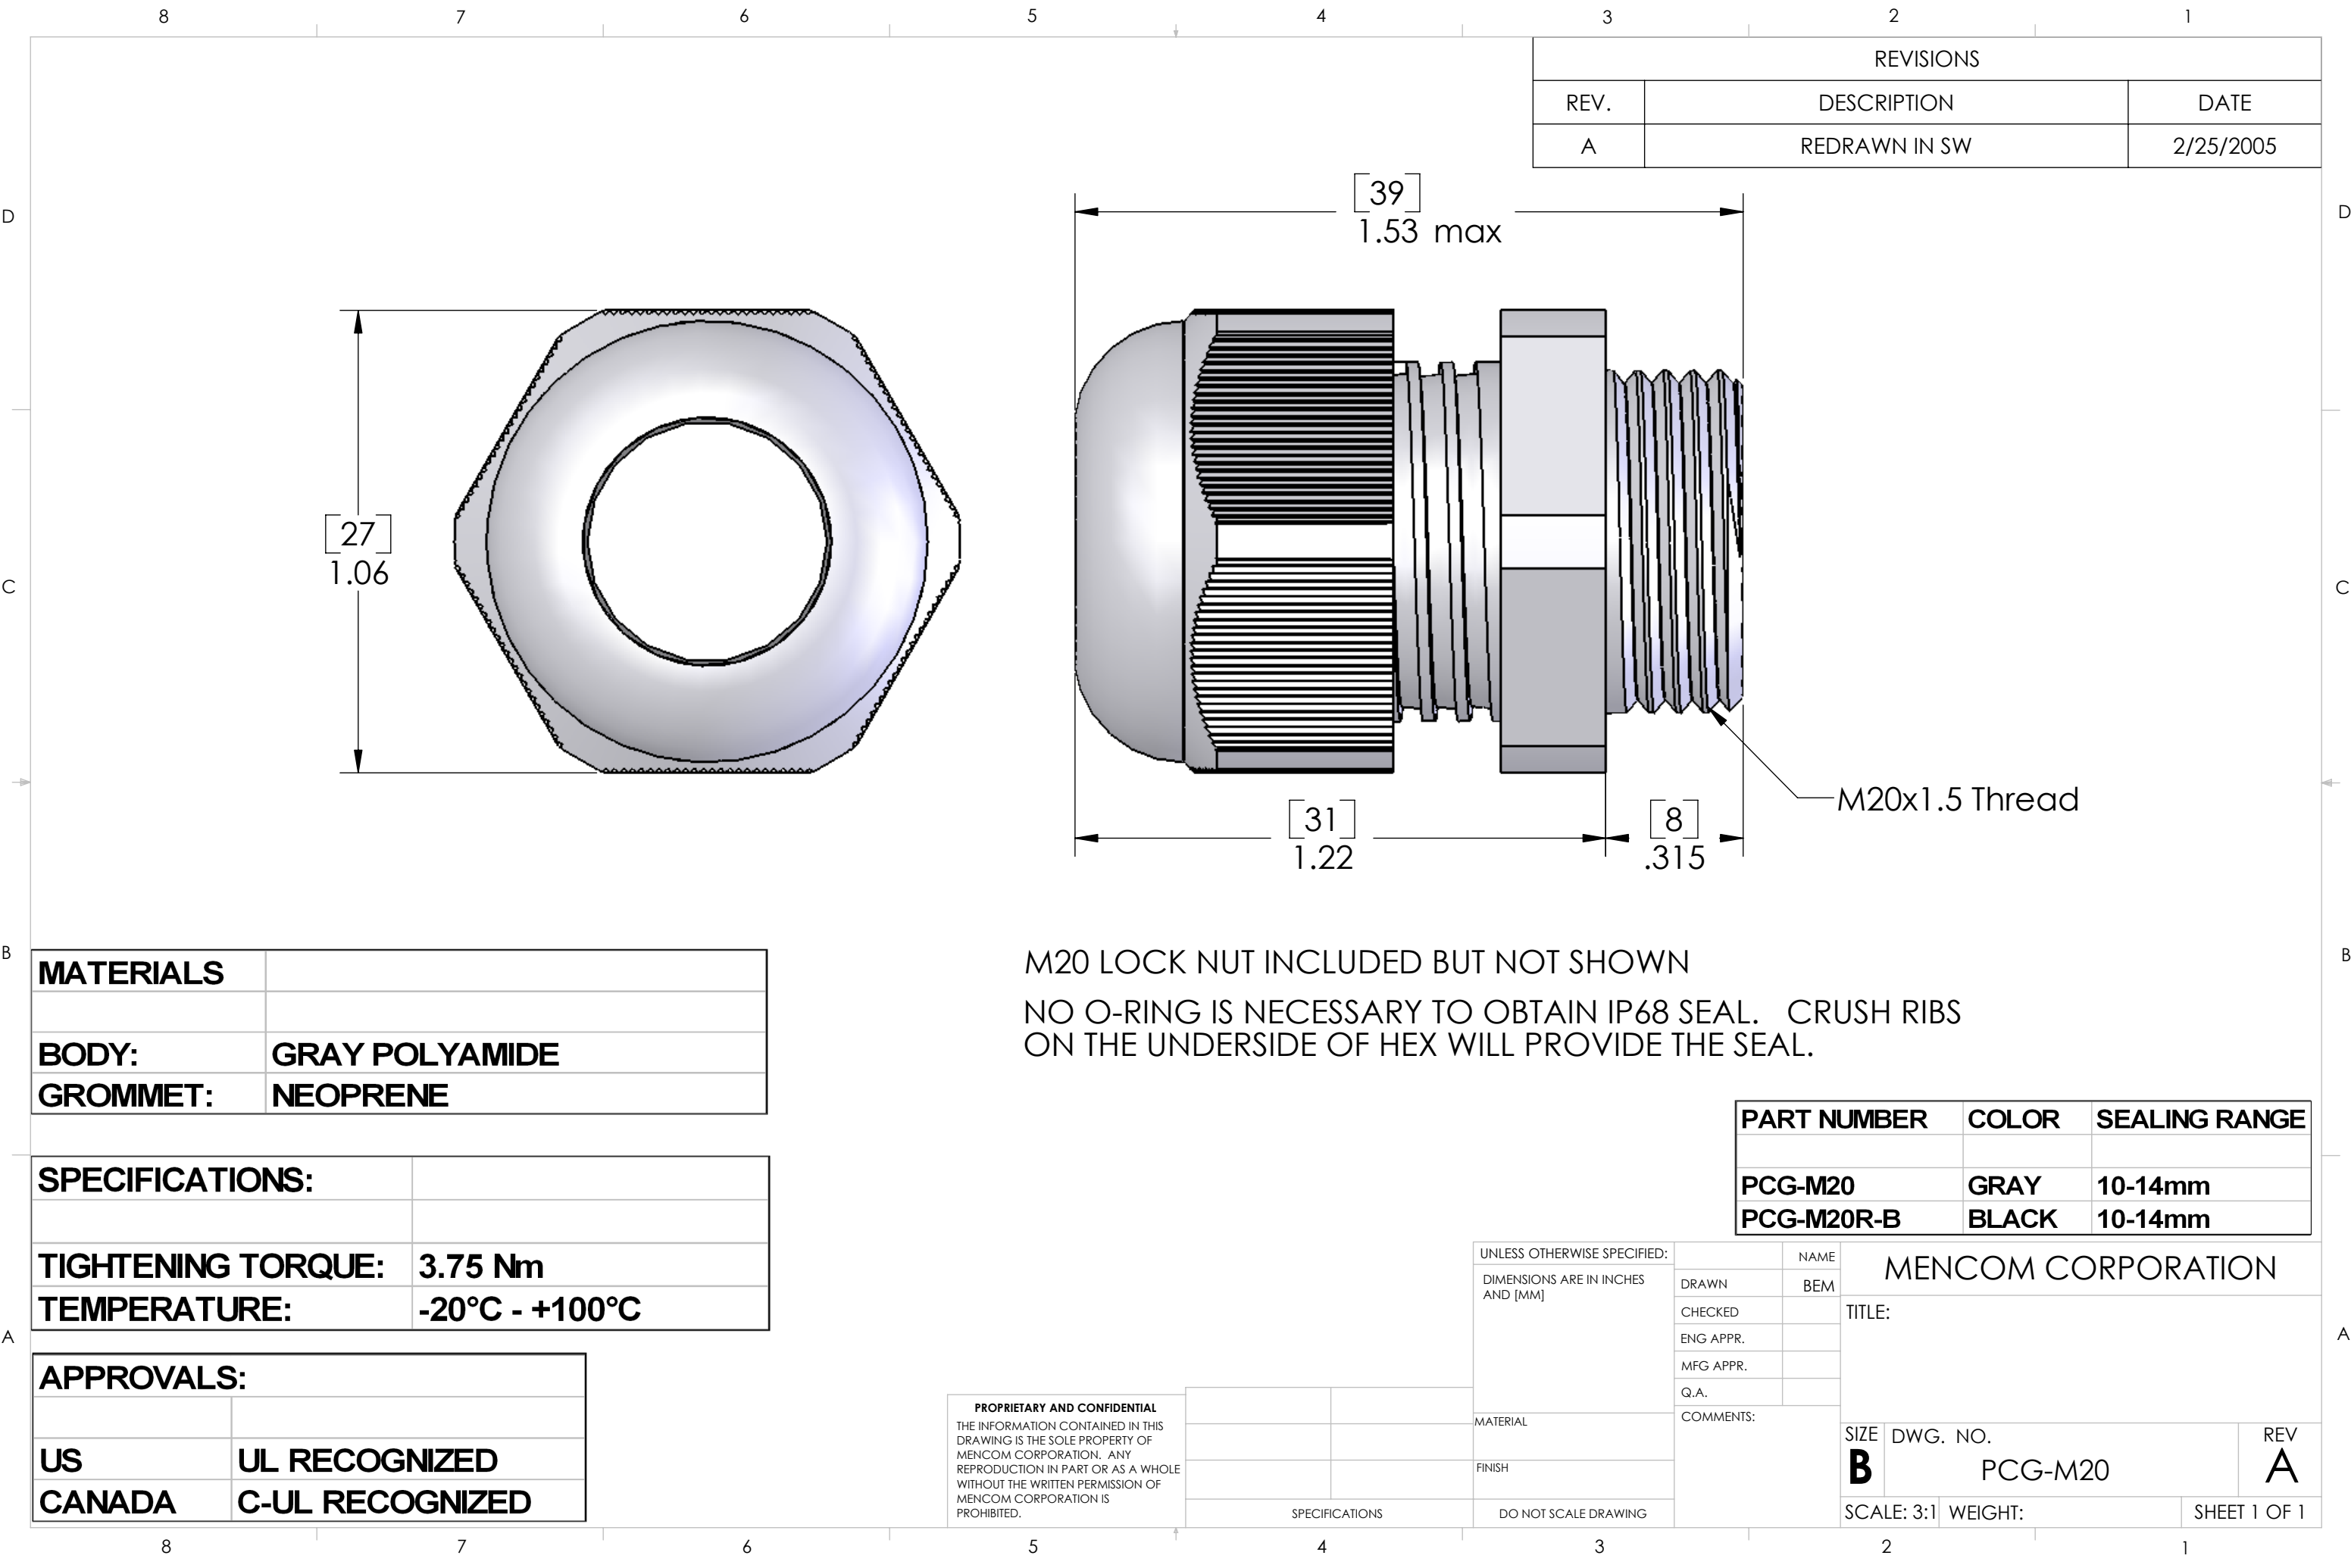

REVISIONS		
REV.	DESCRIPTION	DATE
A	REDRAWN IN SW	2/25/2005

MATERIALS	
BODY:	GRAY POLYAMIDE
GROMMET:	NEOPRENE

SPECIFICATIONS:	
TIGHTENING TORQUE:	3.75 Nm
TEMPERATURE:	-20°C - +100°C

APPROVALS:	
US	UL RECOGNIZED
CANADA	C-UL RECOGNIZED

M20 LOCK NUT INCLUDED BUT NOT SHOWN
NO O-RING IS NECESSARY TO OBTAIN IP68 SEAL. CRUSH RIBS
ON THE UNDERSIDE OF HEX WILL PROVIDE THE SEAL.

PART NUMBER	COLOR	SEALING RANGE
PCG-M20	GRAY	10-14mm
PCG-M20R-B	BLACK	10-14mm

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]	NAME	MENCOM CORPORATION	
	DRAWN	BEM	TITLE:
	CHECKED		
	ENG APPR.		
	MFG APPR.		
	Q.A.		
MATERIAL	COMMENTS:		SIZE DWG. NO. REV B PCG-M20 A
FINISH			
DO NOT SCALE DRAWING			
SPECIFICATIONS		SCALE: 3:1 WEIGHT:	SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.