
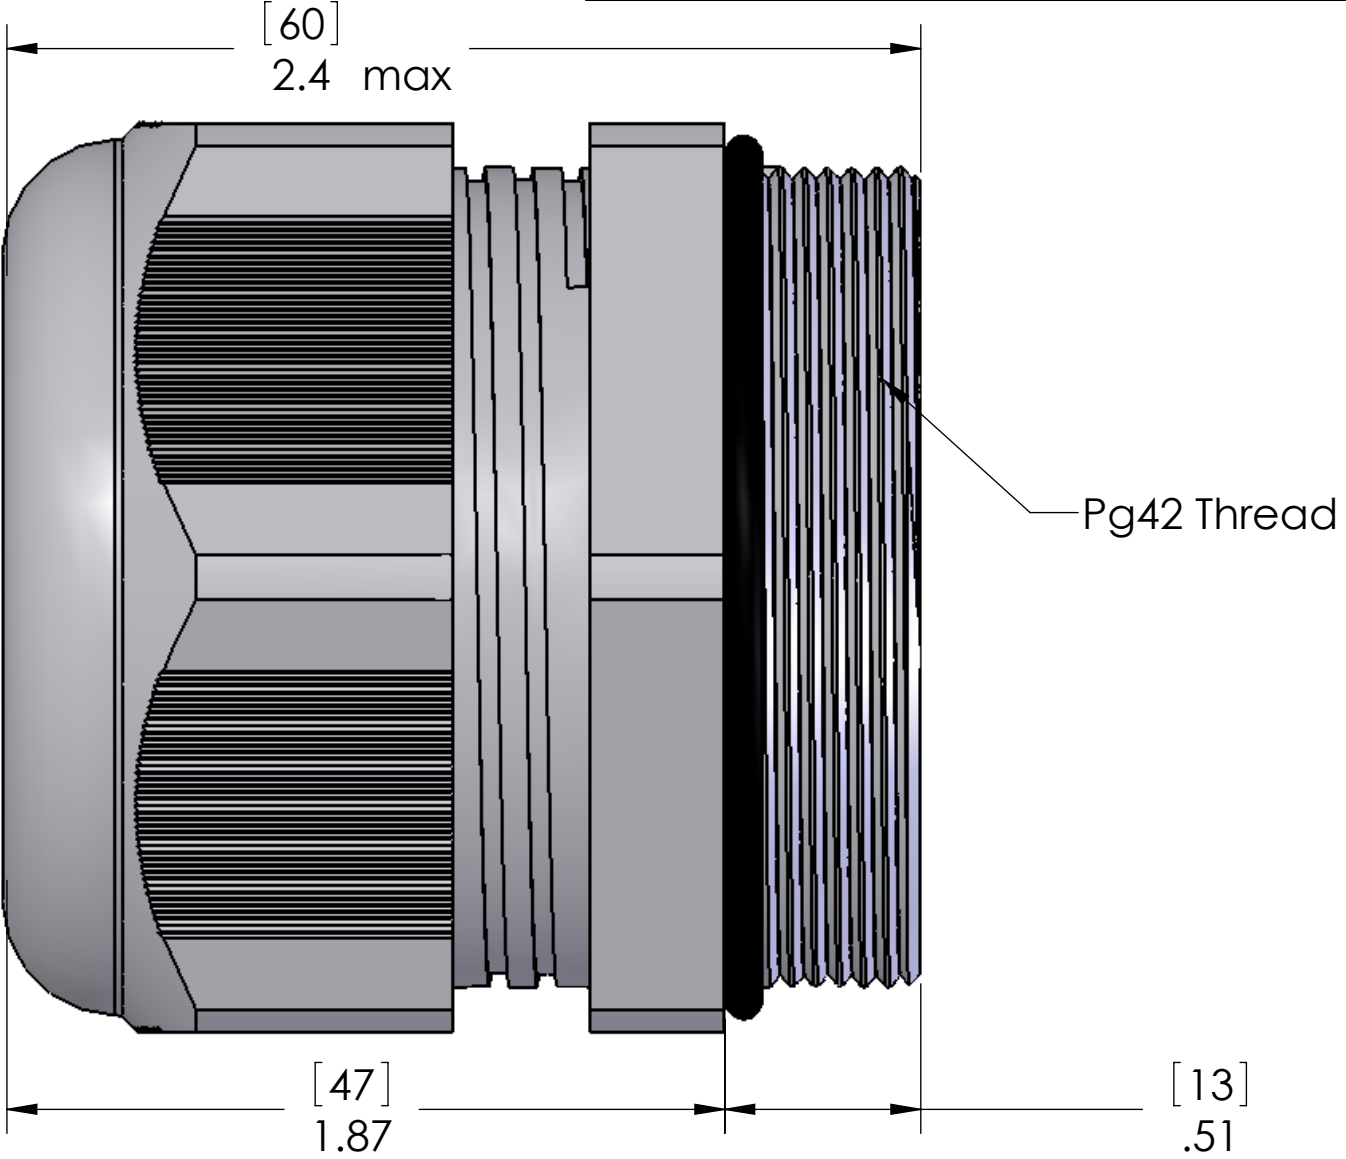


REVISIONS		
REV.	DESCRIPTION	DATE
A	REDRAWN IN SW	5/10/2006
B	REVISED	4/6/2015

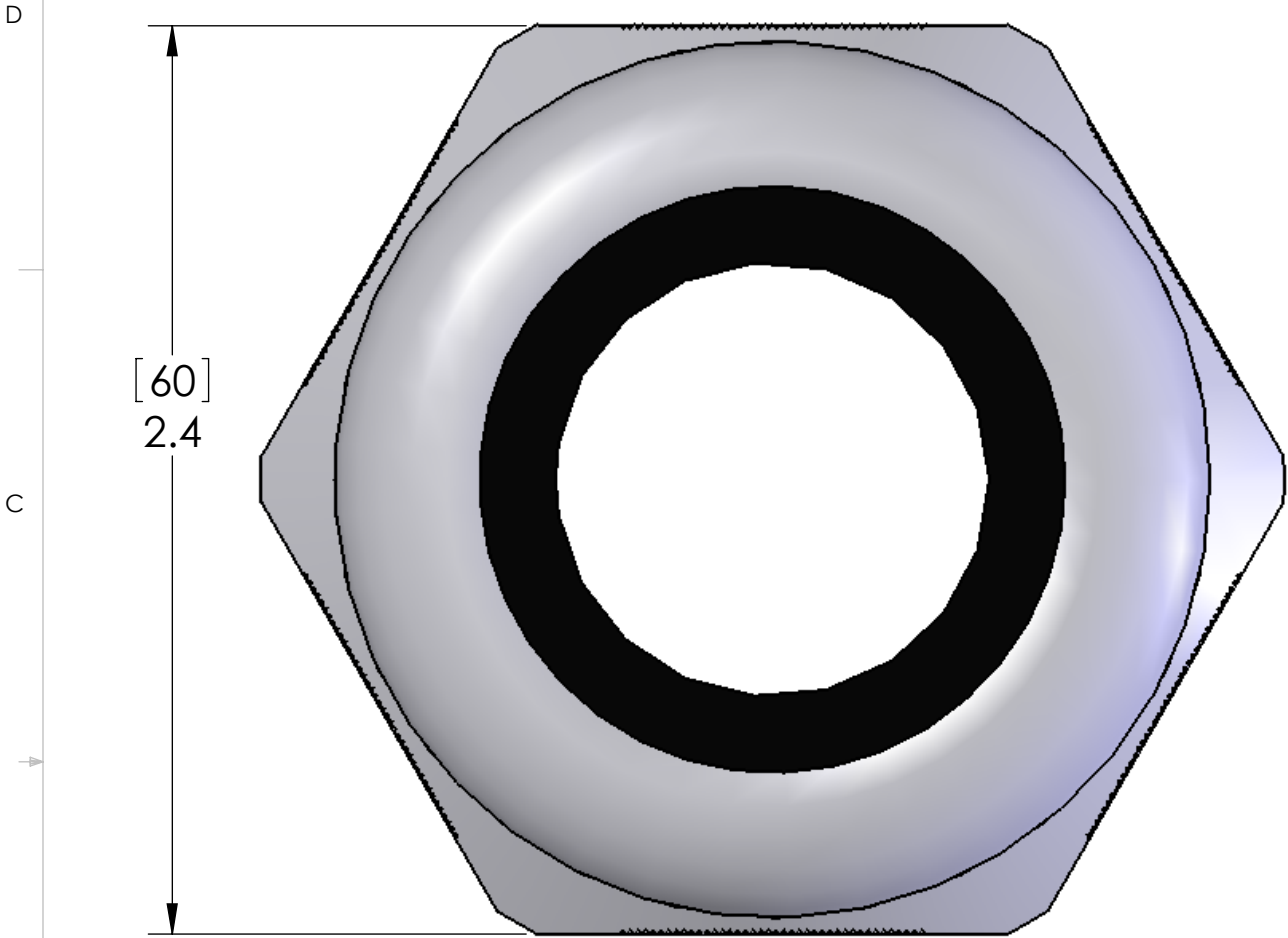

MATERIALS	
BODY:	GRAY OR BLACK POLYAMIDE
GROMMET:	NEOPRENE
O-RING:	BUNA-N

SPECIFICATIONS:	
TIGHTENING TORQUE:	7.5 Nm
TEMPERATURE:	-20°C - +100°C

APPROVALS:	
US	UL RECOGNIZED
CANADA	C-UL RECOGNIZED

PG42 LOCK NUT INCLUDED BUT NOT SHOWN

SEAL RATED TO: IP68

PART NUMBER	COLOR	SEALING RANGE
PCG-42	GRAY	30-38mm
PCG-42R	GRAY	25-31mm
PCG-42-B	BLACK	30-38mm
PCG-42R-B	BLACK	25-31mm

UNLESS OTHERWISE SPECIFIED:		NAME		MENCOM CORPORATION		
DIMENSIONS ARE IN INCHES AND [MM]		DRAWN	DWM		TITLE:	
		CHECKED				
		ENG APPR.				
		MFG APPR.				
		Q.A.				
MATERIAL	COMMENTS:		SIZE	DWG. NO.	REV	
B			PCG-42		B	
SCALE: 2:1			WEIGHT:	SHEET 1 OF 1		
DO NOT SCALE DRAWING						
FINISH						

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

SPECIFICATIONS	DO NOT SCALE DRAWING