



1 3/8" MIN Power Series Receptacles

3, 4 & 5 Conductor PMIN Receptacles, 10, 12 & 14AWG



Front Mount Receptacles | 3/4"-14 NPT Threads | IP67 Rating




5 pole is not UL listed.


D PMIN Receptacles

# of Poles	Male Faceview	Color Code	Rating	Wire AWG	Male Receptacles	Female Receptacles
3	 1.375"-16UN2	North American 1. Black 2. Green/Yellow 3. White	600V 35A	10 AWG	PMIN-30MR-**-34	PMIN-30FR-**-34
			600V 28A	12 AWG	PMIN-32MR-**-34	PMIN-32FR-**-34
			600V 24A	14 AWG	PMIN-34MR-**-34	PMIN-34FR-**-34
4	 1.375"-16UN2	North American 1. Black 2. Green/Yellow 3. Red 4. White	600V 32A	10 AWG	PMIN-40MR-**-34	PMIN-40FR-**-34
			600V 25A	12 AWG	PMIN-42MR-**-34	PMIN-42FR-**-34
			600V 20A	14 AWG	PMIN-44MR-**-34	PMIN-44FR-**-34
5	 1.375"-16UN2	North American 1. Black 2. Green/Yellow 3. Red 4. White 5. Gray	600V 25A	10 AWG	PMIN-450MR-**-34	PMIN-450FR-**-34

** Lengths in meters. 0.3m leads are standard. Longer lead lengths are available, please consult the factory for part numbers.

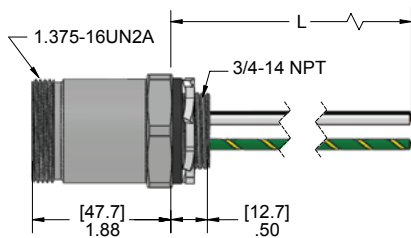

Male Receptacles

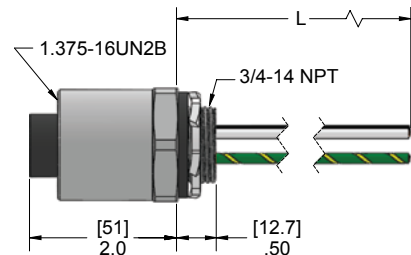

Female Receptacles

Specifications:

Shell: Nickel Plated Brass
 Insulator: 105°C, Oil Resistant Black PVC
 Wire: 10 AWG: UL Style 1015, 600V
 12 AWG: UL Style 1015, 600V
 14 AWG: UL Style 1015, 600V

Contacts: Copper Alloy with Gold Plating
 Gasket: TPE
 Lock Nut: Zinc Plated Steel
 Temperature: -40°C to 90°C (-40°F to +194°F)