





1 3/8" MIN Power Series Field Wireable Plugs

3 & 4 Conductor PMIN Series Field Wireable Plugs, 10-14AWG



Right Angle Field Wireable Plugs | 600 Volt MAX | IP67 Rating





# of Poles	Male Faceview	Rating	Wire AWG	Cable Types	Cable O.D. Range	Grommet Color	Male Right Angle	Female Right Angle	
3	 1.375"-16UN2	Cable Rated <75 °C 600VAC MAX 35A MAX Cable Rated 75°C+ 600VAC MAX 45A MAX	10-14 AWG	STOW, STOOW (US)	13-15 mm	Gray	PMIN-3MP-FW-R	PMIN-3FP-FW-R	
					13-18 mm	Black			
				TC-ER (US)	12-13 mm	Gray			
					12-13 mm	Black			
				SEOOW (US)	13-16 mm	Gray			
					13-18 mm	Black			
	STOW, STOOW (CN)	13-18 mm	Black						
	SEOOW (CN)	13-18 mm	Black						
4	 1.375"-16UN2	Cable Rated <75 °C 600VAC MAX 32A MAX Cable Rated 75°C+ 600VAC MAX 40A MAX	10-14 AWG	STOW, STOOW (US)	13-15 mm	Gray	PMIN-4MP-FW-R	PMIN-4FP-FW-R	
					13-18 mm	Black			
				TC-ER (US)	12-13 mm (0.468"-0.509")	Gray			
					12-13 mm (0.502"-0.509")	Black			
				SEOOW (US)	13-16 mm	Gray			
					13-18 mm	Black			
					STOW, STOOW (CN)	13-18 mm			Black
					SEOOW (CN)	13-18 mm			Black

D

PMIN Cordsets

Voltage and amperage ratings are cable dependent and are based on 600VAC 10 AWG cable.
Cables with lower voltage ratings or smaller wire gauge will lower these ratings.

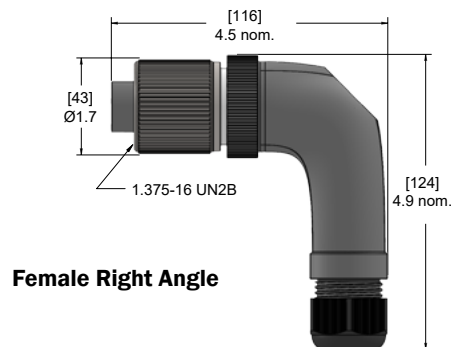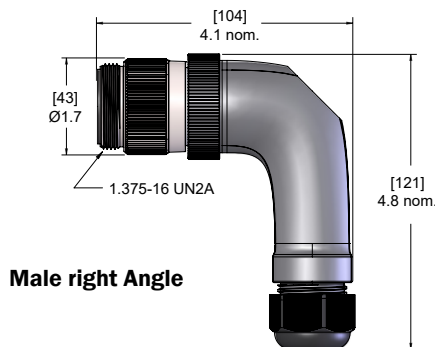

Specifications:

Body: Black Polyamide
Contacts: Copper Alloy with Gold Plating
O-Rings: NBR
Coupling Nut: Nickel Plated Brass

Insert: PBT
Connections: Screw Terminals
SCCR Rating: 65kA Breakers and Fuses
Temperature: -40 °C to +105°C (-40°F to +221°F)