



1 3/8" MIN Power Series Field Wireable Plugs

3 & 4 Conductor PMIN Series Field Wireable Plugs, 10-14AWG



Field Wireable Plugs | 600VAC MAX | IP67 Rating




D

PMIN Cordsets


| # of Poles | Male Faceview | Rating | Wire AWG | Cable Types | Cable O.D. Range | Grommet Color | Male Straight | Female Straight |
|------------------|---------------------|---|-----------|------------------|-----------------------------|---------------|---------------|-----------------|
| 3 | <p>1.375"-16UN2</p> | Cable Rated <75 °C 600VAC MAX 35A MAX Cable Rated 75°C+ 600VAC MAX 45A MAX | 10-14 AWG | STOW, STOOW (US) | 13-15 mm | Gray | PMIN-3MP-FW | PMIN-3FP-FW |
| | | | | | 13-18 mm | Black | | |
| | | | | TC-ER (US) | 12-13 mm | Gray | | |
| | | | | | 12-13 mm | Black | | |
| | | | | SEOOW (US) | 13-16 mm | Gray | | |
| | | | | | 13-18 mm | Black | | |
| STOW, STOOW (CN) | 13-18 mm | Black | | | | | | |
| | SEOOW (CN) | 13-18 mm | Black | | | | | |
| 4 | <p>1.375"-16UN2</p> | Cable Rated <75 °C 600VAC MAX 32A MAX Cable Rated 75°C+ 600VAC MAX 40A MAX | 10-14 AWG | STOW, STOOW (US) | 13-15 mm | Gray | PMIN-4MP-FW | PMIN-4FP-FW |
| | | | | | 13-18 mm | Black | | |
| | | | | TC-ER (US) | 12-13 mm (0.468"-0.509") | Gray | | |
| | | | | | 12-13 mm (0.502"-0.509") | Black | | |
| | | | | SEOOW (US) | 13-16 mm | Gray | | |
| | | | | | 13-18 mm | Black | | |
| STOW, STOOW (CN) | 13-18 mm | Black | | | | | | |
| | SEOOW (CN) | 13-18 mm | Black | | | | | |

Voltage and amperage ratings are cable dependent and are based on 600VAC 10 AWG cable. Cables with lower voltage ratings or smaller wire gauge will lower these ratings.

Male Straight

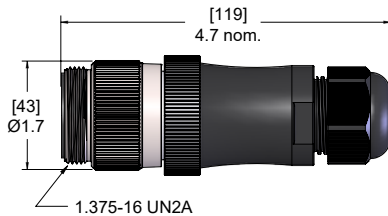

Female Straight

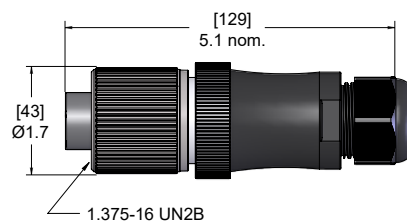

Specifications:

Body: Black Polyamide
 Contacts: Copper Alloy with Gold Plating
 O-Rings: NBR
 Coupling Nut: Nickel Plated Brass

Insert: PBT
 Connections: Screw Terminals
 SCCR Rating: 65kA Breakers and Fuses
 Temperature: -40 °C to +105°C (-40°F to +221°F)