
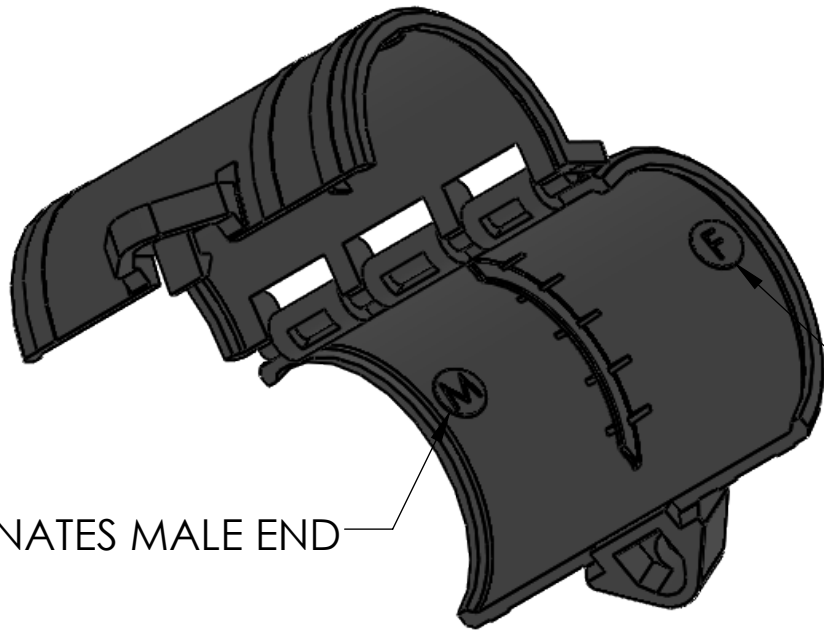
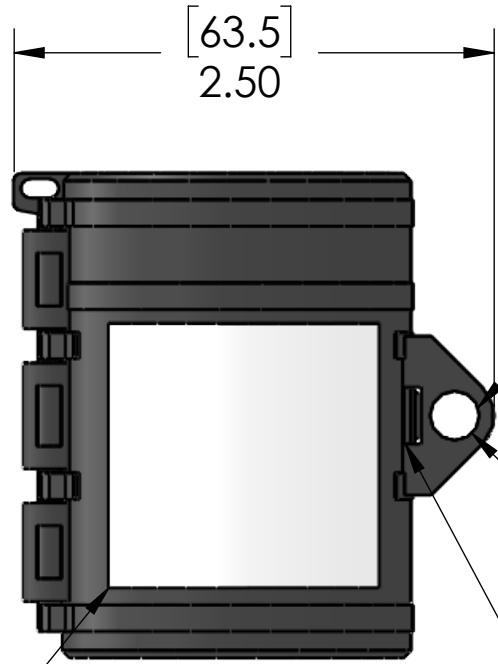
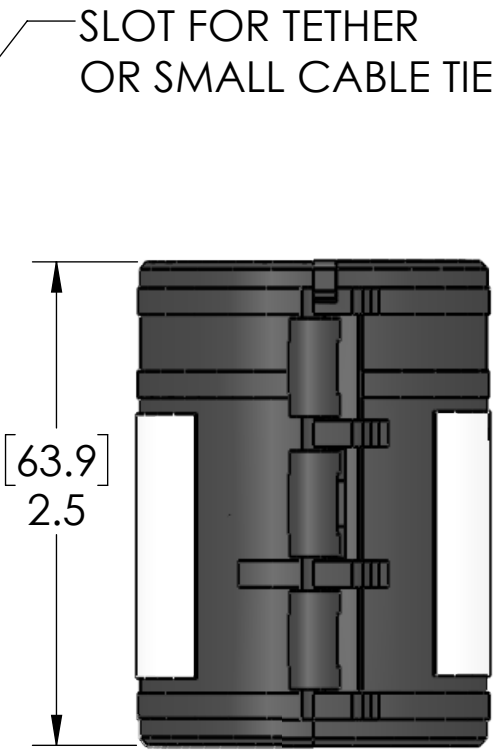
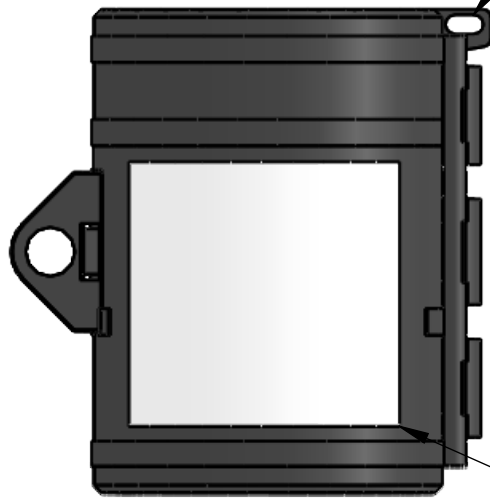
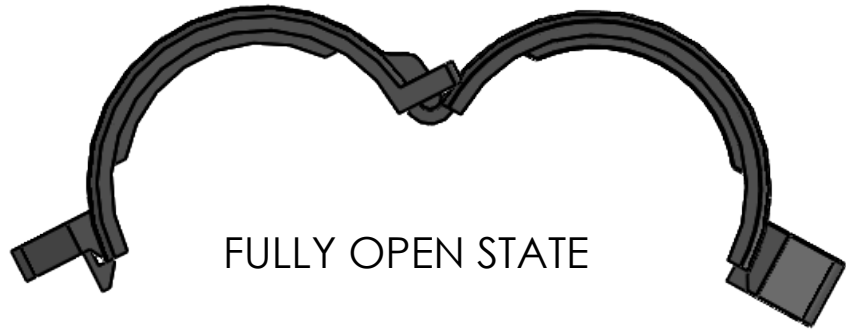


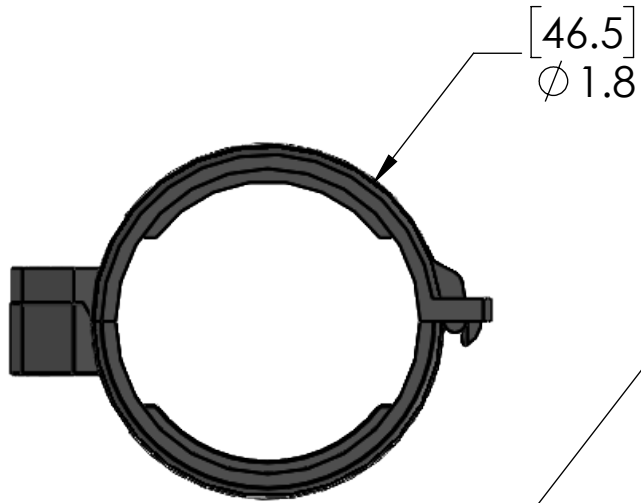

SLOT FOR TETHER
OR SMALL CABLE TIE

FULLY OPEN STATE

ADDITIONAL LOCK MAY
BE INSERTED HERE.

TO OPEN PMIN-LOCK, INSERT
FLAT BLADE SCREW DRIVER
INTO SLOT TO RELEASE INTERNAL
LATCH

TO INSTALL PMIN-LOCK, PLACE THE "M" SIDE OF LOCK
TOWARD MALE CONNECTOR AND "F" SIDE OF LOCK
TOWARD FEMALE CONNECTOR AND CLOSE UNTIL
LOCK SNAPS CLOSED.

WARNING LABELS

"F" DESIGNATES FEMALE END

"M" DESIGNATES MALE END

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
AND [MM]

MATERIAL
PA 66 - Black
FINISH

DO NOT SCALE DRAWING

DRAWN BY
ADM
DRAWN DATE
11/29/2017
CHECKED BY
BEM
CHECK DATE
03/01/2017

COMMENTS:

MENCOM CORPORATION

TITLE:

SIZE

B

DWG. NO.

PMIN-LOCK

REV

A

SCALE: 1:1

WEIGHT:

SHEET 1 OF 1