

PIN #	COLOR
1	BLACK
2	GREEN/YELLOW
3	RED
4	WHITE

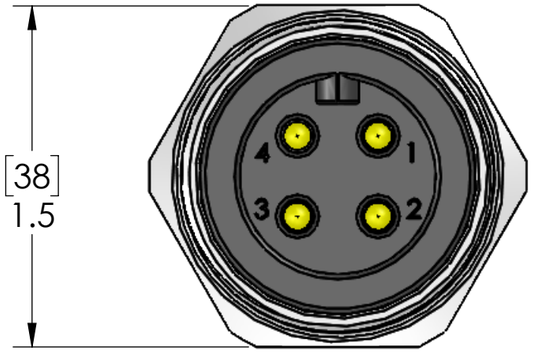

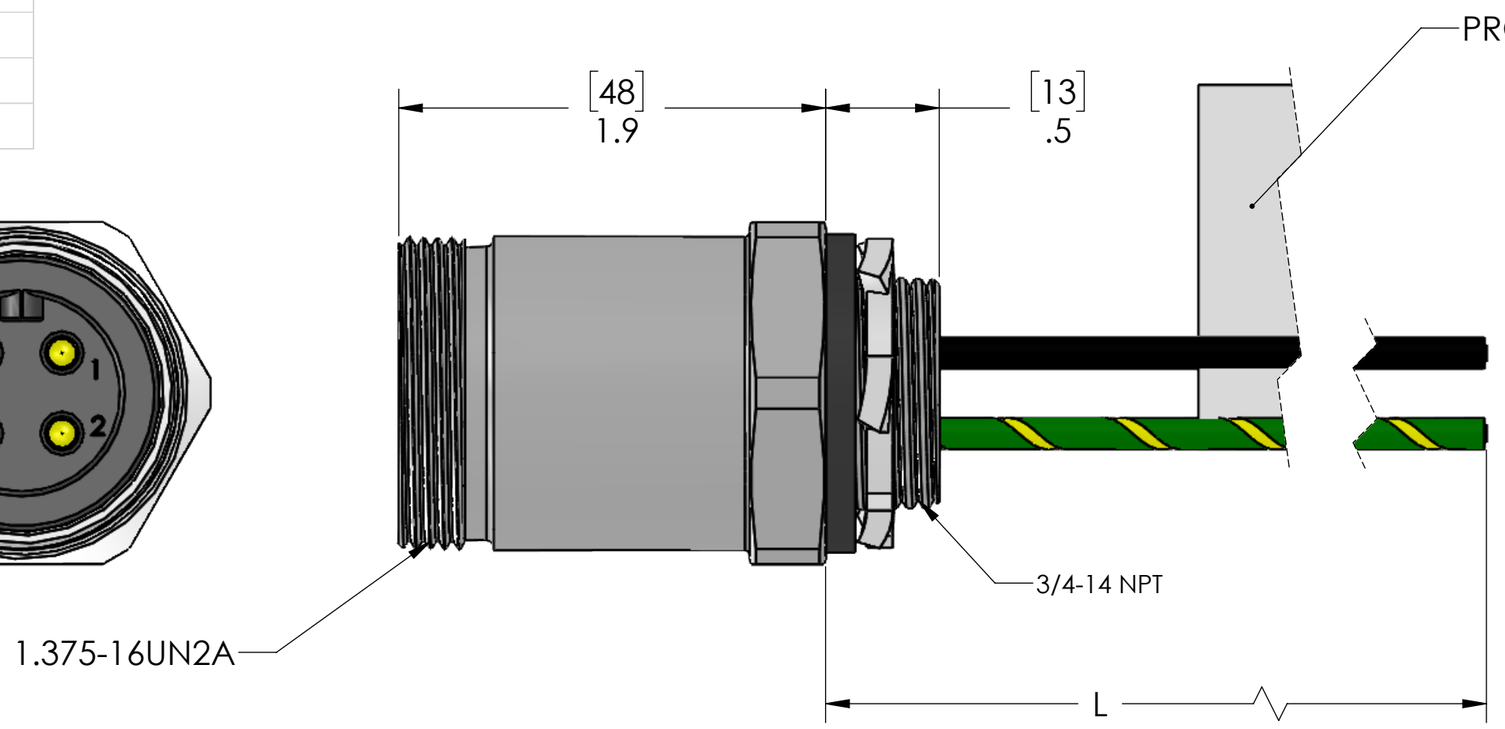

P/N	L
PMIN-44MR-0.3M-34	12" [0.3m]
PMIN-44MR-0.5M-34	20" [0.5m]
PMIN-44MR-1M-34	40" [1m]
PMIN-44MR-2M-34	79" [2m]
PMIN-44MR-3M-34	117" [3m]
PMIN-44MR-4M-34	157" [4m]
PMIN-44MR-5M-34	197" [5m]
PMIN-44MR-6M-34	236" [6m]
PMIN-44MR-8M-34	315" [8m]
PMIN-44MR-10M-34	393" [10m]

OTHER LENGTHS AVAILABLE
CONSULT FACTORY

MATERIALS	
BODY:	NICKEL PLATED BRASS
CONTACTS:	GOLD PLATED COPPER ALLOY
INSERT:	BLACK PVC
WIRE:	14AWG UL1015
JAM NUT:	ZINC PLATED STEEL
GASKET:	TPE

RATINGS:	
SCCR RATING:	65kA Breakers and Fuses
RoHS COMPLIANT:	Yes
PROTECTION:	IP67
UL CATEGORY:	PVVA (US), PVVA7 (Canada)
U.S.	UL 2237 LISTED, File E469485
CANADA	C-UL 2237 LISTED, File E469485

CAUTION:

RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	600V
AMPS	20A
TEMP:	-40°C - 90°C

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]

MATERIAL

FINISH

DO NOT SCALE DRAWING

DRAWN BY	JJH
DRAWN DATE	06/22/2020
CHECKED BY	GO
CHECK DATE	06/23/2020

COMMENTS:

MENCOM CORPORATION

TITLE:
4 PL MAL PMIN RCP 3/4 NPT

SIZE B | DWG. NO. PMIN-44MR-ZZ-34 | REV B

SCALE: 3:2 | WEIGHT: | SHEET 1 OF 1