
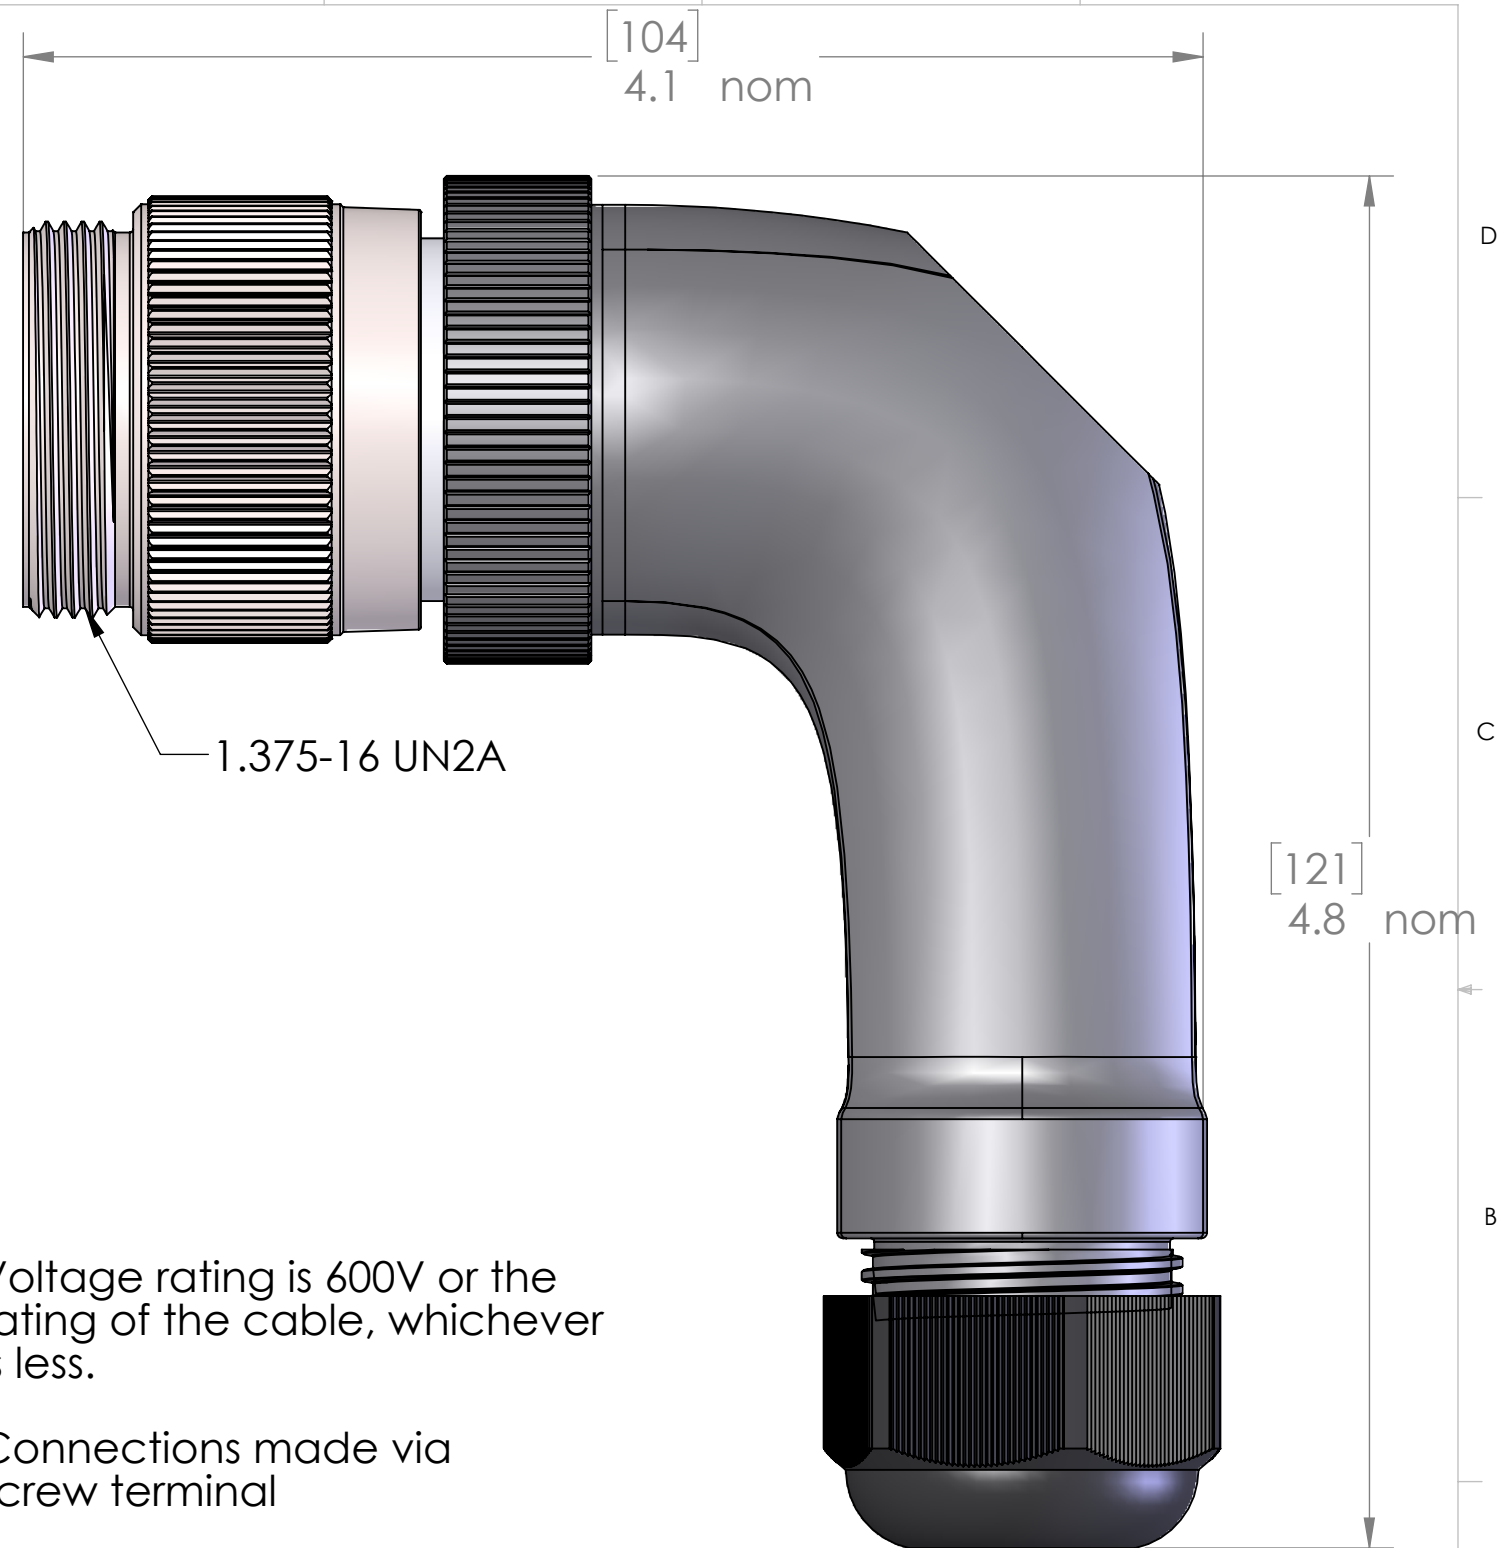


|                  |                                      |                   |                   |
|------------------|--------------------------------------|-------------------|-------------------|
| MATERIALS:       |                                      |                   |                   |
|                  |                                      |                   |                   |
| BODY:            | BLACK POLYAMIDE                      |                   |                   |
| CONTACTS:        | GOLD PLATED COPPER ALLOY             |                   |                   |
| CABLE SEAL:      | NBR                                  |                   |                   |
| INSERT:          | PBT                                  |                   |                   |
| COUPLING:        | NICKEL PLATED BRASS                  |                   |                   |
|                  |                                      |                   |                   |
| RATINGS:         |                                      |                   |                   |
|                  | AWG                                  | CABLE RATED <75°C | CABLE RATED 75°C+ |
| AMPS:            | 10AWG                                | 32A               | 40A               |
|                  | 12AWG                                | 25A               | 30A               |
|                  | 14AWG                                | 20A               | 24A               |
|                  |                                      |                   |                   |
| VOLTS:           | 600VAC MAX                           |                   |                   |
|                  |                                      |                   |                   |
| CABLE RANGE:     | 10 AWG - 14AWG                       |                   |                   |
| STOW, STOOW (US) | .530"-.576" (13-15mm) Gray Grommet   |                   |                   |
|                  | .542"-.707" (13-18mm) Black Grommet  |                   |                   |
| TC-ER (US)       | .468"-.509" (12-13mm) Gray Grommet   |                   |                   |
|                  | .502"-.509" (12-13mm) Black Grommet  |                   |                   |
| SEOOW (US)       | .516"-.630" (13-16mm) Gray Grommet   |                   |                   |
|                  | .516"-.7185" (13-18mm) Black Grommet |                   |                   |
| STOW, STOOW (CN) | .542"-.707" (13-18mm) Black Grommet  |                   |                   |
| SEOOW (CN)       | .516"-.718" (13-18mm) Black Grommet  |                   |                   |
|                  |                                      |                   |                   |
| SCCR RATING:     | 65kA Breakers and Fuses              |                   |                   |
| RoHS COMPLIANT:  | Yes                                  |                   |                   |
| PROTECTION:      | IP67                                 |                   |                   |
| UL CATEGORY:     | PVVA (US), PVVA7 (Canada)            |                   |                   |
| U.S.             | UL 2237 LISTED, File E469485         |                   |                   |
| CANADA           | C-UL 2237 LISTED, File E469485       |                   |                   |

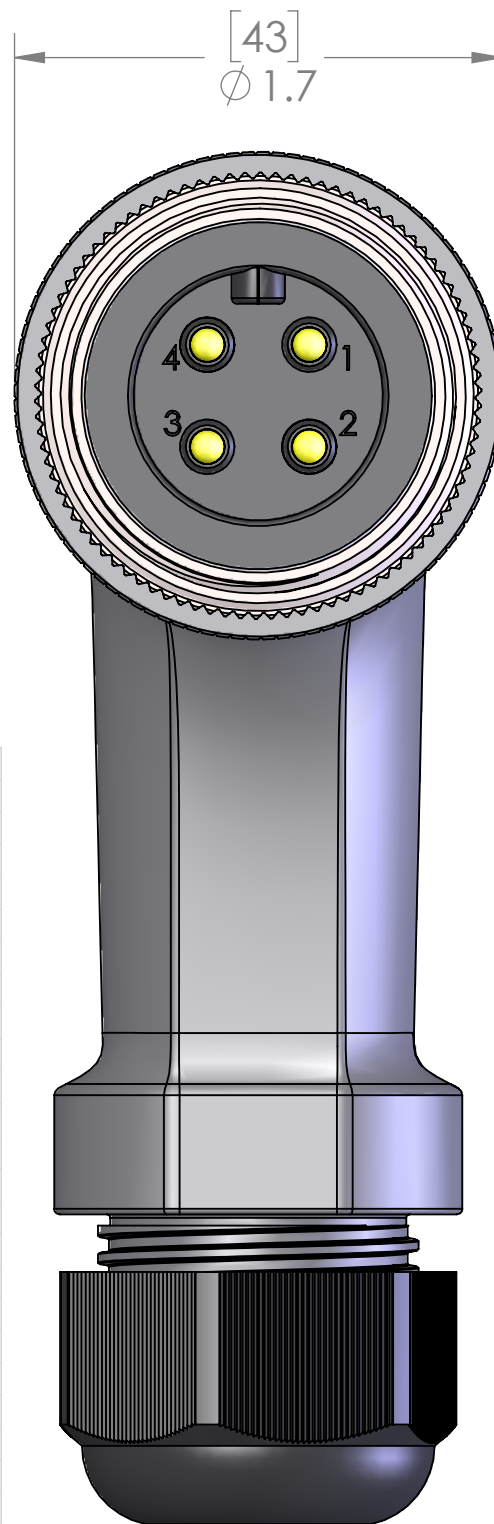

Voltage rating is 600V or the rating of the cable, whichever is less.

Connections made via  
screw terminal

**PROPRIETARY AND CONFIDENTIAL**

THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
MENCOM CORPORATION. ANY  
REPRODUCTION IN PART OR AS A WHOLE  
WITHOUT THE WRITTEN PERMISSION OF  
MENCOM CORPORATION IS  
PROHIBITED.

|                                   |  |            |            |                    |                               |                     |        |
|-----------------------------------|--|------------|------------|--------------------|-------------------------------|---------------------|--------|
| UNLESS OTHERWISE SPECIFIED:       |  | DRAWN BY   | JJH        | MENCOM CORPORATION |                               |                     |        |
| DIMENSIONS ARE IN INCHES AND [MM] |  | DRAWN DATE | 01/06/2021 |                    |                               |                     | TITLE: |
|                                   |  | CHECKED BY |            |                    |                               |                     |        |
|                                   |  | CHECK DATE |            |                    |                               |                     |        |
|                                   |  |            |            |                    |                               |                     |        |
|                                   |  | COMMENTS:  |            | SIZE<br><b>B</b>   | DWG. NO.<br><br>PMIN-4MP-FW-R | REV<br><br><b>A</b> |        |
| MATERIAL                          |  |            |            |                    |                               |                     |        |
| FINISH                            |  |            |            |                    |                               |                     |        |
| DO NOT SCALE DRAWING              |  |            |            |                    |                               |                     |        |

DO NOT SCALE DRAWING