



FEMALE	WIRE	FEMALE
PIN #		PIN #
1	----	1
2	----	2
3	----	3
4	----	4
CPLG	SHIELD	CPLG

D

C

B

A

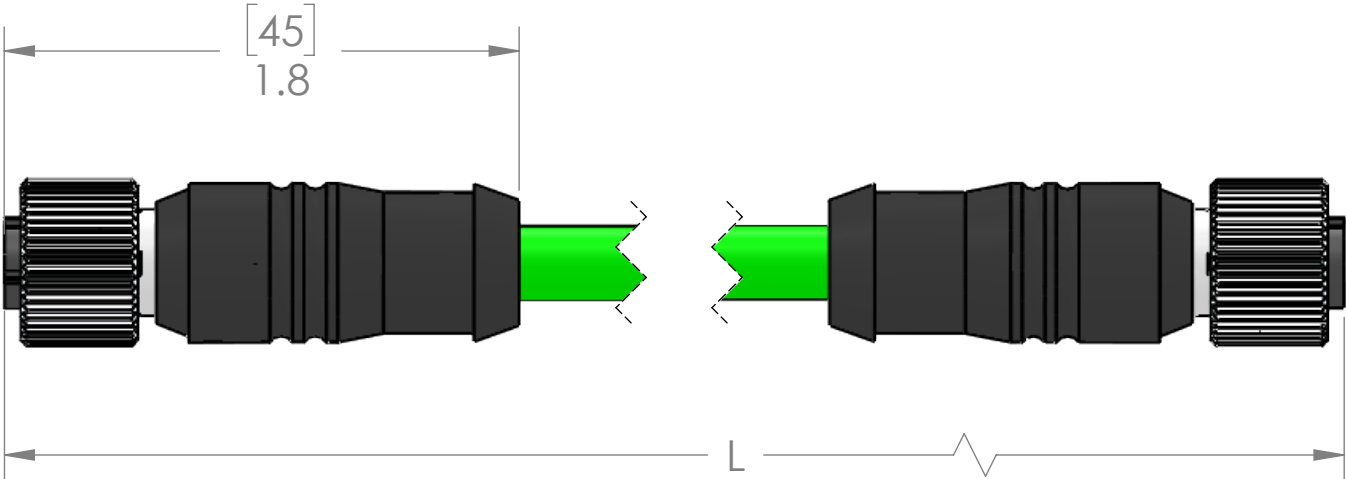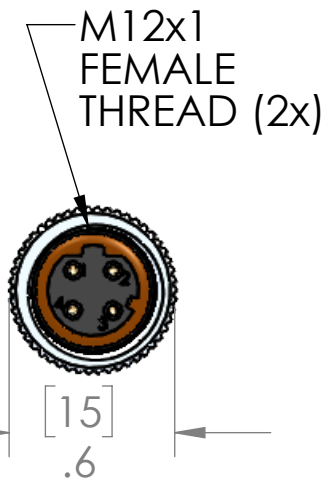

D-CODED
FEMALE (2x)

TABLE A		
P/N	L	STD?
PND45-4FFPS-1M	40" [1m]	YES
PND45-4FFPS-2M	79" [2m]	YES
PND45-4FFPS-3M	118" [3m]	NO
PND45-4FFPS-4M	157" [4m]	YES
PND45-4FFPS-5M	197" [5m]	YES
PND45-4FFPS-6M	236" [6m]	YES
PND45-4FFPS-8M	315" [8m]	NO
PND45-4FFPS-9M	354" [9m]	NO
PND45-4FFPS-10M	393" [10m]	YES
PND45-4FFPS-15M	590" [15m]	YES
PND45-4FFPS-20M	786" [20m]	NO
PND45-4FFPS-25M	983" [25m]	NO
PND45-4FFPS-30M	1179" [30m]	NO

MATERIALS	
BODIES:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	22/4 PROFINET CBL, GREEN PVC JACKET
COUPLINGS:	NICKEL PLATED BRASS
INSERTS:	POLYAMIDE
O-RINGS:	FPM

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	30V
AMPS	4A
TEMP:	80°C

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]	DRAWN BY	ADM
	DRAWN DATE	04/27/2020
	CHECKED BY	JJH
	CHECK DATE	04/27/2020
	COMMENTS:	
MATERIAL		
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION		
TITLE: 4 PL F-F PROFI PLUG		
SIZE	DWG. NO.	REV
B	PND45-4FFPS-ZZ	B
SCALE: 3:2		WEIGHT:
		SHEET 1 OF 1

D

C

B

A