



T35 DIN Rail Interface Modules

Power Distribution Modules




3 Pole Terminal Block to 3 Pole Pluggable Terminal Blocks | 250V, 50 & 15amps

Connection Type A	Connection Type B	Rating	Wire Range	Part Number	
				Marker Tag	No Marker Tag
3 Pole Terminal Block	3 Pole Pluggable Terminal Block	1 x 250V, 50A 6 x 250V, 15A	1 x 6-20 AWG 6 x 12-24 AWG	T35-3WPDx6-MC	T35-3WPDx6


The printed circuit boards have component holes for the easy addition of LED's, resistors, or other electronic components. Other configurations are available. Please consult factory.

Specifications:

Body:	Polyamide
Screw:	Galvanized Steel
Terminal:	Tin-Plated Brass
Clamp:	Nickel Brass
Insulators:	Glass-Filled Thermoplastic
Contacts:	Gold-Plated Copper Alloy
Marker Tags:	Polyamide
Wire Strip Length:	0.3in (6.7mm)
Screw Torque:	4.4lbf-in (0.5Nm)
Screw Size:	4-40
Temperature:	-40 °C to 105 °C

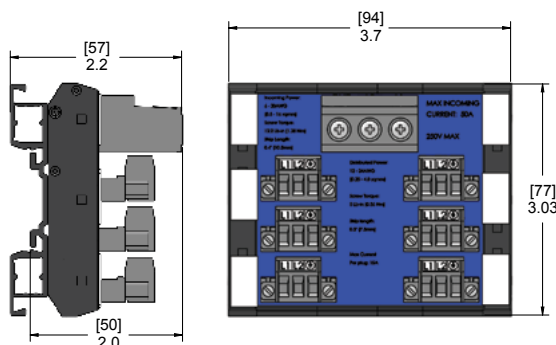

3 Pole Terminal block to
3 Pole Pluggable Terminal Blocks
with 6 Removable Marker Tags

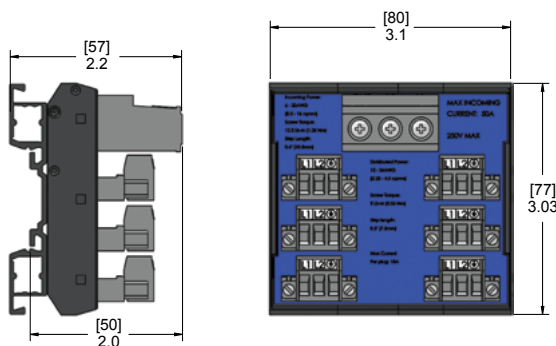

3 Pole Terminal block to
3 Pole Pluggable Terminal Blocks